




**PULLBOX TYPES
1, 2 AND 3**

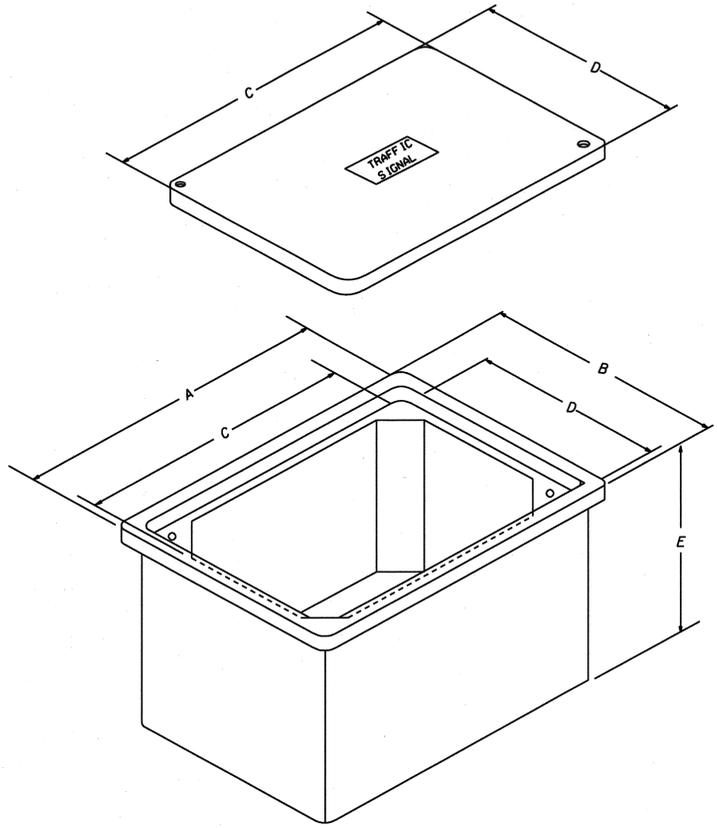


TYPE 4, 5, 4S, 5S, 6, AND 7 PULLBOX ASSEMBLIES

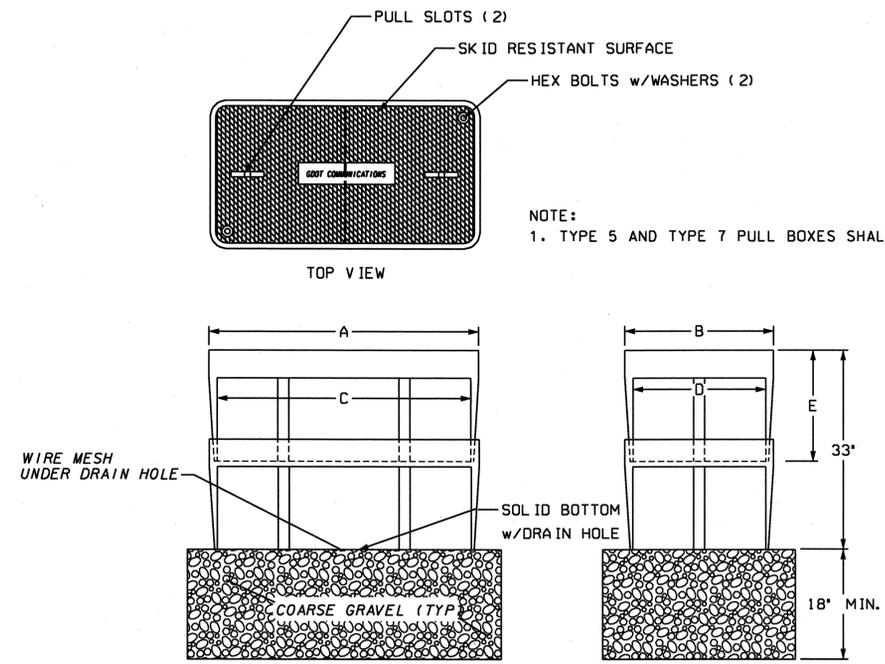

**TYPE 4 AND 5
STACKABLE ASSEMBLY**

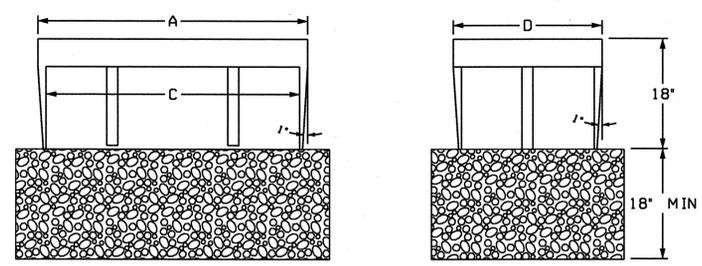


TYPE 4S AND 5S

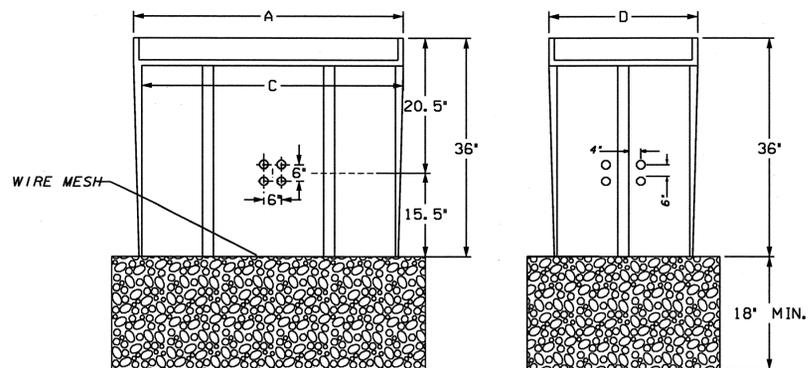


TYPE 6 AND 7

**TYPICAL CONDUIT ENTRANCE DETAILS
TYPE 1, 2, 3, 4S & 5S**

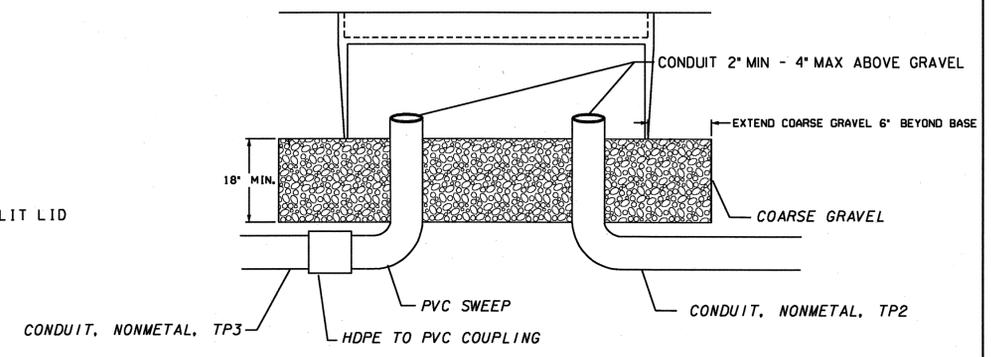

FIBER OPTIC CABLE MANAGEMENT IN TYPE 4, 5, 6 & 7 PULL BOX

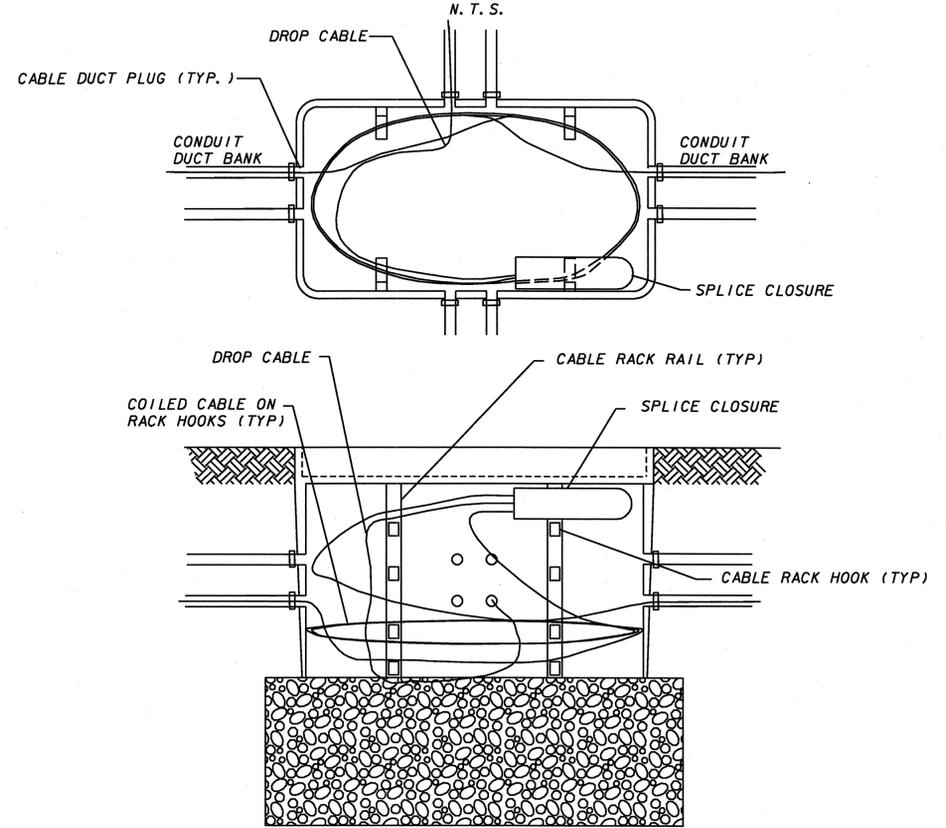

FIBER TRUNK AND DROP CABLE IN CLOSURE SHALL BE COILED TOGETHER. SEPARATE FIBER CABLES SHALL BE COILED SEPARATELY AND SUPPORTED ON SEPARATE RACK HOOKS.

PULL BOX TYPE	* SIZE (IN.)				
	A	B	C	D	E
1	14	14	12	12	12
2	21	14	18	11	12
3	33	20	30	17	12
4S	38	26	36	24	18
4	38	26	36	24	36
5S	50	32	48	30	18
5	50	32	48	30	36
6	38	26	36	24	36
7	50	32	48	30	36

- NOTES:**
- SIZES SHOWN ARE MINIMUM TRADE SIZES.
 - DIMENSIONS "C" AND "D" ARE MINIMUM REQUIREMENTS WITH A TOLERANCE OF NO MORE THAN (-.050 IN/ + 2 IN)
 - EXTEND COARSE GRAVEL 6" BEYOND BASE OF PULL BOX
 - PULL BOXES TYPE 4, 4S, 5, 5S, 6 & 7 SHALL HAVE 1° (DEGREE) FLARES FOR MAXIMUM STRENGTH
 - DESIGN PULL BOXES TO MEET OR EXCEED THE TIER LOADING SET FORTH IN SPECIFICATIONS 647.

Guidelines For Usage On Metric Projects
When these details are incorporated into plans and or projects that are being prepared or constructed in metric units, exact or precise conversion to metric units is not required. The dimensions shown that are in feet and inches may be converted to corresponding metric units using the following "Rounded-Off" conversion factors: 1"=25mm, 4"=100mm, and 12"=300mm. All measurement notes that refer to linear feet and square yards shall be interpreted to mean linear meters and square meters.

DATE		DEPARTMENT OF TRANSPORTATION STATE OF GEORGIA	
REVISION		TRAFFIC SIGNAL DETAIL PULLBOX ASSEMBLY AND INSTALLATION	
BY		APRIL 2010	DETAIL NUMBER TS-02
NOT TO SCALE - REPORT ERRORS			