



STATE	PROJECT NUMBER	SHEET NO.	TOTAL SHEETS
GA.	STP00-0000-001/001	76	187


DETAIL OF 6" OR 8" CONCRETE VALLEY GUTTER WITH CURB

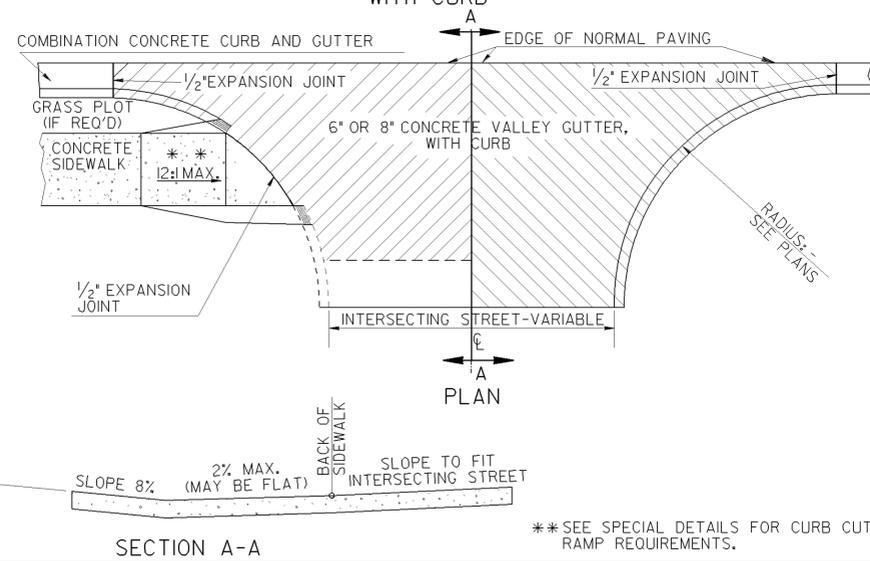


DETAIL OF PLACING PAVEMENT ADJACENT TO GUTTER

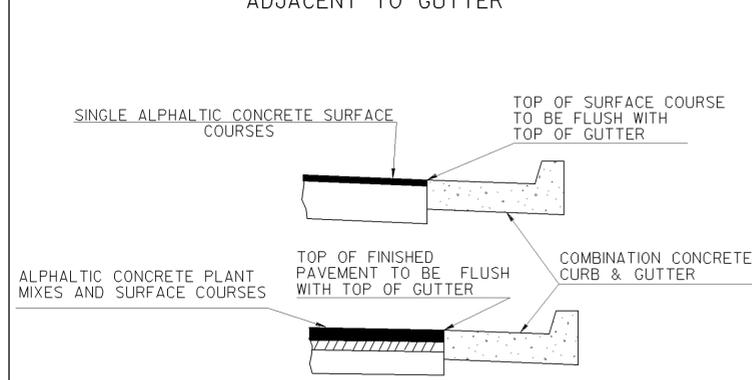


DETAIL OF ADDITIONAL PAVING AT STREET INTERSECTION

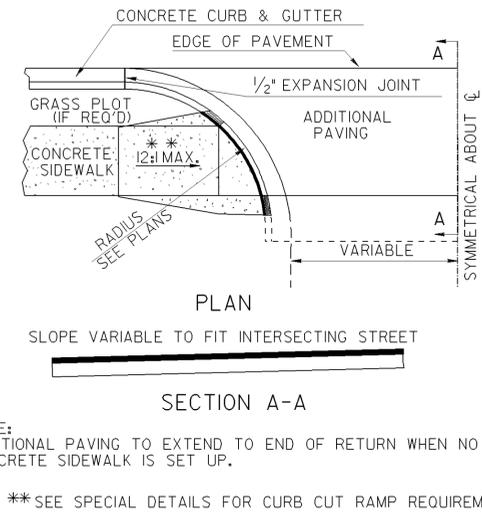


DETAIL OF 6" OR 8" CONCRETE VALLEY GUTTER WITHOUT CURB

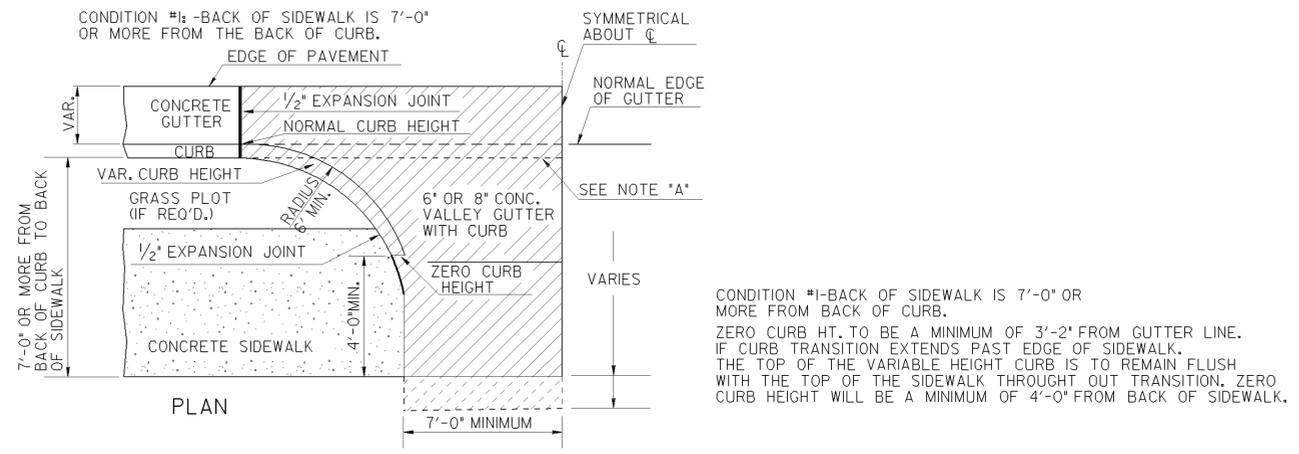

DETAIL OF 4' CORRUGATED CONCRETE MEDIAN

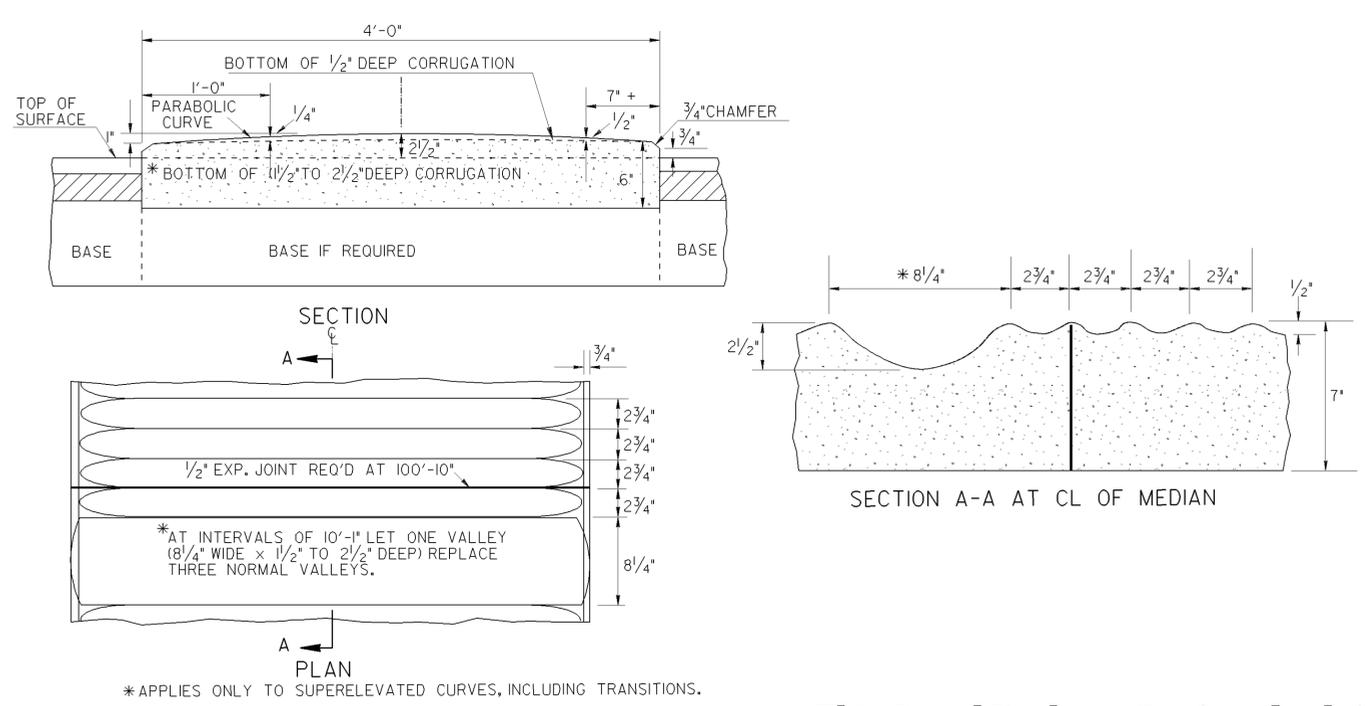


NOTE: "A" CONSTRUCTION JOINT OPTIONAL: -WHEN IMPLEMENTED #4 TIE BARS WILL BE REQUIRED AS SHOWN BELOW TO BE INCLUDED IN UNIT PRICE FOR VALLEY GUTTER. IF CURB IS POURED THROUGH VALLEY GUTTER, THE TOP PORTION WILL BE REMOVED BEFORE SETTING TO MATCH GRADE OF VALLEY GUTTER.

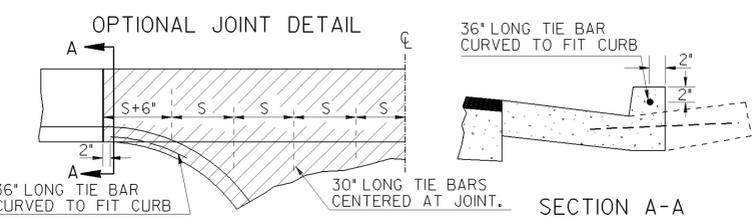

SEE SPECIAL DETAILS FOR DETAILS OF CONCRETE SIDEWALK.

This Detail Replaces Ga Standard 9031J

Guidelines For Usage On Metric Projects
When these details are incorporated into plans and or projects that are being prepared or constructed in metric units, exact or precise conversion to metric units is not required. The dimensions shown that are in feet and inches may be converted to corresponding metric units using the following "Rounded-Off" conversion factors: 1" = 25mm, 4" = 100mm, and 12" or 1' = 300mm. All measurement notes that refer to linear feet and square yards shall be interpreted to mean linear meters and square meters.

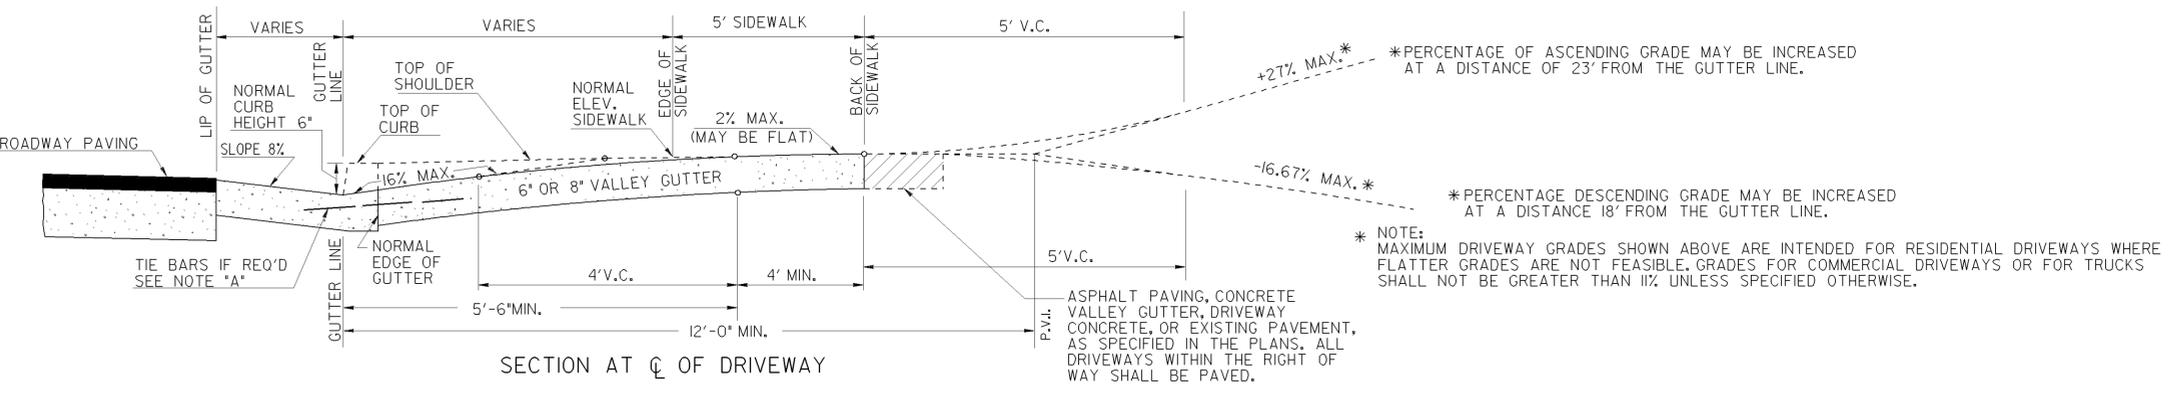

DEPARTMENT OF TRANSPORTATION			
STATE OF GEORGIA			
CONSTRUCTION DETAIL			
CONCRETE VALLEY GUTTER AT STREET INTERSECTION			
6" OR 8" CONCRETE VALLEY GUTTER AT DRIVE			
PLACING PAVEMENT ADJACENT TO GUTTER			
ADDITIONAL PAVING AT STREET INTERSECTION			
4' CORRUGATED CONCRETE MEDIAN			
NO SCALE		MARCH 12, 2002	
NUMBER		A2	