
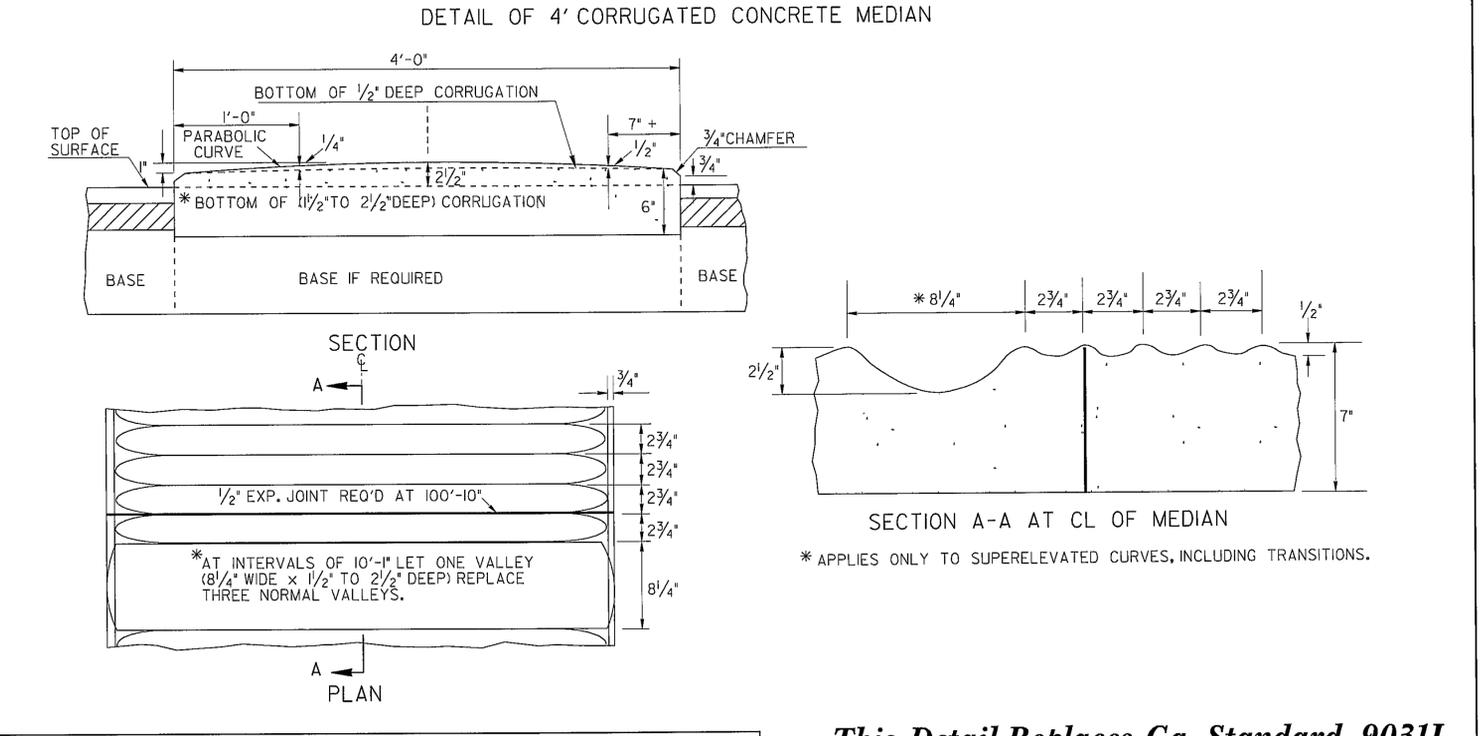
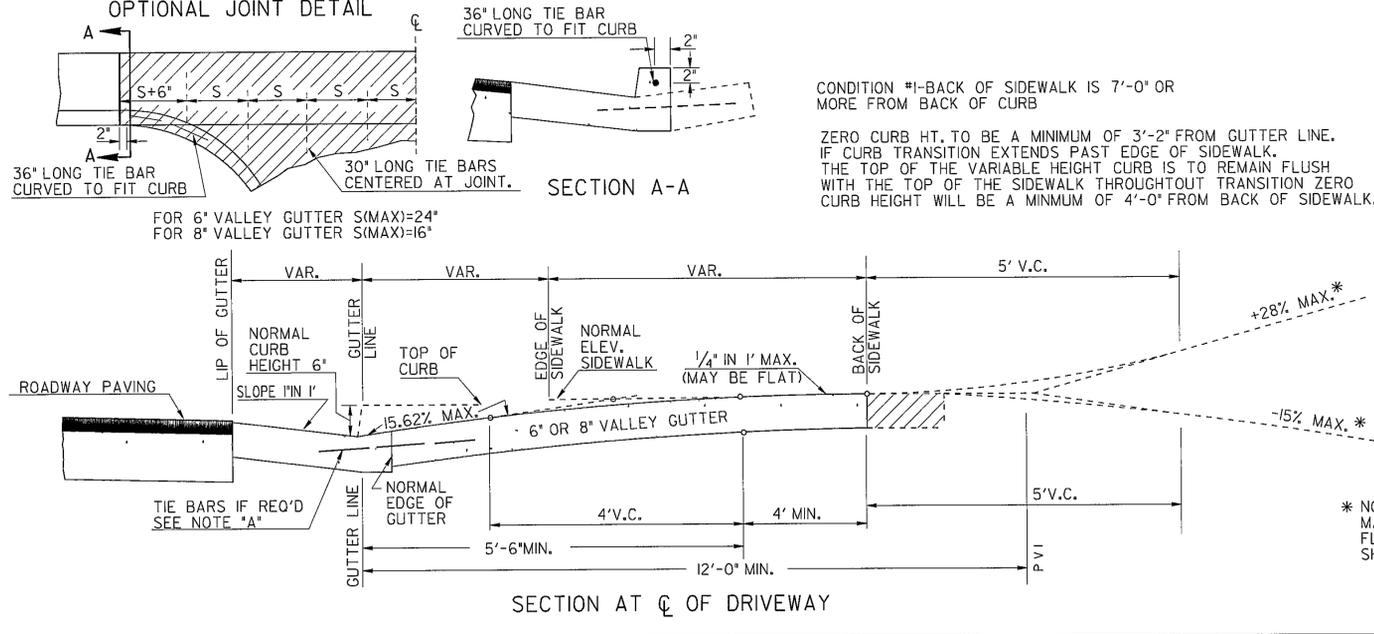
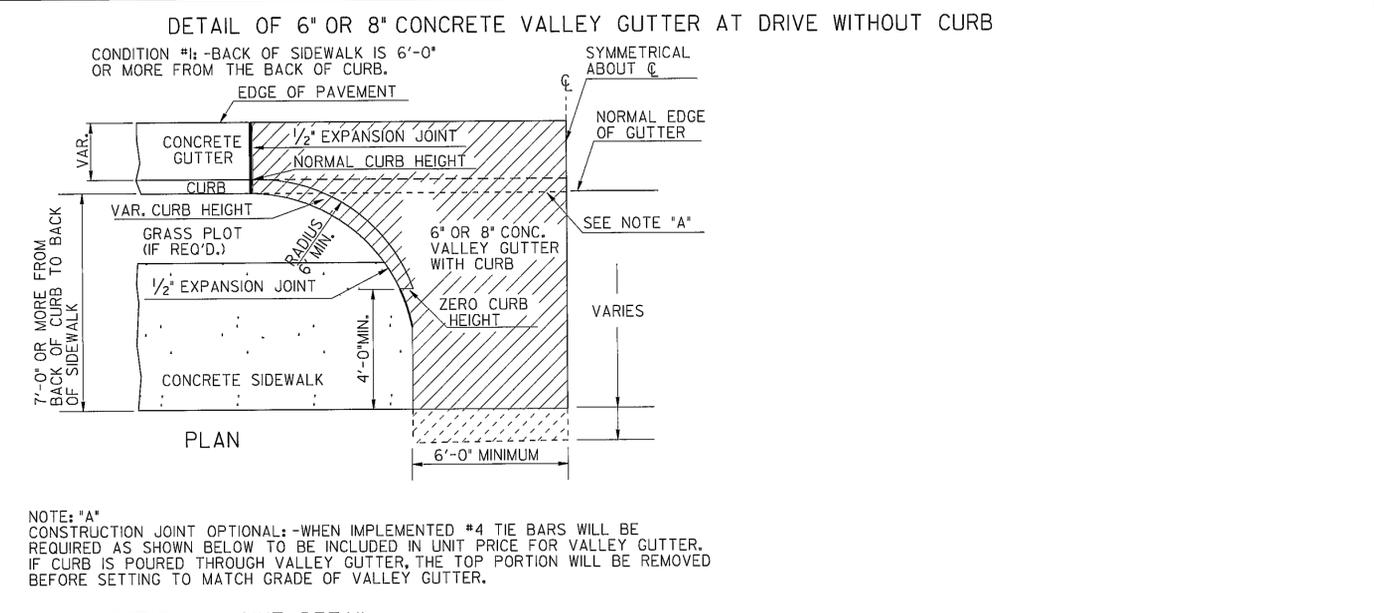
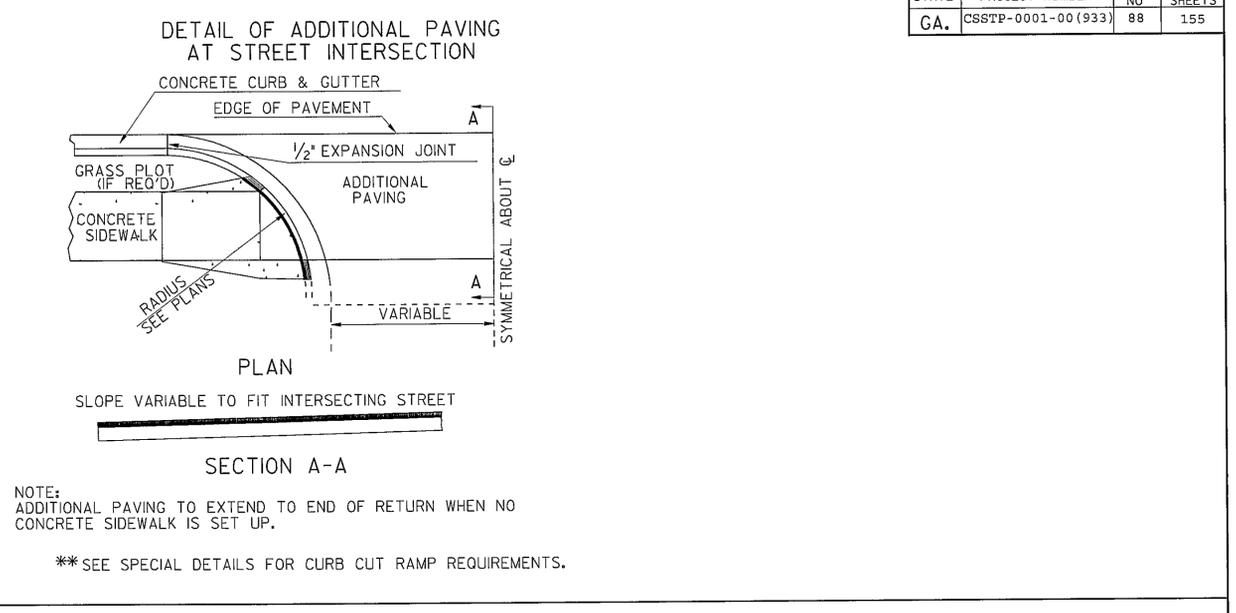
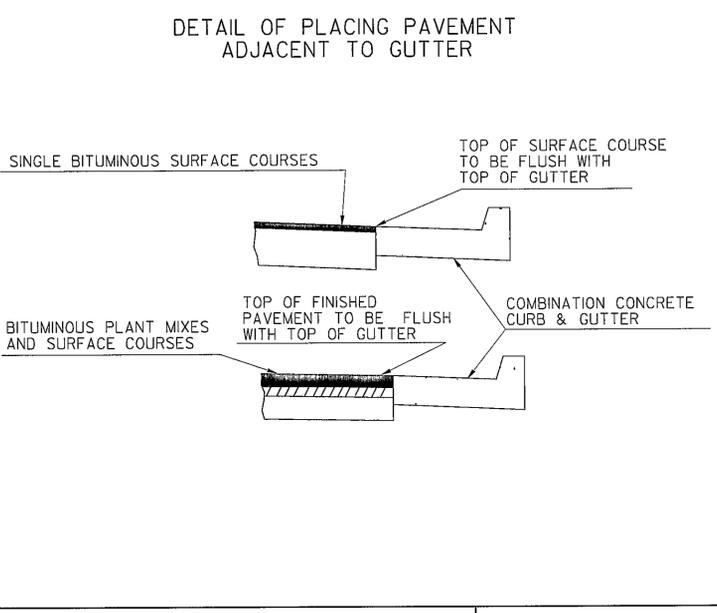


STATE	PROJECT NUMBER	SHEET NO	TOTAL SHEETS
GA.	CSSTP-0001-00 (933)	88	155

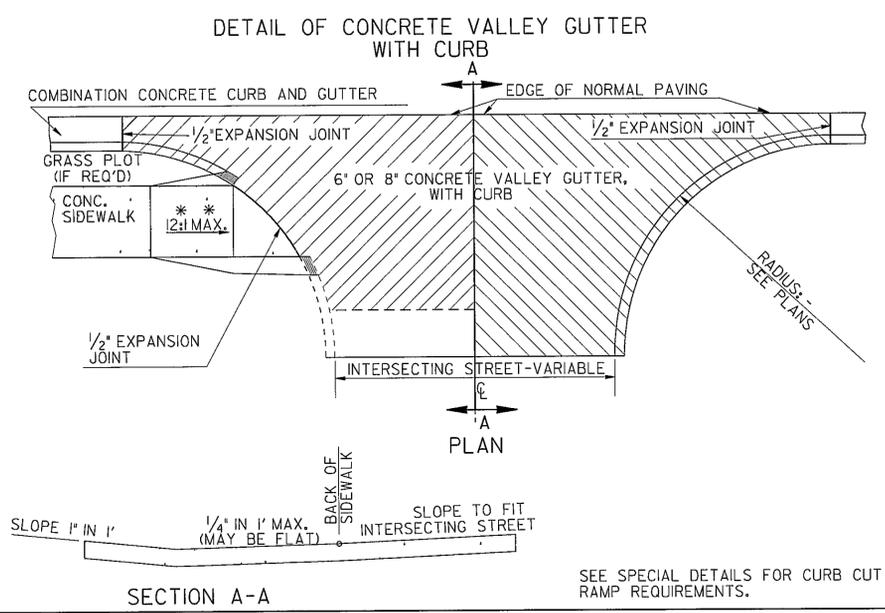

SEE SPECIAL DETAILS FOR DETAILS OF CONCRETE SIDEWALK.

PERCENTAGE OF ASCENDING GRADE MAY BE INCREASED AT A DISTANCE OF 23' FROM THE GUTTER LINE. \*

PERCENTAGE DESCENDING GRADE MAY BE INCREASED AT A DISTANCE 18' FROM THE GUTTER LINE. \*

\* NOTE: MAXIMUM DRIVEWAY GRADES SHOWN ABOVE ARE INTENDED FOR RESIDENTIAL DRIVEWAYS WHERE FLATTER GRADES ARE NOT FEASIBLE. GRADES FOR COMMERCIAL DRIVEWAYS OR FOR TRUCKS SHALL NOT BE GREATER THAN 11% UNLESS SPECIFIED OTHERWISE.

### This Detail Replaces Ga Standard 9031J

Guidelines For Usage On Metric Projects

When these details are incorporated into plans and or projects that are being prepared or constructed in metric units, exact or precise conversion to metric units is not required. The dimensions shown that are in feet and inches may be converted to corresponding metric units using the following "Rounded-Off" conversion factors 1"=25mm, 4"=100mm, and 12" or 1'-300mm. All measurement notes that refer to linear feet and square yards shall be interpreted to mean linear meters and square meters.

2-21-03	DATE	DEPARTMENT OF TRANSPORTATION
4-11-02	REVISION	STATE OF GEORGIA
4-3-02	REVISION	SPECIAL DETAIL
	REVISION	CONCRETE VALLEY GUTTER AT STREET INTERSECTION
	REVISION	6" OR 8" CONCRETE VALLEY GUTTER AT DRIVE
	REVISION	PLACING PAVEMENT ADJACENT TO GUTTER
	REVISION	ADDITIONAL PAVING AT STREET INTERSECTION
	REVISION	4' CORRUGATED CONCRETE MEDIAN
	REVISION	NO SCALE
	REVISION	MARCH 12, 2002
	BY	A2