

CONCRETE STRAIN POLE


Guidelines For Usage On Metric Projects

When these details are incorporated into plans and or projects that are being prepared or constructed in metric units, exact or precise conversion to metric units is not required. The dimensions shown that are in feet and inches may be converted to corresponding metric units using the following "Rounded-Off" conversion factors: I" =25mm, 4"=100mm, and 12" or 1'=300mm. All measurement notes that refer to linear feet and square yards shallbe interpreted to mean linear meters and square meters.

CONCRETE STRAIN POLE FOOTING WILL INCLUDE THE SAME FOOTING DESIGN AS A "SIMILAR" DESIGN STEEL POLE. THE STEEL REINFORCEMENT FROM STRAIN POLE AND MAST ARM POLE FOUNDATION DESIGN SHEET WILL BE INSTALLED AROUND THE CONCRETE STRAIN POLE. BACK FILL THE POLE AS DESCRIBED IN THE "CAISSON DETAIL UP TO THE LEVEL OF THE CONDUIT ENTRANCE/ HAND HOLE DEPTH. ONCE THE CONDUIT AND WIRE CONNECTING ARE MADE INSIDE THE POLE, FINISH BACK FILLING ACCORDING TO "CAISSON DETAIL."

ALL POLES SHALL HAVE ATTACHMENT POINTS 2'(MIN.) ABOVE ACTUAL ATTACHMENT POINT FOR FUTURE USE.

NO DRILLING OF POLE WITHOUT APPROVAL FROM GOOT BRIDGE OFFICE.

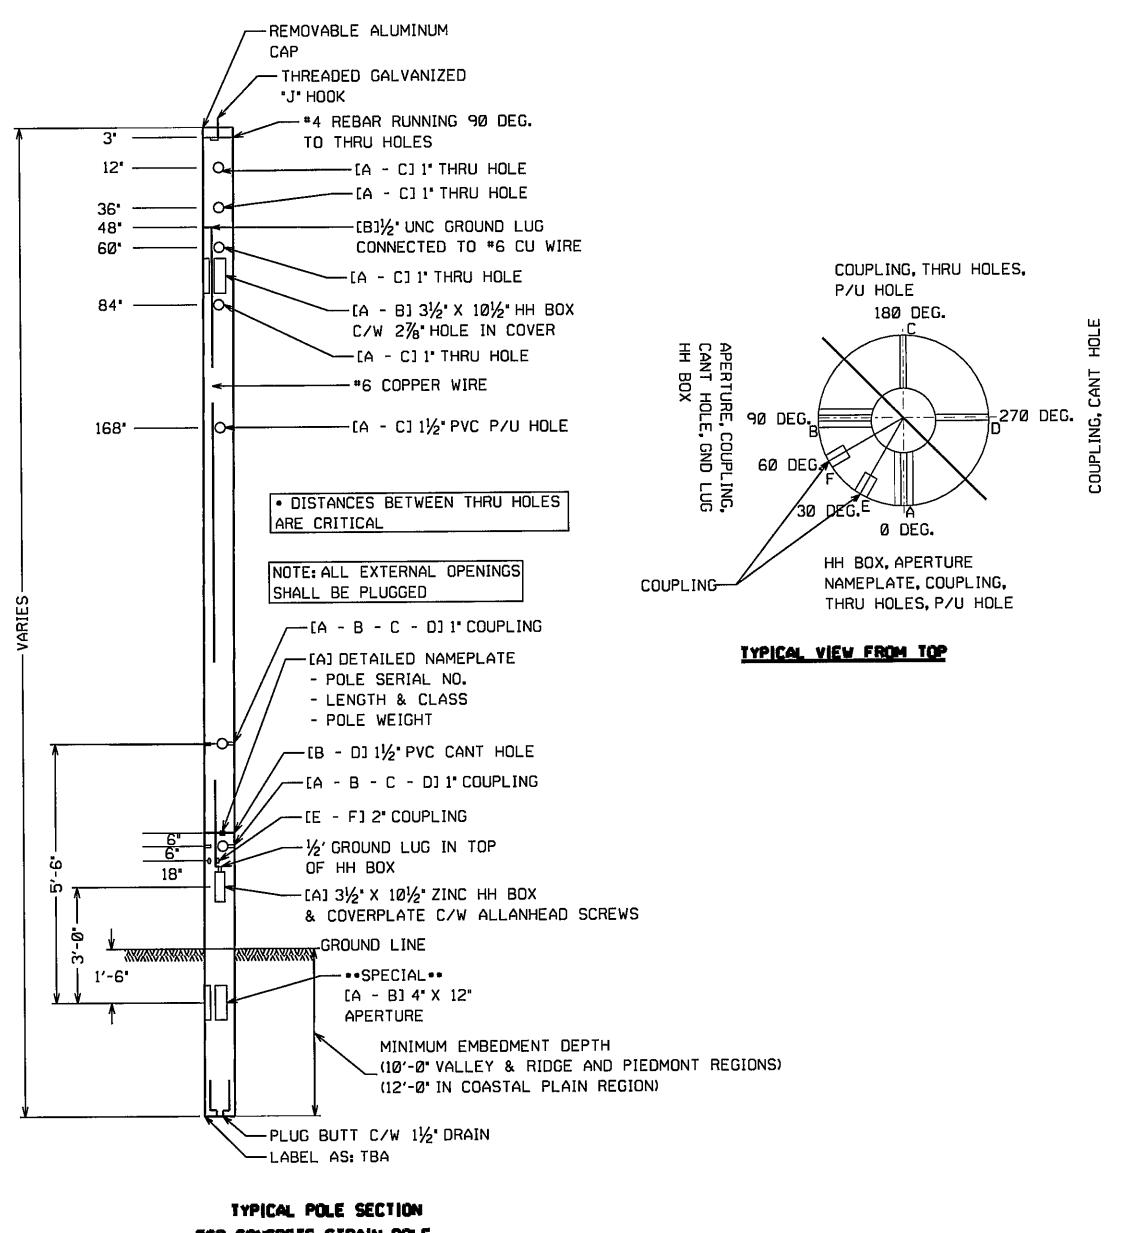

FOR CONCRETE STRAIN POLE

DATE	DEPARTMENT OF TRANSPORTATION STATE OF GEORGIA	
REVISION DESCRIPTION	TRAFFIC SIGNAL DETAIL DETAILS OF CONCRETE POLES	
REV. BY:	APRIL 2010 NOT TO SCALE - REPORT ERRORS	DETAIL NUMBER