

NOTE: ACTUAL LOCATION OF THE FENCE MAY BE VARIED TO SUIT LOCAL CONDITIONS.

* WIRE FENCE REQUIRED ONLY WITH TYPE 'C' SILT FENCE.





TEMPORARY SILT FENCES ARE FOR USE WHERE IT HAS BEEN DETERMINED THAT BALED STRAW EROSION CHECKS ARE INADEQUATE OR THAT SILT FENCES CAN BE JUSTIFIED ON A COST EFFECTIVE BASIS.

TEMPORARY SILT FENCES ARE NOT TO BE CONFUSED WITH SILT RETENTION BARRIERS.

SEE SECTION 171 FOR SILT FENCE SPECIFICATIONS.



FENCE TYPE	POST LENGTH	H	D	W	TYPICAL USES
TYPE 'A'	4 FT.	2'-2"	1'-6"	3'-0"	WHERE FILL EXCEEDS 10 FT. HEIGHT;
TYPE 'B'	3 FT.	1'-4"	1'-6"	1'-10"	WHERE FILL HEIGHTS ARE UNDER 10 FT.;
TYPE 'C'	4 FT.	2'-2"	1'-6"	3'-0"	& AT BRIDGE END ROLLS, DITCH CHECKS, & AT GRADES OVER 8% AT 25 FT. SPACING.

(SEE SHEET 2 OF 2 FOR ADDITIONAL APPLICATIONS.)

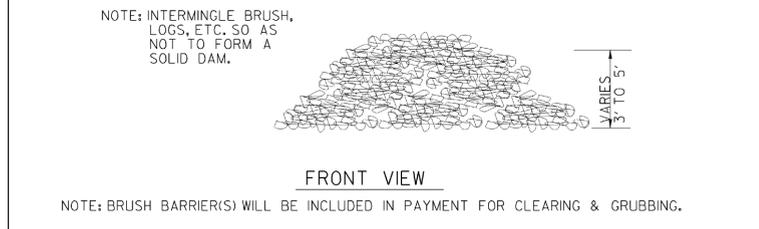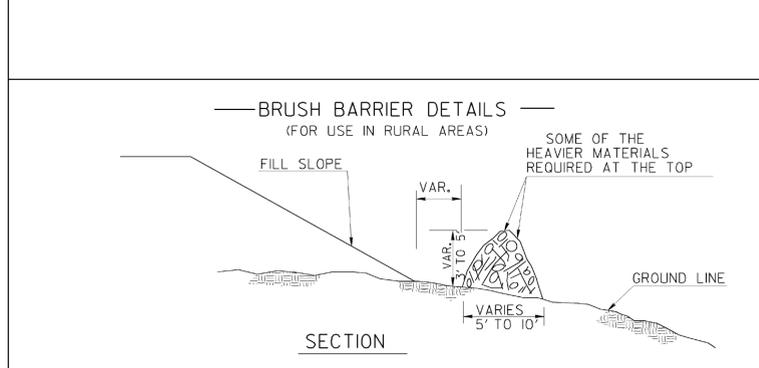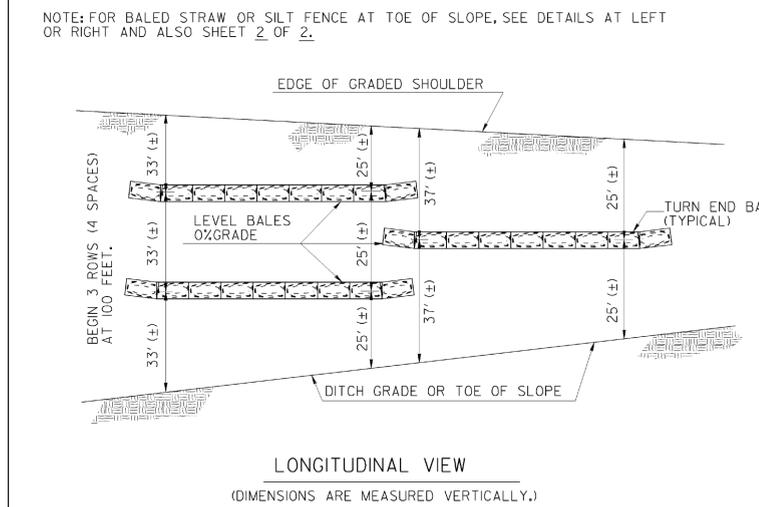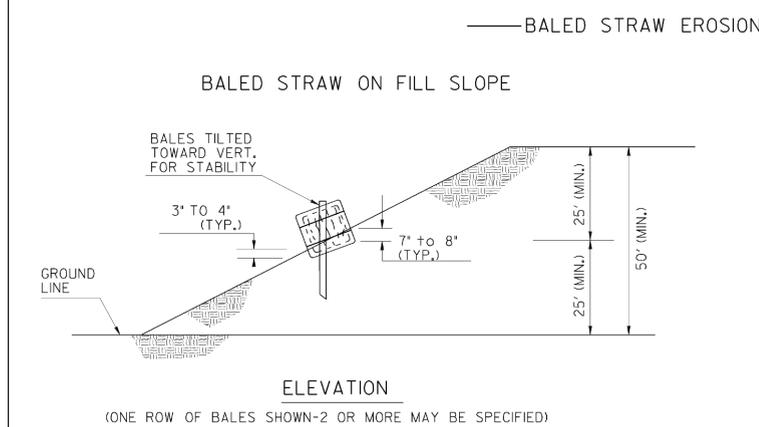

NOTE: INTERMINGLE BRUSH, LOGS, ETC. SO AS NOT TO FORM A SOLID DAM.

NOTE: BRUSH BARRIER(S) WILL BE INCLUDED IN PAYMENT FOR CLEARING & GRUBBING.

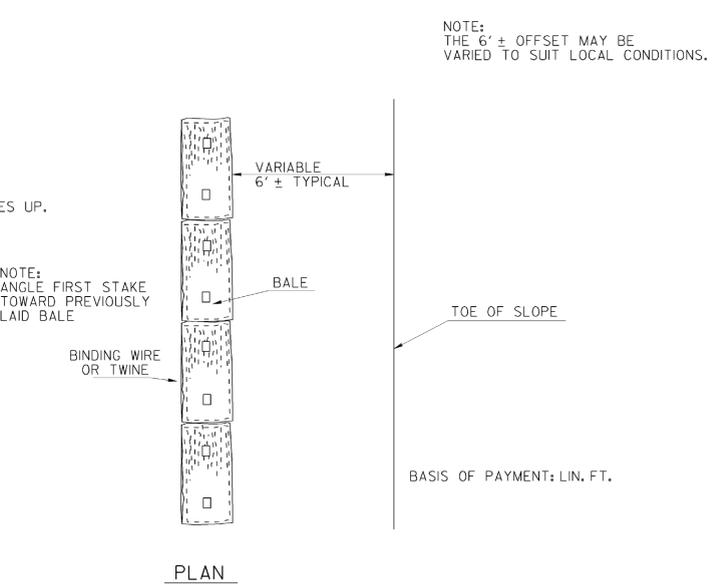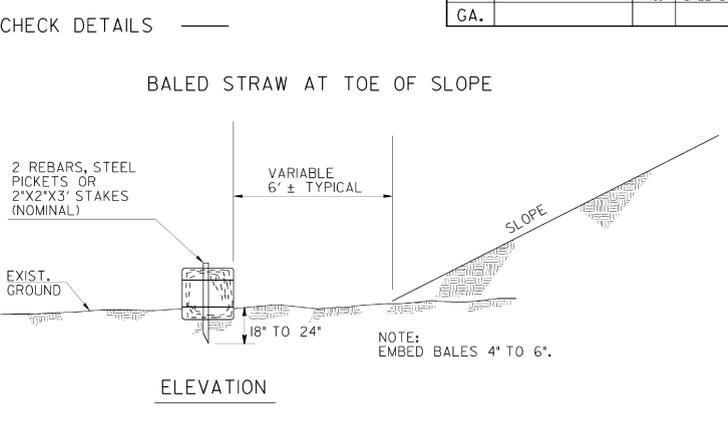

NOTE: THE 6' ± OFFSET MAY BE VARIED TO SUIT LOCAL CONDITIONS.

NOTE: ANGLE FIRST STAKE TOWARD PREVIOUSLY LAID BALE

NOTE: BALED STRAW IS USED IN TYPICAL RURAL AREAS WHERE FILLS ARE FROM 5 FT. TO 10 FT. HIGH, FOR DITCH CHECKS, AND AS SPECIFIED ELSEWHERE. (See Sh. 2 of 2)

SYNTHETIC HAY BALES OF TYPE WHICH HAVE BEEN CLASSIFIED AS 'ACCEPTED' BY THE D.O.T. OFFICE OF MATERIALS & RESEARCH MAY BE USED AS AN ALTERNATE TO BALED STRAW AS APPROVED BY THE ENGINEER.

REV.	REDR.	REVISION	DATE	BY
			9-01	

TEMPORARY SILT FENCE
BALED STRAW EROSION CHECK
BRUSH BARRIER DETAILS

(SHEET 1 OF 2)

REVISION DATES