

PROPOSED PLANT SYMBOL KEY

DECIDUOUS TREES

- AB-TRIDENT MAPLE
- AR-OCTOBER GLORY MAPLE
- CC-AMERICAN HORNBEAM
- LT-TULIP POPLAR
- QA-WHITE OAK
- QC-SAWTOOTH OAK
- QF-SOUTHERN RED OAK
- UP-ALLEE ELM

EVERGREEN TREES

- IL-SAVANNAH HOLLY
 - JV-EASTERN RED CEDAR
 - MG-BRACKEN'S BROWN BEAUTY MAGNOLIA
 - PT-LOBLOLLY PINE
 - PV-VIRGINIA PINE
- SHRUBS**
- IV-VIRGINIA SWEETSPIRE
 - HQ-HYDRANGEA QUERCIFOLIA


PLANT LIST					
KEY	QTY.	BOTANICAL NAME	COMMON NAME	SPECIFICATIONS	SIZE
TREES					
AB	7	ACER BUERGERIANUM	TRIDENT MAPLE	B&B SPECIMEN, SINGLE CENTRAL LEADER, FULL HEAD, STRAIGHT TRUNK	3" CAL.
AR	10	ACER RUBRUM 'OCTOBER GLORY'	OCTOBER GLORY MAPLE	B&B SPECIMEN, SINGLE CENTRAL LEADER, FULL HEAD, STRAIGHT TRUNK	3" CAL.
CC	10	CARPINUS CAROLINIANA	AMERICAN HORNBEAM	B&B SPECIMEN, SINGLE CENTRAL LEADER, FULL HEAD, STRAIGHT TRUNK	3" CAL.
IL	6	ILEX ATTENUATA 'SAVANNAH'	SAVANNAH HOLLY	SPECIMEN, FULL HEAD, FULL TO GROUND	3" CAL.
JV	11	JUNIPERUS VIRGINIANA	EASTERN RED CEDAR	SPECIMEN, FULL HEAD, FULL TO GROUND	3" CAL.
LT	4	LIRIODENDRON TULIPIFERA	TULIP POPLAR	B&B SPECIMEN, SINGLE CENTRAL LEADER, FULL HEAD, STRAIGHT TRUNK	3" CAL.
MG	6	MAGNOLIA GRANDIFLORA 'BRACKEN'S BROWN BEAUTY'	BRACKEN'S BROWN BEAUTY MAGNOLIA	SPECIMEN, FULL HEAD, FULL TO GROUND	3" CAL.
PT	8	PINUS TAEDA	LOBLOLLY PINE	FULL HEAD, STRAIGHT TRUNK	3" CAL.
PV	8	PINUS VIRGINIANA	VIRGINIA PINE	FULL HEAD, STRAIGHT TRUNK	3" CAL.
QA	5	QUERCUS ALBA	WHITE OAK	B&B SPECIMEN, SINGLE CENTRAL LEADER, FULL HEAD, STRAIGHT TRUNK	3" CAL.
QC	4	QUERCUS SCUTISSIMA	SAWTOOTH OAK	B&B SPECIMEN, SINGLE CENTRAL LEADER, FULL HEAD, STRAIGHT TRUNK	3" CAL.
QF	4	QUERCUS FALCATA	SOUTHERN RED OAK	B&B SPECIMEN, SINGLE CENTRAL LEADER, FULL HEAD, STRAIGHT TRUNK	3" CAL.
UP	6	ULMUS PARVIFOLIA 'EMER F'	ALLEE ELM	B&B SPECIMEN, SINGLE CENTRAL LEADER, FULL HEAD, STRAIGHT TRUNK	3" CAL.
SHRUBS					
HQ	7	HYDRANGEA QUERCIFOLIA	OAKLEAF HYDRANGEA	SPECIMEN, FULL HEAD, FULL TO GROUND	7 GAL.
IV	7	ITEA VIRGINICA	VIRGINIA SWEETSPIRE	SPECIMEN, FULL HEAD, FULL TO GROUND	7 GAL.

GENERAL PLANT NOTES:


1. ALL PLANTS MUST BE HEALTHY, VIGOROUS MATERIAL, FREE OF PESTS AND DISEASES.
2. ALL PLANTS MUST BE CONTAINER-GROWN OR BALLED AND BURLAPPED (B&B) OR OTHERWISE AS INDICATED IN THE PLANT LIST.
3. ALL TREES MUST BE STRAIGHT TRUNKED, FULL-HEADED, AND MEET ALL REQUIREMENTS SPECIFIED.
4. ALL PLANTS ARE SUBJECT TO THE APPROVAL OF THE LANDSCAPE ARCHITECT AND / OR THE OWNER BEFORE, DURING, AND AFTER INSTALLATION UNTIL THE DATE OF FINAL ACCEPTANCE.
5. ALL PLANTS AND PLANTING AREAS MUST BE COMPLETELY MULCHED AS PER SPECIFICATIONS.
6. PRIOR TO CONSTRUCTION, THE LANDSCAPE CONTRACTOR SHALL BE RESPONSIBLE FOR LOCATING ALL UNDERGROUND UTILITIES AND SHALL AVOID DAMAGE TO ALL UTILITIES DURING THE COURSE OF THE WORK. THE LANDSCAPE CONTRACTOR IS RESPONSIBLE FOR REPAIRING ANY AND ALL DAMAGE TO UTILITIES, STRUCTURES, SITE APPURTENANCES, ETC. WHICH OCCURS AS A RESULT OF THE LANDSCAPE CONSTRUCTION.
7. THE LANDSCAPE CONTRACTOR IS RESPONSIBLE FOR VERIFYING ALL QUANTITIES SHOWN ON THESE PLANS BEFORE PRICING THE WORK.
8. THE LANDSCAPE CONTRACTOR IS RESPONSIBLE FOR MAINTAINING ALL PLANTING UNTIL FINAL ACCEPTANCE PER SPECIFICATION 702.3.06 QUALITY ACCEPTANCE.
9. AFTER BEING DUG AT THE NURSERY SOURCE, ALL TREES IN LEAF SHALL BE ACCLIMATED FOR TWO (2) WEEKS UNDER A MIST SYSTEM PRIOR TO INSTALLATION.
10. ANY PLANT MATERIAL WHICH DIES, TURNS BROWN, OR DEFLOLIATES (PRIOR TO FINAL ACCEPTANCE OF THE WORK) SHALL BE PROMPTLY REMOVED FROM THE SITE AND REPLACED WITH MATERIAL OF THE SAME SPECIES, QUANTITY, SIZE, AND MEETING ALL PLANT LIST SPECIFICATIONS.
11. STANDARDS SET FORTH IN 'AMERICAN STANDARDS FOR NURSERY STOCK' REPRESENT GUIDELINES SPECIFICATION ONLY AND CONSTITUTE MINIMUM QUALITY REQUIREMENTS FOR PLANT MATERIAL.
12. ALL SOD AND SEED TO BE AS SPECIFIED. TEMPORARY GRASS TO BE COMBINATION OF ANNUAL RYE AND FESCUE SEED. REFER TO SPECIFICATIONS FOR INSTALLATION INFORMATION.
13. PLANT SYMBOLS IN THE LANDSCAPE PLAN SUPERCEDE QUANTITIES SHOWN IN THE PLANT LIST.
14. IN DETERMINING SIZE-GRADING FOR B&B TREES, CALIPER SHALL TAKE PRECEDENCE OVER HEIGHT.
15. IN DETERMINING SIZE-GRADING FOR MULTI-STEM TREES, HEIGHT SHALL TAKE PRECEDENCE OVER CAMPIER.

TREE LEGEND		
489 SWEETGUM 32"	688 OAK 25"	1130 PINE 24"
490 OAK 42"	689 OAK 26"	1131 OAK 34"
491 OAK 48"	706 OAK 39"	1132 POPLAR 37"
538 OAK 30"	776 PINE 24"	1133 POPLAR 49"
539 OAK 42"	805 MAPLE 8.5"	1134 PINE 19"
540 OAK 35"	807 TRIPLE PEACH 5"5"5"	1160 POPLAR 16"
554 OAK 43"	808 OAK 22"	1179 OAK 28"
583 ELM 13"	809 ELM 14.5"	1180 OAK 30"
592 POPLAR 30"	828 OAK 39"	1181 OAK 30"
593 OAK 29"	829 OAK 29"	1182 OAK 35"
594 PINE 22"	830 PINE 23"	1320 OAK 26"
595 OAK 28"	832 OAK 39"	1321 OAK 30"
602 PINE 23"	1062 PINE 7"	1322 OAK 28"
651 PINE 21"	1063 POPLAR 18"	1323 OAK 30"
672 OAK 42"	1064 PINE 7"	1324 OAK 25"
678 OAK 36"	1065 OAK 11.5"	L001 SWEETGUM 10"
679 OAK 33"	1066 PINE 7.5"	L002 PINE 6"
680 OAK 30"	1067 OAK 12"	L003 POPLAR 11"
681 OAK 24"	1068 PINE 6"	L004 POPLAR 10"
682 OAK 34"	1069 OAK 32"	L005 2 TRUNK RIVER BIRCH 6"
683 OAK 32"	1070 OAK 30"	L006 HACKBERRY 12"
684 OAK 38"	1128 PINE 20"	L007 MULBERRY MULTI-TRUNK 10"
685 OAK 42"	1129 SOURWOOD 6"	L008 OAK 10"
687 OAK 37"		


*** PLEASE REFER TO SHEETS 29-009 - 29-010 FOR TREE REPLACEMENT INFORMATION ***

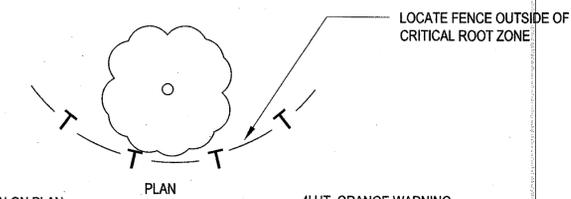

NOTE:
PROVIDE FENCE AS SHOWN ON PLAN.
PROVIDE AT LEAST ONE FOOT OF DISTANCE FROM TREE TO FENCE, FOR EACH INCH OF TREE DBH.

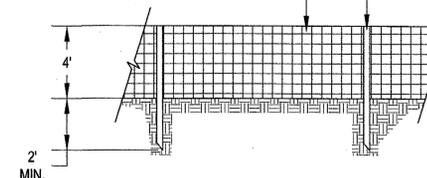

1
29-012
NTS
ORANGE BARRIER FENCE

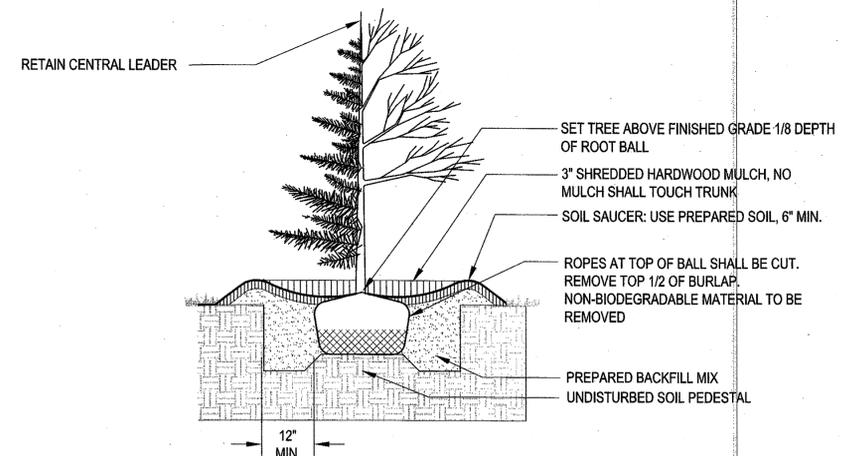

2
29-012
NTS
EVERGREEN TREE/TREE PLANTING DETAIL



POND
834 Inman Village Parkway, Suite 100
Atlanta, Georgia 30307
(V) 404-221-1900 (F) 404-215-9111

Copyright © 2011 by Pond & Company. All rights reserved.
No copying or duplication of these documents is allowed without the express written agreement of Pond & Company

REVISION DATES	

STATE OF GEORGIA
DEPARTMENT OF TRANSPORTATION
OFFICE: TRAFFIC SAFETY & DESIGN
LANDSCAPE PLAN

NORTHSIDE DRIVE SAFETY IMPROVEMENTS

29-020