



Figure 6-10.2


L = The distance such that points A and B are of equal elevation

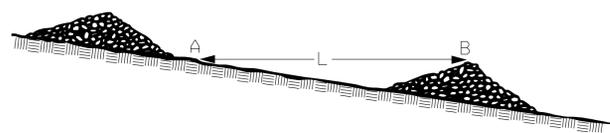

SPACING BETWEEN CHECK DAMS

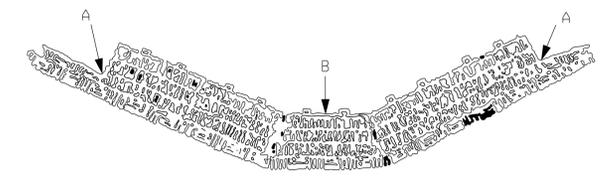


PROPER PLACEMENT OF STRAW BALE BARRIER IN DRAINAGE WAY

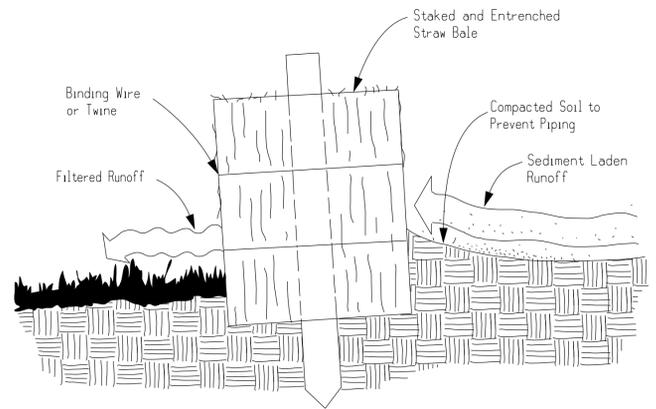


Note: Embed hay bales a minimum of 4 inches.

CROSS-SECTION OF A PROPERLY INSTALLED STRAW BALE

Cd CHECKDAM

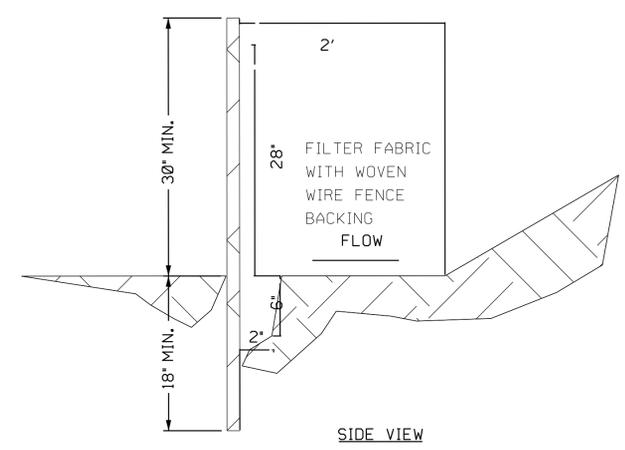


SIDE VIEW

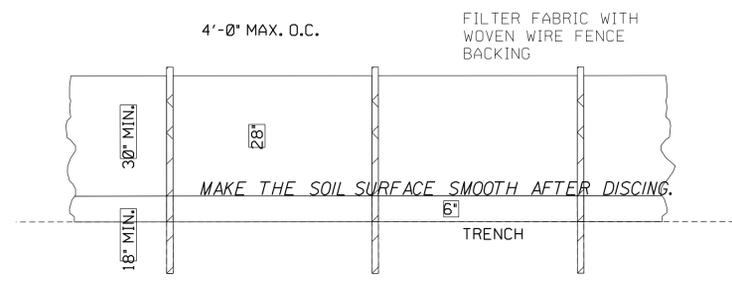

FRONT VIEW


NOTE:
USE 36" D.O.T. APPROVED FABRIC.
USE STEEL POSTS - ONLY.

Sdl SILT FENCE

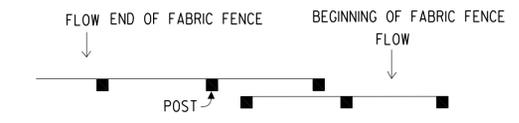


TOP VIEW - (NOT TO SCALE)

OVERLAP AT FABRIC ENDS

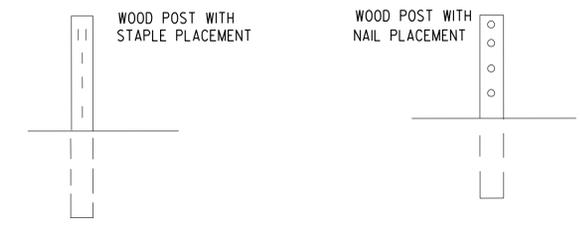

FRONT VIEWS

FASTENERS FOR SILT FENCE

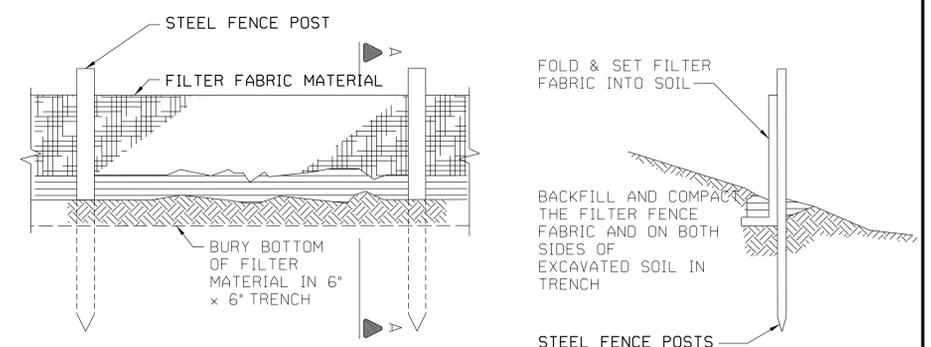

SECTION A-A

NOTE:
1. FABRIC SHALL RETAIN 85% OF SOIL, BASED ON SIEVE ANALYSIS, BUT NOT FINER THAN OPENING SIZE 70.
2. SILT FENCE MATERIAL WILL MEET GDOT SPECIFICATIONS.

PREPARED BY:
Level II Certification #: 0000017138

STATE OF GEORGIA
DEPARTMENT OF TRANSPORTATION

OFFICE:
ESPC GENERAL NOTES

INTERSECTION IMPROVEMENTS
LAVISTA ROD. AT OAK GROVE RD.

DRAWING No.
51-05

POND
Architects-Engineers-Planners
3500 Parkway Lane
Suite 600 •
Norcross, Ga. 30092
Phone 678-336-7740
Fax 678-336-7744
Web www.pondco.com

REVISION DATES	
10/09/13	