


**TYPICAL SECTION # 3
PROPOSED JIMMY DELOACH CONNECTOR**

APPROACHING BRIDGE OVER S.R. 21
AT JIMMY DELOACH PARKWAY

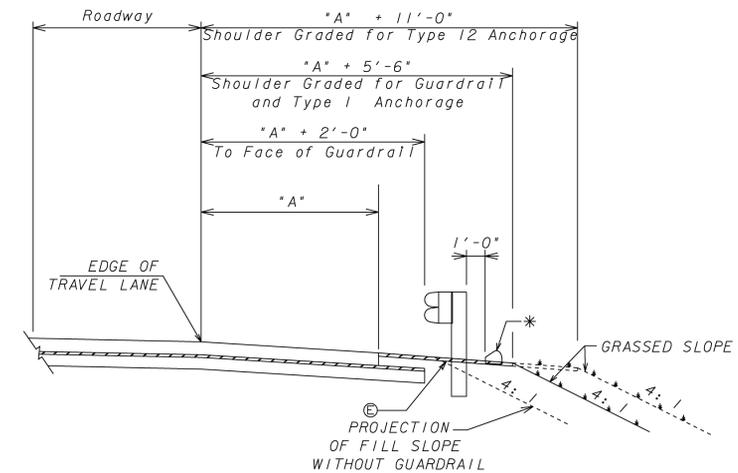

**TYPICAL SHOULDER DETAIL AT
CONCRETE SECTION FOR GUARDRAIL**

SEE PLANS FOR LOCATIONS

SEE GA STD 4052 FOR DETAILS

* ASPHALTIC CONCRETE CURB PER SECTION 436 SHALL BE REQUIRED WHERE SPECIFIED.
TYPICAL USE IS FOR EROSION PREVENTION OF HIGH FILL SLOPES WHERE SPILLWAYS
ARE REQUIRED. SEE PLAN FOR SPILLWAY LOCATIONS.

REQUIRED PAVEMENT

- (A) PLAIN PORTLAND CEMENT CONCRETE PVMT, CL 1 CONC, 12 INCH THK
- (B) RECYCLED ASPH CONC 19 MM SUPERPAVE, GP 1 OR 2, INCL BITUM MATL & H LIME (330 LBS/SY)
- (C) GR AGGR BASE CRS, 12" INCL MATL
- (E) RECYCLED ASPH CONC 19 MM SUPERPAVE, GP 1 OR 2, INCL BITUM MATL (220 LBS/SY)

NOTE

- ① SEE ROADWAY PLANS FOR SUPERELEVATION RATES & TRANSITIONS.



**COSTING PLANS
FOR DESIGN-BUILD**

NOT TO SCALE

REVISION DATES

STATE OF GEORGIA
DEPARTMENT OF TRANSPORTATION
OFFICE: INNOVATIVE PROGRAM DELIVERY
**TYPICAL SECTIONS
JIMMY DELOACH CONNECTOR**

DRAWING No.
5-03