


NOTES:

1. SET TREES STRAIGHT AND PLUMB
2. PLANT SO THAT TOP OF ROOT BALL IS THE SAME GRADE AS AT THE NURSERY
3. AFTER PLACEMENT AND ROTATION OF TREE REMOVE ALL ROPES FROM ROOT BALL AND CUT AND REMOVE TOP 1/4 OF BURLAP AND TOP 1/4 OF WIRES. COMPLETELY REMOVE BURLAP IF IT IS MADE OF SYNTHETIC MATERIAL.
4. STRAPS SHALL HAVE ENOUGH SLACK TO ALLOW MOVEMENT OF THE TRUNK AND TOP, BUT NOT ENOUGH TO ALLOW THE ROOTBALL TO SHIFT.


X TYPICAL EVERGREEN TREE PLANTING DETAIL
 SCALE: N.T.S.

NOTES:

1. PLANTING SOIL MIX IN INDIVIDUAL PLANTING HOLES OR CONTINUOUS BEDS.
2. AFTER PLACEMENT AND ROTATION OF SHRUB REMOVE ALL ROPES FROM ROOT BALL AND CUT AND REMOVE TOP OF BURLAP. COMPLETELY REMOVE BURLAP IF IT IS MADE OF SYNTHETIC MATERIAL.
3. DELETE SOIL SAUCER AROUND EACH SHRUB IF CONTINUOUS BED. PROVIDE NEAT TRIMMED SOIL EDGE AT CONTINUOUS BEDS AGAINST LAWN.
4. PRUNE BROKEN CANES AFTER PLANTING

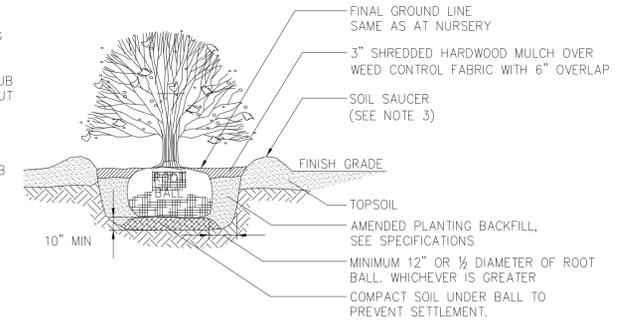

X TYPICAL SHRUB PLANTING DETAIL
 SCALE: N.T.S.

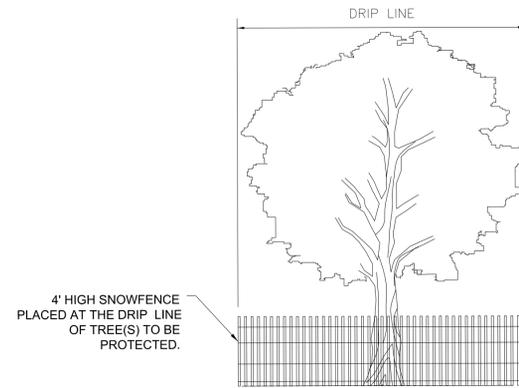

X EXISTING TREE PROTECTION
 NOT TO SCALE

TREE PROTECTION NOTES:

1. TREE PROTECTION SHALL BE PROVIDED FOR ANY AND ALL TREES TO BE PRESERVED DURING AND AFTER CONSTRUCTION. THE CONTRACTOR SHALL TAKE WHATEVER ADDITIONAL MEASURES NECESSARY TO PROTECT EXISTING TREES TO REMAIN AGAINST UNNECESSARY CUTTING, BREAKING OR SKINNING OF ROOTS, SKINNING AND BRUISING OF BARK, SMOTHERING OF TREES BY STOCKPILING CONSTRUCTION MATERIALS OR EXCAVATED MATERIAL WITHIN DRIP LINE, EXCESS FOOT OR VEHICULAR TRAFFIC, OR PARKING OF VEHICLES WITHIN DRIP LINE.
2. FOUR (4) FOOT HIGH SNOW FENCE SHALL BE PLACED AT DRIP LINE OF THE INDIVIDUAL TREE TO BE PRESERVED AND SHALL ENCIrcLE THE ENTIRE TREE. WHERE TREES ARE IN CLOSE PROXIMITY TO EACH OTHER, ONE FENCE SHALL ENCOMPASS THE COLLECTIVE TREES.
3. BOARDS OR FENCING SHALL NOT BE NAILED TO TREES DURING CONSTRUCTION.
4. DAMAGED TRUNKS OR EXPOSED ROOTS SHOULD HAVE DAMAGED BARK REMOVED IMMEDIATELY AND NO PAINT SHALL BE APPLIED. EXPOSED ROOTS SHOULD BE COVERED WITH TOPSOIL IMMEDIATELY AFTER EXCAVATION IS COMPLETE. ROOTS SHALL BE PRUNED TO GIVE A CLEAN, SHARP SURFACE AMENABLE TO HEALING. ROOTS EXPOSED DURING HOT WEATHER SHOULD BE IRRIGATED TO PREVENT PERMANENT TREE INJURY. CARE FOR SERIOUS INJURY SHOULD BE PRESCRIBED BY A PROFESSIONAL FORESTER OR LICENSED TREE EXPERT.
5. TREE LIMB REMOVAL, WHERE NECESSARY, WILL BE DONE AS NATURAL TARGET PRUNING TO REMOVE THE DESIRED BRANCH AS CLOSE AS POSSIBLE TO THE BRANCH COLLAR. THERE SHOULD BE NO FLUSH CUTS: FLUSH CUTS DESTROY A MAJOR DEFENSE SYSTEM OF THE TREE. NO TREE PAINT SHALL BE APPLIED. ALL CUTS SHALL BE MADE AT THE OUTSIDE EDGE OF THE BRANCH COLLAR. CUTS MADE TOO FAR BEYOND THE BRANCH COLLAR MAY LEAD TO EXCESS SPROUTING, CRACKS AND ROT. REMOVAL OF A "V" CROTCH SHOULD BE CONSIDERED FOR FREE STANDING SPECIMEN TREES TO AVOID FUTURE SPLITTING DAMAGE.
6. TREES WITHIN THE LIMITS OF THE CONTRACT WORK SHALL BE WATERED AS REQUIRED TO MAINTAIN THEIR HEALTH.
7. FEEDER ROOTS SHOULD NOT BE CUT IN AN AREA INSIDE THE PROTECTED ROOT ZONE (PRZ). UTILITIES SHALL BE TUNNELED UNDER TREES TO PREVENT CUTTING OF IMPORTANT FEEDER ROOTS.

REVISION DATES

12/11/2015		