



HEAD FRAME & LUMINAIRE RING

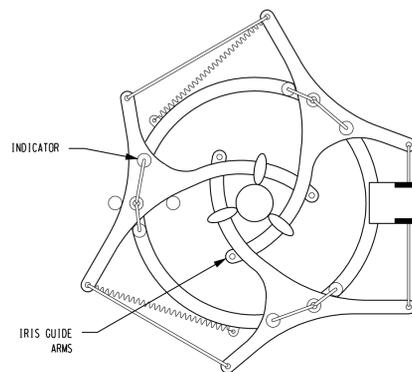


TOP VIEW MOUNTING RING


- GENERAL NOTES**
1. ALL TOWERS SHALL BE EQUIPPED WITH LUMINAIRE RAISE-LOWER DEVICE.
 2. THE HIGH MAST LUMINAIRE SUPPORT AND LOWERING ASSEMBLY SHALL BE IN ACCORDANCE WITH SECTION 920.2.05 OF THE GEORGIA DOT STANDARDS SPECIFICATIONS, CONSTRUCTION OF TRANSPORTATION SYSTEM 2001 EDITION.
 3. ALL HIGH MAST LUMINAIRE SUPPORT AND LOWERING ASSEMBLIES SHALL BE THE LATCHING DEVICE DESIGN. THE LATCHING DEVICE SHALL BE THE TOP LATCH DESIGN.
 4. THE WINCH ASSEMBLY SHALL INCLUDE A CABLE GUARD RETAINER FOR THE WINCH DRUM.
 5. EACH LIGHTING TOWER SHALL BE GROUNDED TO A GROUND ROD AT THE TOWER AND TO THE SYSTEM GROUNDING CONDUCTOR.

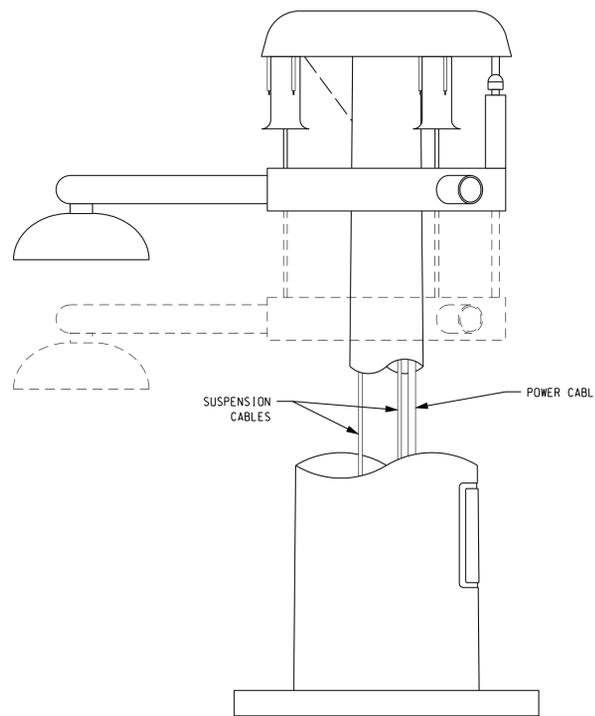

RAISE-LOWER DEVICE MOUNTED ON POLE

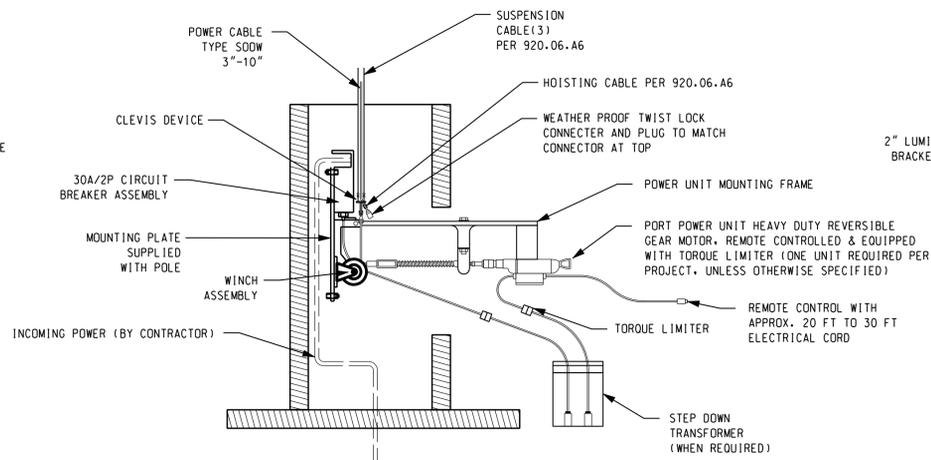

POLE BASE DETAIL

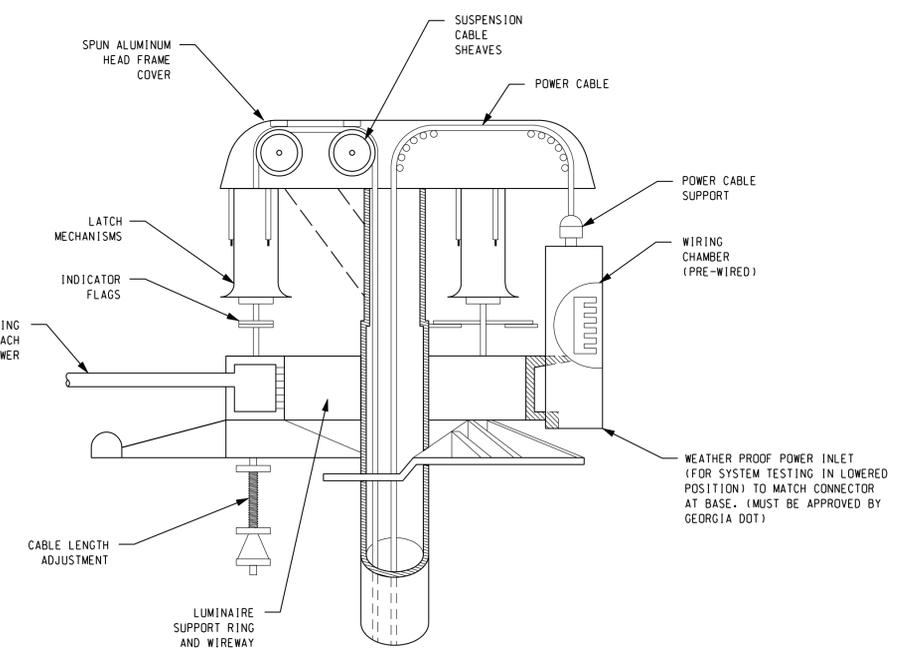

SECTION "A-A"

SIDE VIEW

Released for Construction 03-09-2012



GRESHAM SMITH AND PARTNERS



NOT TO SCALE

REVISION DATES	

STATE OF GEORGIA
 DEPARTMENT OF TRANSPORTATION
 OFFICE: CONSULTANT DESIGN
LIGHTING DETAILS
LOWERING DEVICE
 P. I. No. 0010210
 1-20 @ WASHINGTON ROAD
 DRAWING No. 25-011