
S'	ТАТЕ	PROJECT NUMBER	SHEET NO.	TOTAL SHEETS
	GA.	CSMSL-ØØØ6-ØØ(478)	29	43

CCTV/VDS ASSEMBLY AND TYPICAL ERECTION DETAILS

-NOT TO SCALE--FOR INFORMATION ONLY-

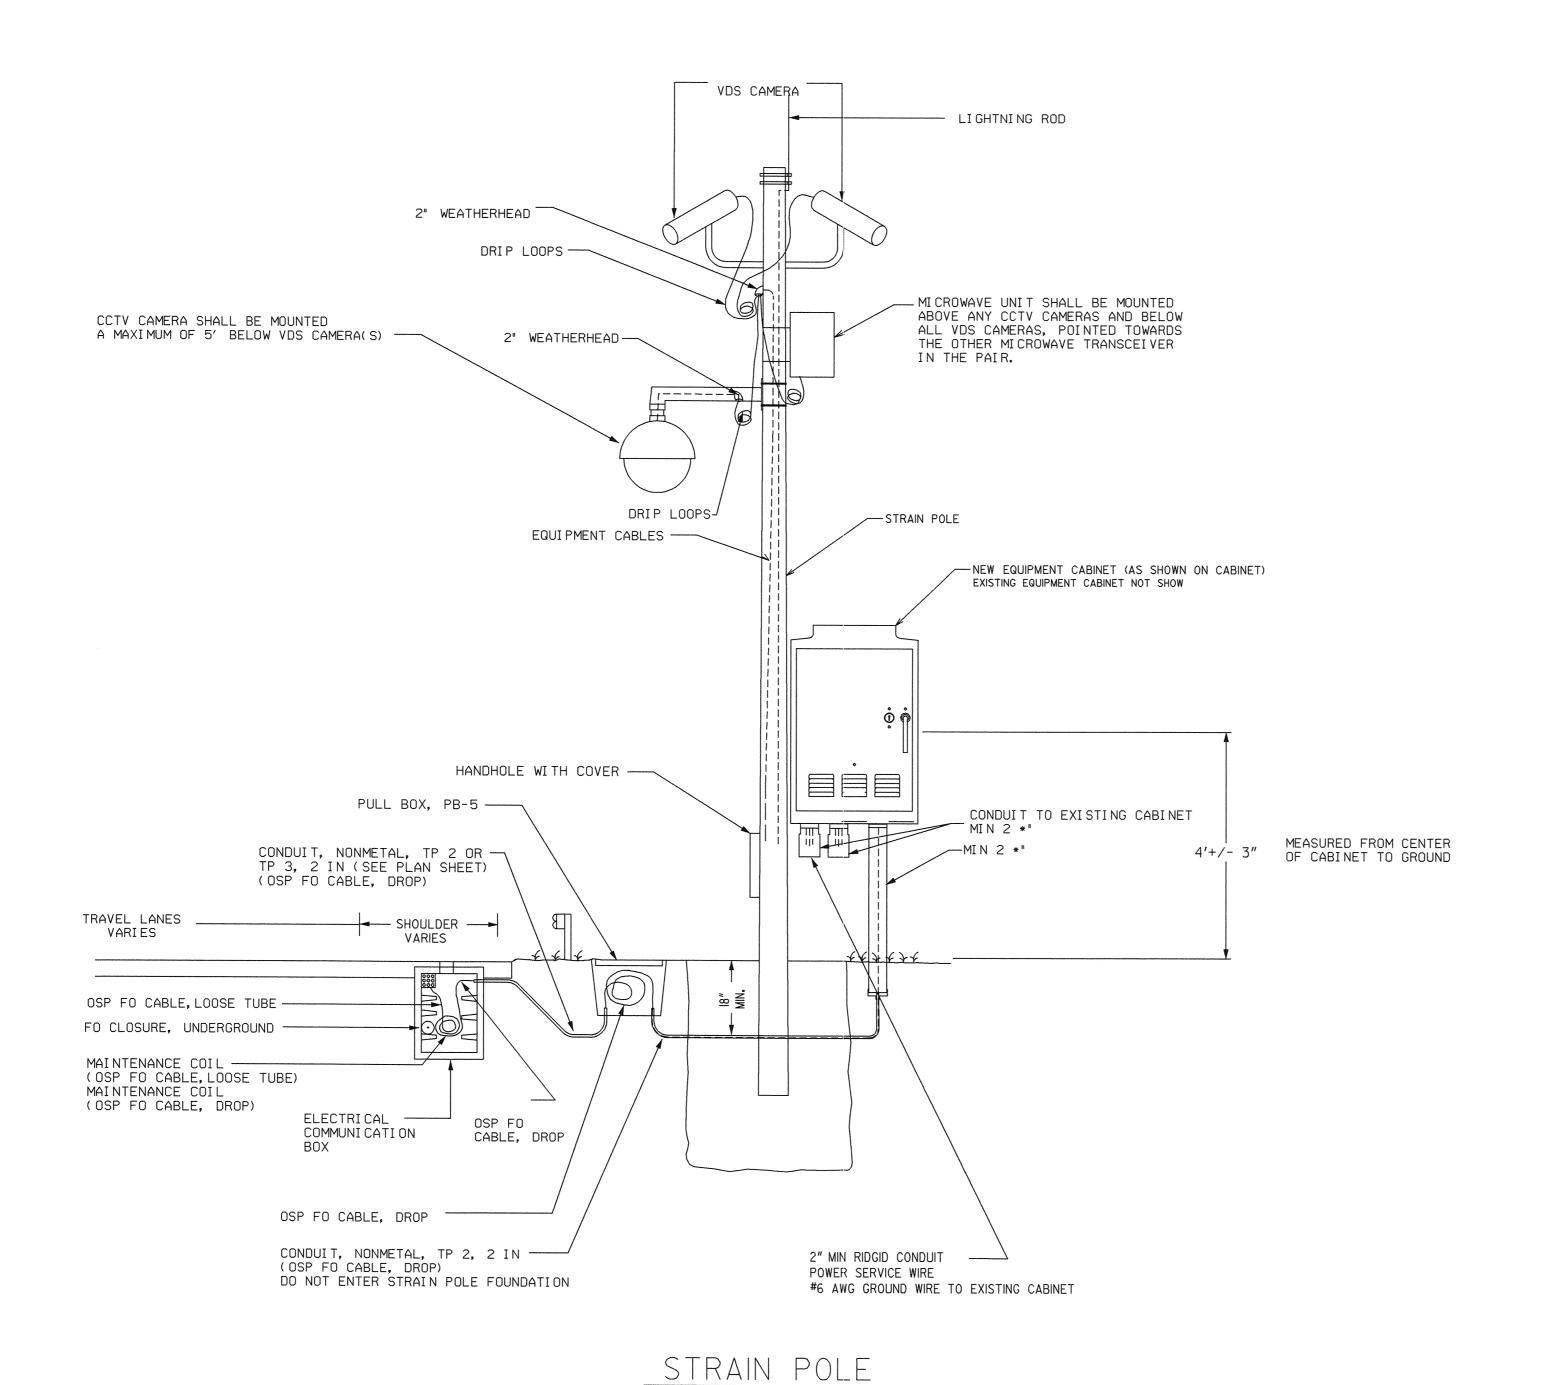

(ELEVATION VIEW)

GENERAL NOTES

1. THE CONTRACTOR SHALL FURNISH AND INSTALL ALL CCTV EQUIPMENT AND MATERIALS IN ACCORDANCE WITH THE CONTRACT PLANS AND SECTION 936 OF THE STANDARD SPECIFICATIONS.

2. ALL CABLE ENTRANCES IN OR OUT OF POLE SHALL BE BY A WEATHERHEAD OR RIGID METALLIC CONDUIT BODY WITH A THREADED NIPPLE INSTALLED IN A THREADED COLLAR. FIELD DRILLING SHALL NOT BE PERMITTED.

3. DETAIL IS FOR INFORMATION ONLY. CONTRACTOR SHALL SUBMIT ATTACHMENT SKETCH TO ENGINEER FOR APPROVAL PRIOR TO BEGINNING INSTALLATION

4. INSTALL ALL REQUIRED CABLES TO DEVICES IN EXISTING CONDUIT INSIDE POLE BY PASSING THROUGH EXISTING CABINET AND EXITING A WEATHERHEAD.

STATE OF GEORGIA DEPARTMENT OF TRANSPORTATION OFFICE OF TRAFFIC OPERATIONS

ITS - CMS & SURVEILLANCE ENHANCEMENTS TO EXISTING SYS