STATE	PROJECT NUMBER	SHEET NO.	TOTAL SHEETS
GA.		351	355

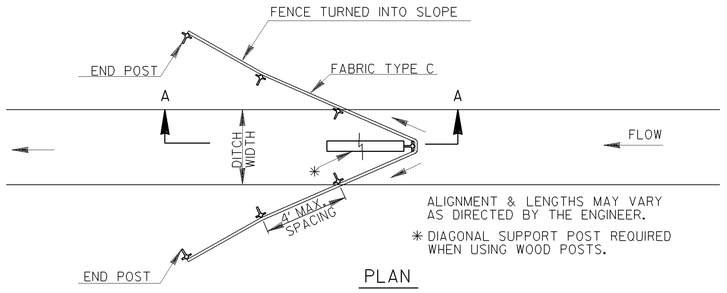

PLAN

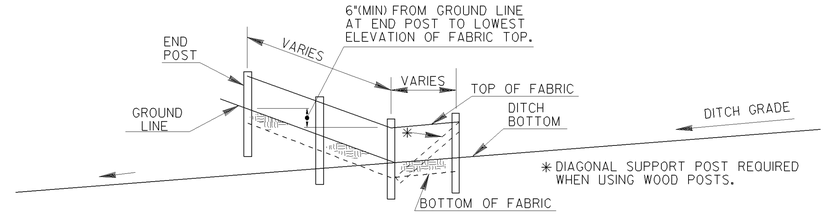

SECTION A-A

FABRIC CHECK DAM

DITCH WITH SIDE SLOPES 6:1 OR GREATER AND DEPTHS OVER 36"

TYPICAL FABRIC CHECK DAM SPACING	
GRADE OF DITCH	MINIMUM SPACING (FEET)
LESS THAN 1%	100' ±
1% TO 2%	100' ±
2% TO 3%	50' ±
3% TO 4%	50' ±
4% TO 5%	25' ±
4% TO <8%	25' ±

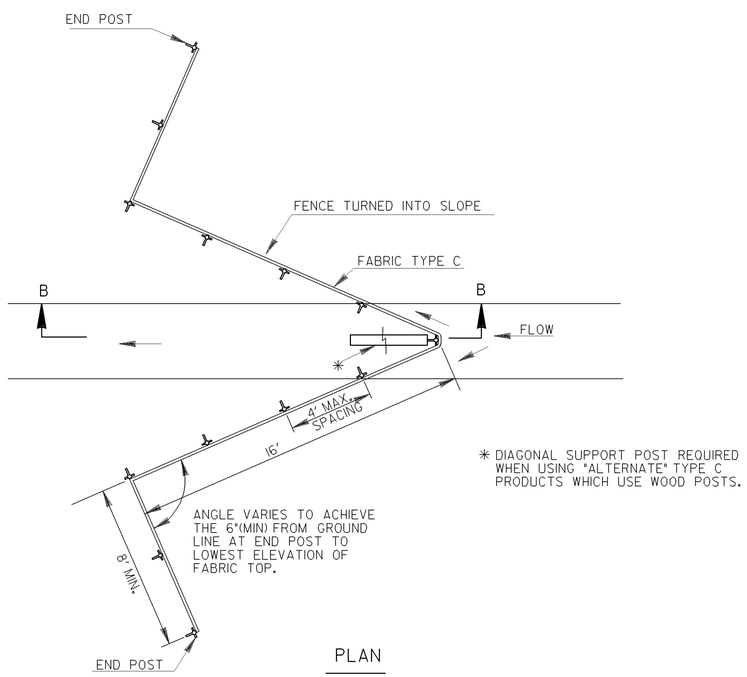

PLAN

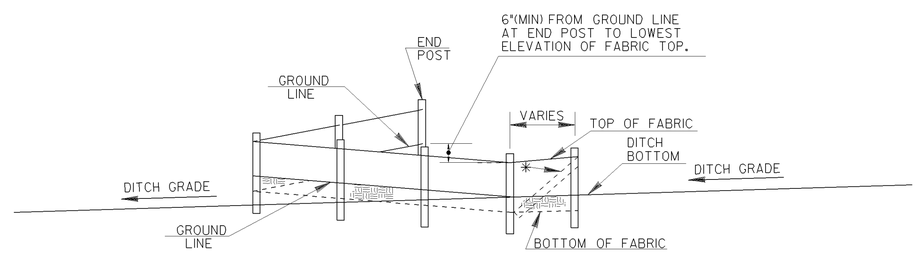

SECTION B-B

FABRIC CHECK DAM

DITCH WITH SIDE SLOPES FLATTER THAN 6:1 (ALL MEDIANS) OR DEPTHS LESS THAN 36"

NOTE:

1. THE MAXIMUM DRAINAGE AREA FOR FABRIC CHECK DAMS SHALL BE 1 ACRE.
2. TEMPORARY SILT FENCE SHALL NOT BE PLACED WITHIN STATE WATERS.

DATE	DEPARTMENT OF TRANSPORTATION STATE OF GEORGIA		
REVISION	CONSTRUCTION DETAILS TEMPORARY SILT FENCE FABRIC CHECK DAM		
	NO SCALE	JANUARY 2011	
BY			NUMBER D-24D (SHEET 4 OF 4)