



Know what's below.  
Call before you dig.

# GENERAL NOTES

**USE ON CONSTRUCTION**


STATE	PROJECT NUMBER	SHEET NO.	TOTAL SHEETS
GA.	STP00-0076-01(028)	5	227

NOTES:

- ALL STANDARD HIGHWAY SIGNS SHALL BE FABRICATED AND ERECTED IN ACCORDANCE WITH THE DETAILS SHOWN IN THE PLANS, THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES, CURRENT EDITION, AND THE GEORGIA SPECIFICATIONS, SUPPLEMENTAL SPECIFICATIONS, AND/OR SPECIAL PROVISIONS.
- SIGN ERECTION STATIONS ARE APPROXIMATE AND MAY BE ADJUSTED TO MEET FIELD CONDITIONS WHERE NECESSARY, BUT SHALL BE WITHIN THE LIMITATIONS SET FORTH IN THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES, CURRENT EDITION. NO SIGN LOCATION SHALL BE CHANGED BY THE CONTRACTOR OR BY THE PROJECT ENGINEER WITHOUT PRIOR APPROVAL FROM THE OFFICE OF TRAFFIC SAFETY AND DESIGN.
- ALL STANDARD HIGHWAY SIGNS SHALL BE ERECTED AT A HEIGHT OF 7 FEET ABOVE THE NORMAL EDGE OF PAVEMENT TO THE BOTTOM OF THE SIGN OR ASSEMBLY.
- HORIZONTAL CLEARANCE FOR STANDARD HIGHWAY SIGNS ON INTERSTATE HIGHWAYS SHALL BE 32 FEET FROM THE NORMAL EDGE OF PAVEMENT TO THE NEARER EDGE OF THE SIGN(S). UNLESS SPECIFIED OTHERWISE IN THE PLANS. HORIZONTAL CLEARANCE FOR STANDARD HIGHWAY SIGNS ON RAMP SHALL BE 2 FEET FROM THE NORMAL EDGE OF PAVED SHOULDER, OR EDGE OF GRADED SHOULDER WHEN PRESENT.
- HORIZONTAL CLEARANCE FOR STANDARD HIGHWAY SIGNS ON ALL OTHER ROADWAYS SHALL BE 6 FEET FROM THE EDGE OF THE PAVED SHOULDER OR 12 FEET FROM THE NORMAL EDGE OF PAVEMENT TO THE NEARER EDGE OF THE SIGN(S), WHICHEVER IS GREATER. THE HORIZONTAL CLEARANCE IN NON-MOUNTABLE CURB SECTIONS SHALL BE AT LEAST 2 FEET FROM THE CURB FACE TO THE NEARER EDGE OF THE SIGN(S).
- HORIZONTAL CLEARANCE FOR STANDARD HIGHWAY SIGNS MOUNTED BEHIND GUARD RAIL SHALL BE 6 FEET FROM THE FACE OF THE GUARD RAIL TO THE NEARER EDGE OF THE SIGN(S).
- SINGLE PLATE, HORIZONTAL RECTANGULAR SIGNS OVER 48 INCHES IN WIDTH SHALL BE MOUNTED ON TWO POSTS WITH 2 EACH 2 INCH x 1/2 INCH x (WIDTH OF SIGN) ALUMINUM OR GALVANIZED STEEL STRAPS. THE STRAPS SHALL BE FLUSH WITH THE BACK OF THE SIGN WITH ONE EACH ACROSS THE TOP AND BOTTOM OF THE SIGN. THE CENTERLINE OF EACH POST SHALL BE INSET 1/6TH OF THE SIGN WIDTH FROM THE EDGE OF THE SIGN. SIGN PLATE BOLT HOLES SHALL BE 3/8 INCH DIAMETER, DRILLED OR PUNCHED, AS SHOWN ON THE SIGN PLATE DETAILS.
- EACH 42 OR 48 INCH WIDE x 18 OR 24 INCH HIGH SIGN REQUIRES ONE 2 INCH x 1/2 INCH x (WIDTH OF SIGN) ALUMINUM OR GALVANIZED STEEL STRAP LOCATED IN THE CENTER OF THE SIGN AND FLUSH WITH THE BACK OF THE SIGN.
- SIGN ASSEMBLIES SHALL BE MOUNTED ON ALUMINUM OR GALVANIZED STEEL STRAP FRAMES. FOR DETAILS AND STRAP SPECIFICATIONS REFER TO SIGN ASSEMBLY-TYPICAL FRAMING DETAILS.
- TYPE III (HIGH INTENSITY) REFLECTIVE SHEETING SHALL BE USED FOR ALL STANDARD HIGHWAY SIGNS REQUIRING REFLECTORIZED BACKGROUNDS EXCEPT AS SPECIFIED BELOW OR SPECIFIED OTHERWISE IN THE PLANS. EITHER CLASS 1 OR CLASS 2 ADHESIVE BACKING IS PERMISSIBLE.
- TYPE IX (VERY HIGH INTENSITY) REFLECTIVE SHEETING SHALL BE USED FOR ALL RED SERIES SIGNS (R1-1, R1-2, R1-3A, R1-4A, R5-1, R5-1A).
- TYPE IX (VERY HIGH INTENSITY) FLUORESCENT YELLOW GREEN REFLECTIVE SHEETING SHALL BE USED FOR SCHOOL ZONE (S1-1, S2-1, S3-1, S4-3 AND THE TOP PORTION OF THE S5-1) SIGNS, BICYCLE CROSSING (W11-1) SIGNS, AND PEDESTRIAN CROSSING (W11-2 AND W11A-2) SIGNS. SIGNS WITHIN THE SAME ASSEMBLY AS THE SCHOOL ZONE SIGNS SPECIFICALLY LISTED ABOVE AND ALL REGULATORY SIGNS PLACED AS PART OF THE SCHOOL ZONE SIGNING SHALL HAVE TYPE VI (VERY HIGH INTENSITY) REFLECTIVE SHEETING BACKGROUNDS OF THE APPROPRIATE COLOR.
- TYPE IX (VERY HIGH INTENSITY) FLUORESCENT YELLOW REFLECTIVE SHEETING SHALL BE USED FOR ALL WARNING SIGNS.
- A 1/2 INCH MINIMUM AIR SPACE SHALL BE REQUIRED BETWEEN ALL SIGN PLATES WITHIN AN ASSEMBLY.
- WHERE SIGNS WITHIN AN ASSEMBLY EXTEND BELOW THE STANDARD MOUNTING HOLES ON THE POST(S), ADDITIONAL 3/8 INCH DIAMETER HOLE(S), DRILLED OR PUNCHED, SHALL BE REQUIRED TO PROPERLY MOUNT THE ASSEMBLY.
- INTERSTATE SHIELDS SHALL CONTAIN THE WORD GEORGIA. ALL INTERSTATE, U.S. AND GEORGIA SHIELDS REQUIRING ALT, BUS, CONN, LOOP, OR SPUR SHALL USE 4 INCH SERIES "D" LETTERS. REFER TO THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES, CURRENT EDITION, FOR DETAILS.
- FOR DETAILS OF SPECIAL DESIGN HIGHWAY SIGNS, SEE DETAILS OF MISCELLANEOUS SIGNS.
- REFER TO PLAN SHEETS FOR LOCATION OF THE DISTRICT ENGINEERS' OFFICE TO BE SHOWN ON ALL R552-1 (LIMITED ACCESS) SIGNS IN THIS PROJECT, IF ANY.
- CONTRACTOR WILL, AS REQUESTED BY THE DISTRICT TRAFFIC OPERATIONS ENGINEER, BE REQUIRED TO REMOVE ANY EXISTING SIGNS THAT ARE DUPLICATED OR ARE CONTRARY TO THESE SIGN PLANS.

NOTES:  
IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO COORDINATE WITH THE UTILITY OWNER ON ANY SPECIAL WORK REQUIREMENTS NEEDED OUTSIDE OF NORMAL RELOCATION AS SHOWN IN THE UAS TO PERFORM THE WORK, INCLUDING BUT NOT LIMITED TO, THE USE OF CRANES, LOCATION OF CRANES AND ANY OTHER EQUIPMENT AND/OR MATERIAL PRIOR TO BID. THIS SHALL BE INCLUDED IN THE OVERALL BID PRICE FOR THE WORK AND IS NOT SUBJECT TO ANY REIMBURSEMENT COSTS BY THE DEPARTMENT.

- THERE IS NO SUITABLE PLACE TO BURY THE CONSTRUCTION DEBRIS WITHIN THE PROJECT'S LIMITS. THE CONTRACTOR SHALL PROVIDE AN ENVIRONMENTALLY APPROVED SITE TO DISPOSE OF THE EXISTING CONSTRUCTION DEBRIS AT NO ADDITIONAL COST TO THE DEPARTMENT.
- PRICE OF ALL PIPES, HEADWALL, CULVERTS DESIGNATED TO BE REMOVED SHALL BE INCLUDED IN PRICE.
- BID FOR CLEARING AND GRUBBING. UNLESS OTHERWISE NOTED THE ELEVATION OF ROCK EMBANKMENT APPLIES TO EASTERN END OF THE PROJECT. THE ROCK EMBANKMENT ON THE WEST SIDE OF THE PROJECT IS CONTROLLED BY THE BRIDGE CLEARANCE OVER TRAIL A.

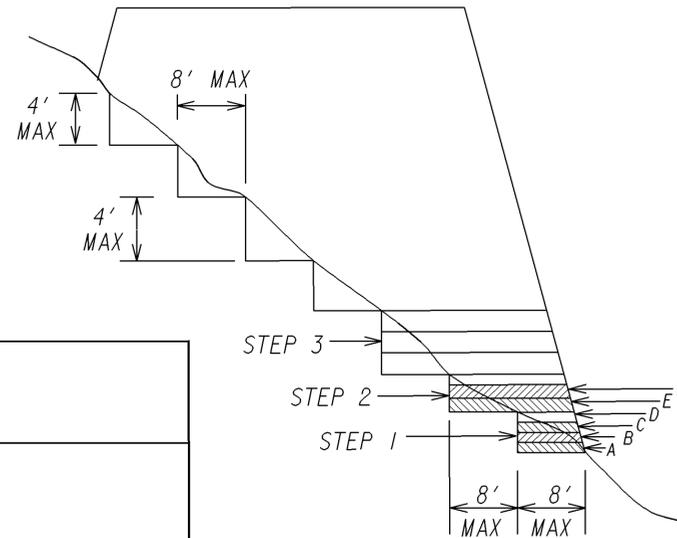

- WHERE THE EMBANKMENT IS TO BE PLACED ON A HILLSIDE OR ANOTHER EXISTING EMBANKMENT HAVING A SLOPE OF 3 TO 1 OR STEEPER, THE FOUNDATION MUST BE BENCHED WHILE THE EMBANKMENT IS BEING MADE. (SEE DIAGRAM AT LEFT.)
- THE DIAGRAM SHOWS THAT BEFORE LAYER "A" IS PLACED THE FIRST (1) IS CUT INTO THE SLOPE A MAXIMUM DISTANCE OF ABOUT 8 FEET SUCCESSIVE LAYERS B, C, AND D ARE THEN PLACED BEFORE LAYER "E" IS PLACED, THE SECOND STEP IS CUT 8 FEET INTO THE SLOPE AND SUCCESSIVE LAYERS ARE AGAIN PLACED. IF IT IS ANTICIPATED THAT THE VERTICAL PART OF THE STEP WILL EXCEED 4 FEET IF A 8 FEET HORIZONTAL CUT IS MADE, THEN THE ACTUAL CUT STOPS WHEN THE VERTICAL PART REACHES A MAXIMUM OF 4 FEET ALLOWING THE HORIZONTAL DISTANCE TO VARY.
- THE PROCESS OF BENCHING IS CONSIDERED INCIDENTAL TO THE ITEM OF UNCLASSIFIED EXCAVATION AND BORROW IN CONSTRUCTION OF THE EMBANKMENT AND NO ADDITIONAL MEASUREMENT OF QUANTITY OR PAYMENT WILL BE MADE FOR BENCHING.

TYPE OF PIPE INSTALLATION		CORRUGATED STEEL AASHTO M-36		CORRUGATED ALUMINUM AASHTO M-196	PLASTIC				
		ALUMINUM COATED (TYPE 2) CORR. STEEL	PLAIN ZINC COATED	PLAIN UNCOATED ALUMINUM	CORR. POLY-ETHYLENE AASHTO M-252	CORR. POLY-ETHYLENE SMOOTH LINED AASHTO M-294 TYPE "S"	POLY VINYL CHLORIDE (PVC) PROFILE WALL AASHTO M-304	POLY VINYL CHLORIDE (PVC) CORRUGATED SMOOTH INTERIOR ASTM F-949	
STORM DRAIN	LONGITUDINAL INTERSTATE AND TRAVEL BEARING	X							
	LONGITUDINAL NON-INTERSTATE AND NON-TRAVEL BEARING	X	X	X	X	X	X	X	
	GRADE ≤ 10%	ADT < 250	X	X	X	X	X	X	X
		250 < ADT < 1500	X	X*	X	X	X	X	X
		1500 < ADT < 15000	X			X	X	X	X
	ADT > 1500	X							
GRADE > 10%	ADT < 250		X	X	X	X	X	X	
	ADT > 250			X	X	X	X	X	
SIDE DRAIN		X	X	X	X	X	X	X	
PERMANENT SLOPE DRAIN			X	X	X	X	X	X	
PERFORATED UNDERDRAIN			X	X	X	X	X	X	

\* THIS PIPE CAN BE USED IF THE ADDITION OF TYPE "B" COATING (AASHTO M-190, HALF BITUMINOUS COATED WITH PAVED INVERT) IS UTILIZED.

NOTES:

- ALLOWABLE MATERIALS ARE INDICATED BY AN "X".
- STRUCTURAL REQUIREMENTS OF STORM DRAIN PIPE WILL BE IN ACCORDANCE WITH GEORGIA STANDARD 1030-D OR 1030-P, WHICHEVER IS APPLICABLE, AND THE STANDARD SPECIFICATIONS.
- GRADED AGGREGATE BACKFILL SHALL BE USED IN CROSS DRAIN APPLICATIONS FOR ALL PLASTIC PIPES (AASHTO M-294, HDPE PIPE, AASHTO M-304, PVC PIPE, ASTM F-949 PIPE) REVISED 10-04-05
- TEMPORARY PIPE CAN BE CMP, PLASTIC OR CONCRETE.
- USE THE ALLOWABLE PIPE CHART UNLESS OTHERWISE NOTED ON THE PLANS.
- THE CONTRACTOR SHALL PROVIDE ADDITIONAL STORM SEWER CAPACITY CALCULATIONS IF A PIPE MATERIAL OTHER THAN CONCRETE IS SELECTED.

# PROJECT NOTES

- THE FOLLOWING UTILITY OWNERS HAVE FACILITIES WHICH CONFLICT WITH CONSTRUCTION ON THIS PROJECT:  

NAME OF UTILITY OWNER	TYPE OF FACILITY
GEORGIA POWER COMPANY	POWER
AT&T	TELEPHONE
COLUMBIA COUNTY WATER & SEWERAGE	WATER
COMCAST CATV	CABLE TV
COLUMBIA COUNTY BROADBAND	BROADBAND
- ALL BORROW AND WASTE SITES FOR THIS PROJECT SHALL BE ENVIRONMENTALLY APPROVED PRIOR TO CONSTRUCTION ACTIVITIES OCCURRING IN THEM. ALL COMMON FILL OR EXCESS MATERIAL DISPOSED OUTSIDE THE PROJECT RIGHT OF WAY SHALL BE PLACED IN EITHER A PERMITTED SOLID WASTE FACILITY, A PERMITTED INERT WASTE LANDFILL OR IN AN ENGINEERED FILL. : SEE SECTION 201 OF THE STANDARD SPECIFICATION AND SUPPLEMENTS THERETO FOR ADDITIONAL INFORMATION.
- THIS PROJECT REQUIRES A NOTICE OF INTENT.
- ALL REQ'D FENCE SHALL BE ERECTED PRIOR TO THE REMOVAL OF EXISTING FENCE TO PROTECT LIVESTOCK & PROPERTY AND SHALL BE LOCATED 1'-0" OUTSIDE REQ'D RIGHT OF WAY.

GEORGIA  
DEPARTMENT OF TRANSPORTATION  
GENERAL NOTES / PROJECT NOTES

PROJECT: STP00-0076-01(028)  
COUNTY: COLUMBIA

DRAWING No.  
04-001

REVISION DATES  
6-2-14