



TYPICAL SHOULDER DETAIL FOR GUARDRAIL SEE PLAN FOR LOCATION

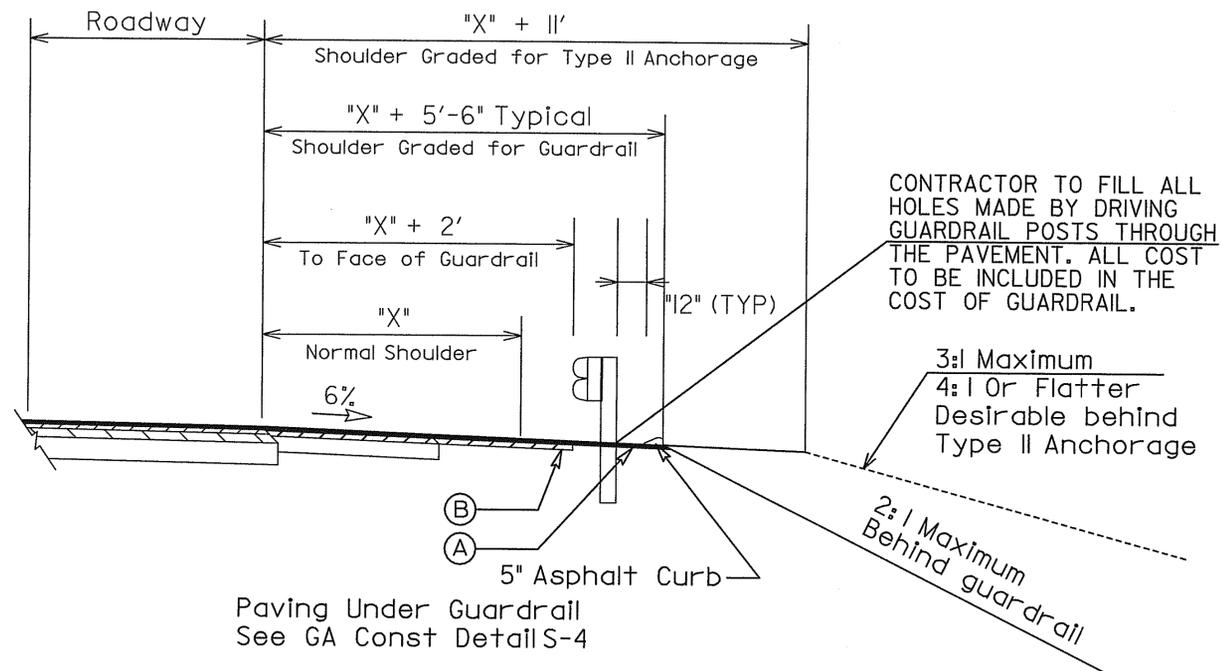


- (A) 1.5" (165 LB/SY) 12.5 mm SUPERPAVE
- (B) 2" (220 LB/SY) 19 mm SUPERPAVE

PAVED DITCH TYPICAL SEE PLANS FOR LOCATIONS

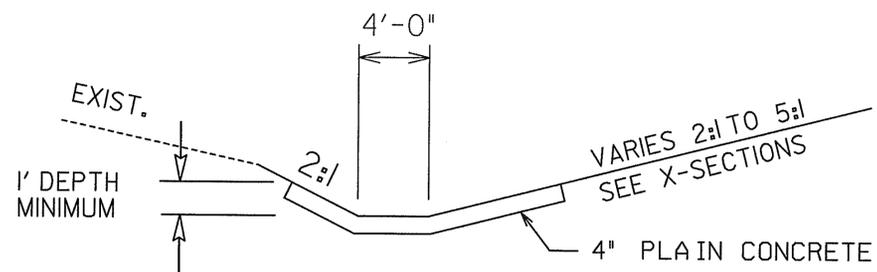

CLASS B CONCRETE WIDENING DETAIL

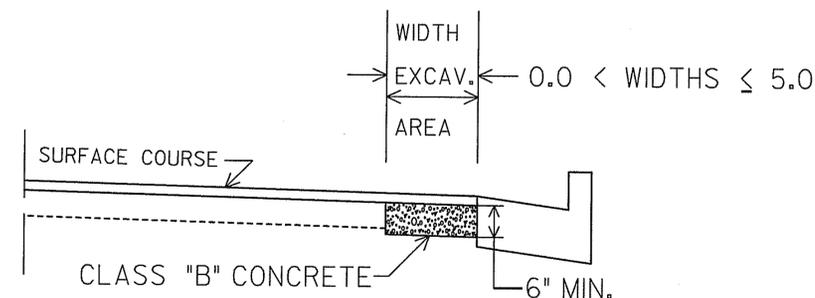

NO SCALE
CLASS "B" CONCRETE BASE OR PAVEMENT WIDENING
Item Code 500-9999 - Cu. Yds.


In excavated areas between the existing paving and new curb and gutter that are 5'-0" or less in width, Class "B" concrete shall be placed in lieu of the base and paving specified by the typical section. Payment will be made under "Class B Concrete Base and Pavement Widening".

In excavated areas greater than 5'-0" in width, the Contractor shall place base and paving as specified on the typical section.


See plans for details of curb and gutter construction.

PAVEMENT REINFORCING FABRIC DETAIL

TYPICAL SECTION DETAIL TO BE USED WHEN
EXISTING PAVEMENT IS TO BE RESURFACED WITH
TWO INCHES OR MORE OF ASPHALTIC CONCRETE

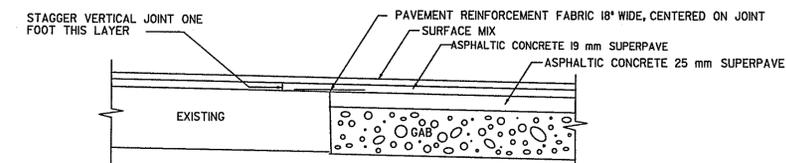

TYPICAL SECTION DETAIL TO BE USED WHEN
EXISTING PAVEMENT IS TO BE RESURFACED WITH
LESS THAN TWO INCHES OF ASPHALTIC CONCRETE

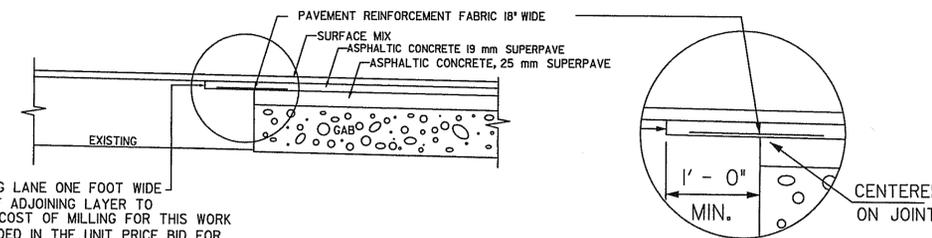

MILL EXISTING LANE ONE FOOT WIDE TO DEPTH OF ADJOINING LAYER TO BE PLACED. COST OF MILLING FOR THIS WORK TO BE INCLUDED IN THE UNIT PRICE BID FOR PAVEMENT REINFORCING FABRIC.

MULKEY
ENGINEERS & CONSULTANTS
1255 CANTON STREET, SUITE G
ROSWELL, GEORGIA 30075
(678) 461-3511

DRAWING NOT TO SCALE

REVISION DATES

| DATE | DESCRIPTION |
|--------|-------------|
| 8/4/09 | |
| | |
| | |
| | |
| | |

STATE OF GEORGIA
DEPARTMENT OF TRANSPORTATION
OFFICE: CONSULTANT DESIGN
TYPICAL SECTIONS

DETAILS

DRAWING No.
5-09