| STATE | PROJECT NUMBER | SHEET NO. | TOTAL SHEETS |
|---|---|---|---|
| GA. | BRSTO-0054-01(064) | 61 | 128 |




REVERSIBLE LANE SIGN OR SIGNAL SYSTEM REQUIRED

TWO-WAY TRAFFIC WITH A REVERSIBLE CENTER LANE




TWO-WAY TRAFFIC WHERE MOTORISTS IN A SINGLE LANE ARE PERMITTED TO PASS




TWO-WAY TRAFFIC WHERE MOTORISTS IN A SINGLE LANE ARE NOT PERMITTED TO PASS




TWO-LANE, TWO-WAY TRAFFIC WITH PASSING PERMITTED




MULTI-LANE, TWO-WAY TRAFFIC WITH SINGLE LANE, TWO-WAY LEFT TURN CHANNELIZATION




ONE-WAY TRAFFIC WITH ADDED TURN LANES

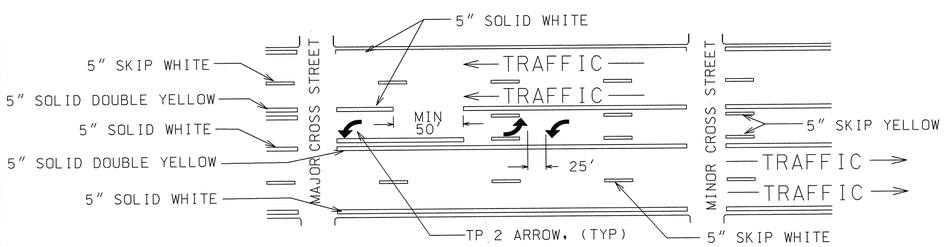


DIVIDED HIGHWAY WITH RAISED MEDIAN

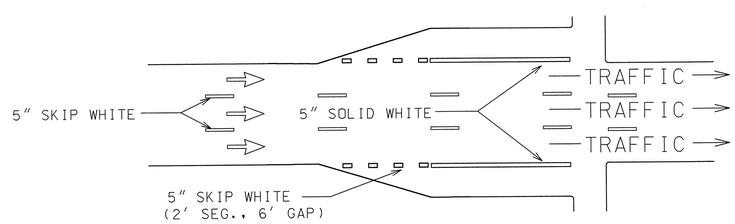


TYPICAL LOCATION OF CROSSWALKS AND STOP BARS

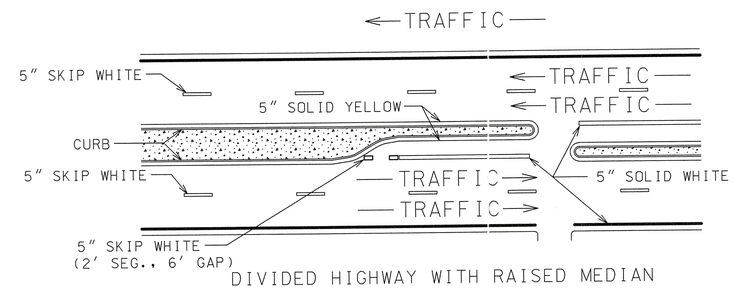


*USE WHERE THE LANE WIDTH EXCEEDS 12' OR WHERE LANE LINES HAVE BEEN OMITTED

CROSSWALK DETAIL
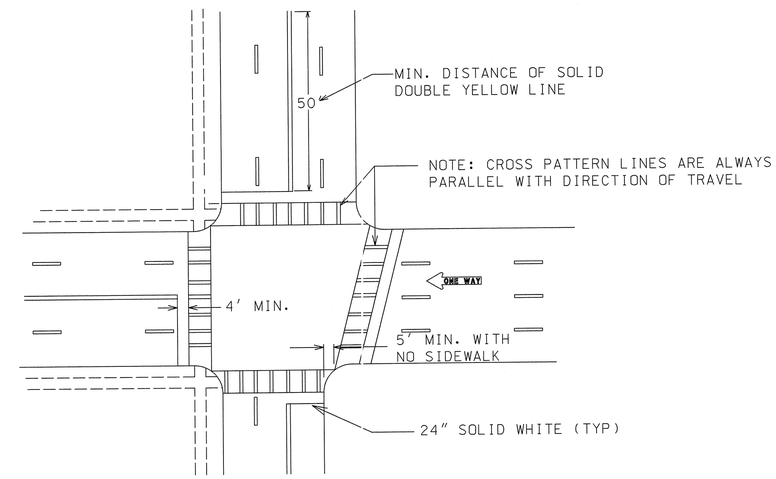
## GENERAL NOTES:

1. SPACING BETWEEEN DOUBLE LINES SHALL BE EQUAL TO THE LINE WIDTH.
2. EDGE LINES SHALL BE PLACED A MINIMUM OF 4 INCHES FROM THE NORMAL EDGE OF PAVEMENT.
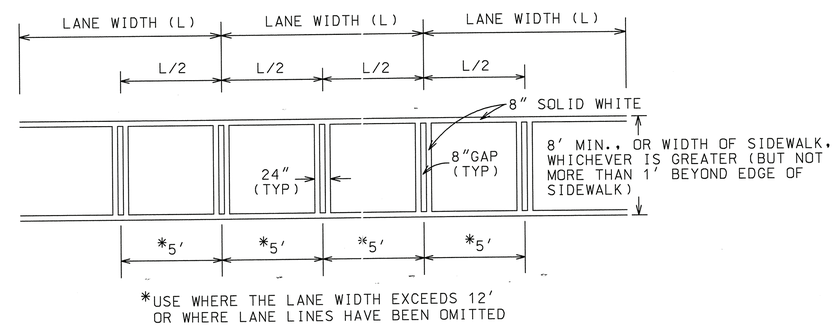
| DATE | REVISIONS |
|---|---|
| | |

GEORGIA DEPARTMENT OF TRANSPORTATION
OFFICE OF TRAFFIC SAFETY & DESIGN

DETAILS OF PAVEMENT MARKING PLACEMENT NON-LIMITED ACCESS ROADWAY

NO SCALE JANUARY 2000

T-11A

PCBDTB