STATE	PROJECT NUMBER	SHEET NO	TOTAL SHEETS
GA.	CSSTP-0007-00(415)	80	145

ASPHALT PAVEMENT - OVERLAY

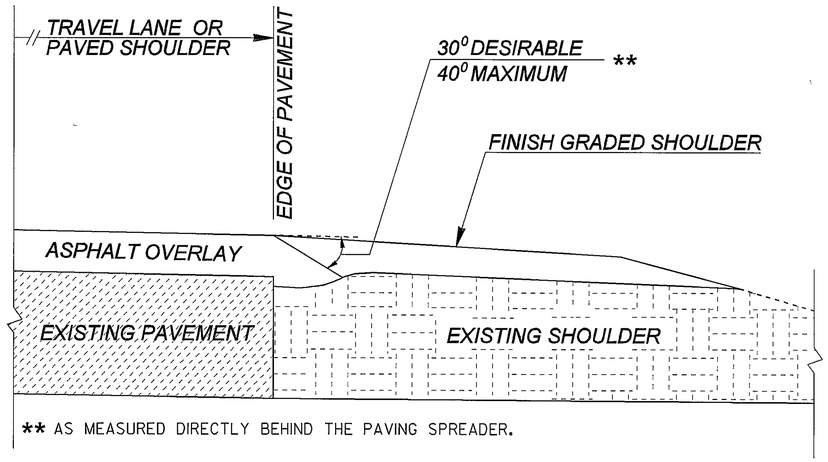

** AS MEASURED DIRECTLY BEHIND THE PAVING SPREADER.

ADDITIONAL QUANTITIES:
DEPTH OF OVERLAY (T), NO RUTTING
$(T)^2$ (IN.) X 0.000441 TN/IN.-FT X LENGTH (FT) = _____TN

DEPTH OF OVERLAY (T), WITH 1 IN. RUTTING
$(T)^2$ (IN.) X 0.000441 TN/IN.-FT X LENGTH (FT) + (T) (IN.) X 0.000882 TN/IN.-FT X LENGTH (FT) = _____TN

PLAIN PC CONCRETE PAVEMENT OR ROLLER COMPACTED CONCRETE PAVEMENT

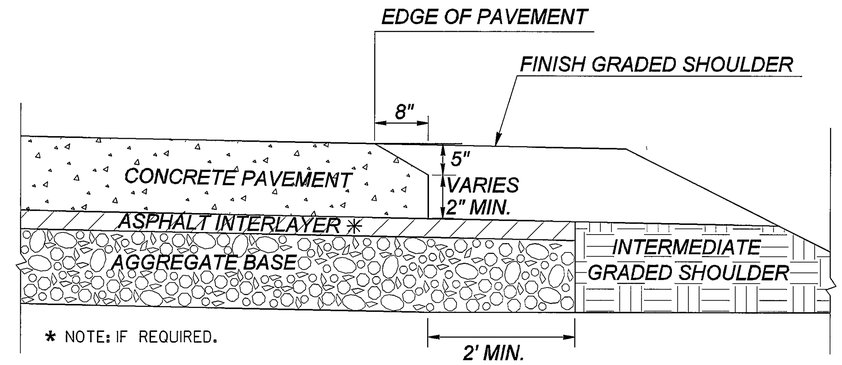

* NOTE: IF REQUIRED.

ADDITIONAL QUANTITIES:
CONCRETE
0.07407 SY/FT X LENGTH (FT) = _____SY

ASPHALT INTERLAYER, IF REQUIRED
(T) IN. X LENGTH (FT) X 0.004074 TN/IN.-FT = _____TN

AGGREGATE BASE (BASED ON 2.07 TN/CY)
(T) IN. X LENGTH (FT) X 0.0042592 TN/IN.-FT = _____TN

ASPHALT PAVEMENT - NEW

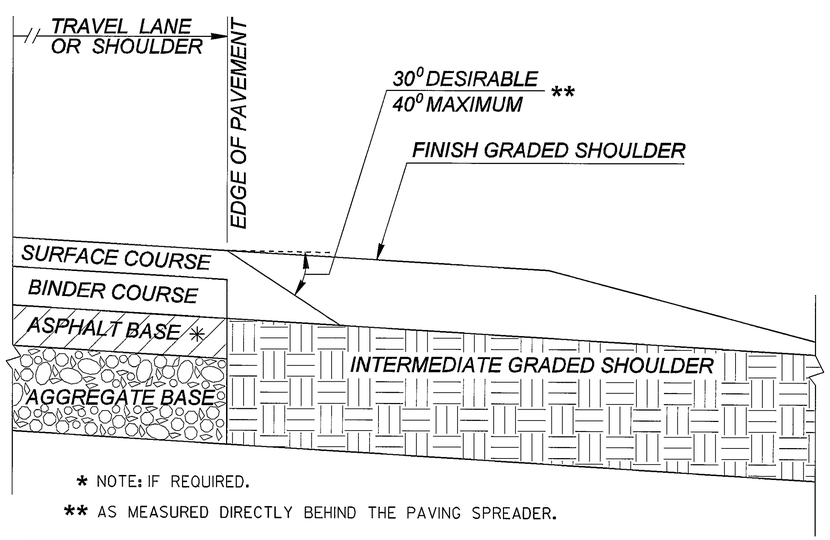

* NOTE: IF REQUIRED.

** AS MEASURED DIRECTLY BEHIND THE PAVING SPREADER.

ADDITIONAL QUANTITIES:
SURFACE COURSE PAVING DEPTH (T)
$(T)^2$ (IN.) X 0.000441 TN/IN.-FT X LENGTH (FT) = _____TN

GENERAL NOTES:

1. THE SAFETY EDGE SHALL BE CONSTRUCTED AS AN INTEGRAL OPERATION OF THE ROADWAY PAVEMENT PLACEMENT PROCESS.

(ASPHALT PAVEMENT)

2. USE AN APPROVED MECHANICAL DEVICE THAT WILL:
   1. APPLY COMPACTIVE EFFORT TO THE ASPHALT MIXTURE TO ELIMINATE OBJECTABLE VOIDS AS THE MIXTURE PASSES THROUGH THE WEDGE DEVICE.
   2. PRODUCE A WEDGE WITH A UNIFORM TEXTURE, SHAPE, AND DENSITY WHILE AUTOMATICALLY ADJUSTING TO VARYING HEIGHTS ENCOUNTERED ALONG THE ROADWAY SHOULDER.
3. A SINGLE-PLATE STRIKE-OFF METHOD SHALL NOT BE USED FOR BITUMINOUS PAVING, AS THE SINGLE-PLATE STRIKE-OFF METHOD HAS BEEN FOUND TO PRODUCE A NON-DURABLE EDGE.
4. COMPACTION OF THE EDGE SHOULD NOT BE DONE WITH THE FIRST PASS OF THE ROLLER: WITH THE ROLLER STAYING OFF THE EDGE AT LEAST 6 INCHES. THIS IS IN ORDER TO ALLOW THE EDGE MIX TO SLIGHTLY COOL PRIOR TO COMPACTION.
5. SHORT SECTIONS OF HANDWORK ARE ALLOWED, WHEN NECESSARY, FOR TRANSITIONS AND TURNOUTS.

CONTINUOUS REINFORCED CONCRETE PAVEMENT

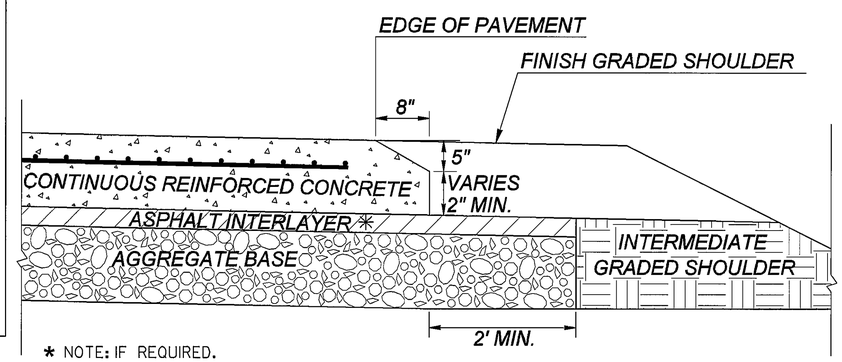

* NOTE: IF REQUIRED.

ADDITIONAL QUANTITIES:
CONCRETE
0.07407 SY/FT X LENGTH (FT) = _____SY

ASPHALT INTERLAYER, IF REQUIRED
(T) IN. X LENGTH (FT) X 0.004074 TN/IN.-FT = _____TN

AGGREGATE BASE (BASED ON 2.07 TN/CY)
(T) IN. X LENGTH (FT) X 0.0042592 TN/IN.-FT = _____TN

TC	BY		DATE	REVISION
	DES	B.A.S.	11-15-11	REVISED ANGLE TOLERANCE
	DRW.	G.L.O.		ANGLE & ADDED NOTE.
	CHK.	D.G.P.		
	REVIEW	B.A.S.		

DEPARTMENT OF TRANSPORTATION
STATE OF GEORGIA

CONSTRUCTION DETAIL
PAVEMENT EDGE TREATMENT
ASPHALT AND CONCRETE PAVEMENT

NO SCALE — SEPTEMBER 2011

NUMBER P-7

11/17/2011 2:02:12 PM \\GDOT-DSN1\GDOFLOT\DCF\GD_RIPBOOK\JOB\DOOPBIR_GD_XOOL_JOB_DOOPBIR\PC\Rev1ised\P-7\P-7.prf