
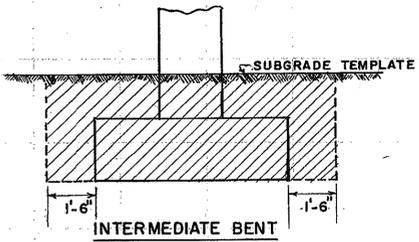


NOTE: WHERE FILL IS PLACED BEFORE CONSTRUCTION OF STRUCTURES THE COST OF EXCAVATION AND BACKFILL WILL BE INCLUDED IN THE COST OF OTHER ITEMS. THERE WILL BE NO PAYMENT FOR EXCAVATION UNDER THIS CONDITION.

NOTES:

1. PERFORATED UNDERDRAIN SHALL EXTEND TO THE INSIDE FACE OF WING AT THE HIGH END OF THE CAP.
2. AT THE LOW END OF THE CAP, CONNECT PERFORATED UNDERDRAIN TO A COMPATIBLE SOLID PIPE FROM THE INSIDE FACE OF WING UNTIL IT EXITS THE SLOPE. SOLID PIPE SHALL HAVE A MINIMUM SLOPE OF 2.0%.
3. SOLID PIPE MAY BE PLACED AT EITHER END OF CAPS WITH LEVEL BOTTOM.
4. PERFORATED UNDERDRAIN SHALL BE INSTALLED PARALLEL TO BOTTOM OF CAP. LOW POINTS OR SAGS THAT MAY TRAP WILL NOT BE ALLOWED.
5. FILTER FABRIC SHALL NOT BE ATTACHED TO THE END BENT CAP.
6. COST FOR PROVIDING AND INSTALLING FILTER FABRIC, UNDERDRAIN, AND STONE SHALL BE INCLUDED IN THE PRICE BID FOR CONTRACT ITEMS.

SHADED AREA IS BRIDGE EXCAVATION.

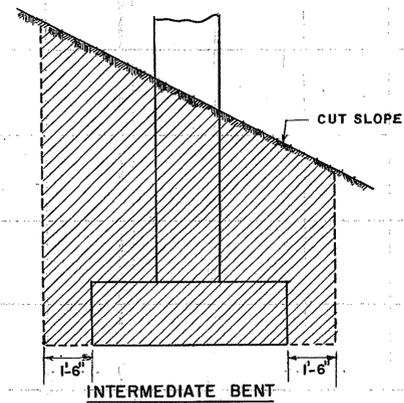

TYPICAL EXCAVATION DETAILS AT BRIDGE BENTS IN CUT SECTIONS
 NO SCALE

REV. STAGE CONSTRUCTION CL. III-A SOILS ALLOWED	10-20-97	DEPARTMENT OF TRANSPORTATION	
	4-2-88	STATE OF GEORGIA	
BY	REVISION	STANDARD	
		TYPICAL FILL DETAIL AT END OF BRIDGE	
		NO SCALE	REV. & REDR. APRIL, 1982
DES. _____	(SUBMITTED) <i>Wendell B. Spiving</i>	NUMBER	
DRW. _____	STATE BRIDGE & STRUCTURAL DESN ENGR	9037	
TRA. _____	(APPROVED) <i>T. B. Morala</i>	STATE HIGHWAY ENGINEER	
CHK. _____			