12/11/2013 kstewart	Wed Dec 11 11:41:16 2013	\\gdot-dsn1\gocfg\resources\Gdot-2012.tbl	J:\DESIGN\Projects Let\550610\1A 550610 FILES FOR CONTRACTOR for CD\DGN plans\50610typ.dgn	STATE	PROJECT NUMBER	SHEET NO.	TOTAL SHEETS
				GA	STP00-5005-00(004)	10	282

TYPICAL SECTION # 9 SR 292

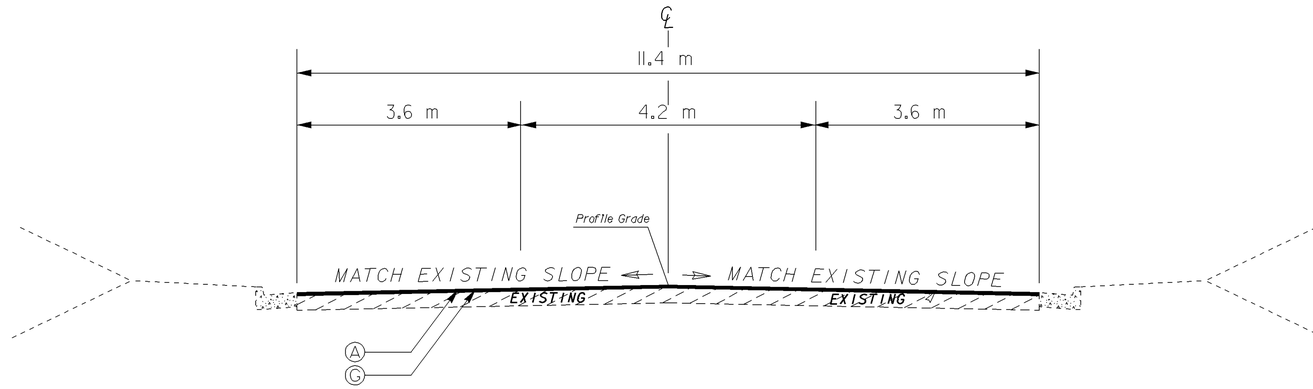

TANGENT SECTION

APPLIES TO STA. 4+953.87 TO STA. 5+360.00
APPLIES TO STA. 5+380.00 TO STA. 5+560.00

REQUIRED PAVEMENT SECTION

- Ⓐ 9.5 mm ASPH. CONC. SUPERPAVE, 75 kg/m²
- Ⓑ 19.0 mm ASPH. CONC. SUPERPAVE, 120 kg/m²
- Ⓒ 25.0 mm ASPH. CONC. SUPERPAVE, 240 kg/m²
- Ⓓ GRADED AGGREGATE BASE 200 mm
- Ⓔ ASPH. CONC. LEVELING INCL. BITUM. MAT'L. & H LIME, AS REQ'D
- Ⓕ 200mm x 762mm CONC. CURB & GUTTER GA. STD. 9032B, TYPE 2
- Ⓖ MILL ASPH. CONC. PAVING, VARIABLE DEPTH
- ★ SAFETY EDGE PLACEMENT PER GDOT CONSTRUCTION DETAIL P-7

TYPICAL SECTION # 10 SR 292

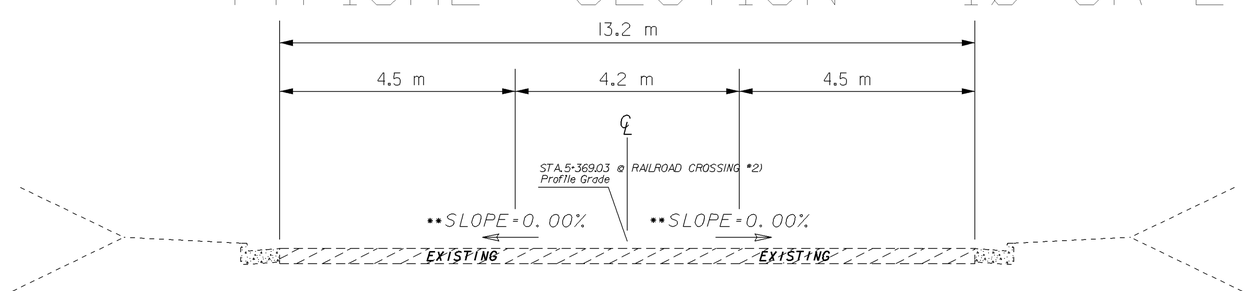

APPLIES TO STA. 5+360.00 TO STA. 5+380.00

** TAPER Ⓐ DOWN FROM STA. 5+360.030 TO STATION 5+369.45 @ RAILROAD CROSSING #2
** TAPER Ⓐ UP FROM STA. 5+369.45 @ RAILROAD CROSSING #2 TO STA. 5+380.00

USE ON CONSTRUCTION

GEORGIA
DEPARTMENT OF TRANSPORTATION

NOT TO SCALE

REVISION DATES		
12-20-13		

STATE OF GEORGIA
DEPARTMENT OF TRANSPORTATION
OFFICE: DISTRICT 5 ROAD DESIGN

TYPICAL SECTIONS

PROJECT STP00-5005-00(004)
COUNTY: MONTGOMERY/TOOMBS
DATE 12-12-12 SH 5 OF 10

DRAWING No. 05-005

1/5/2009 GPLN