




DIVIDED / UNDIVIDED HIGHWAY




REVERSIBLE LANE

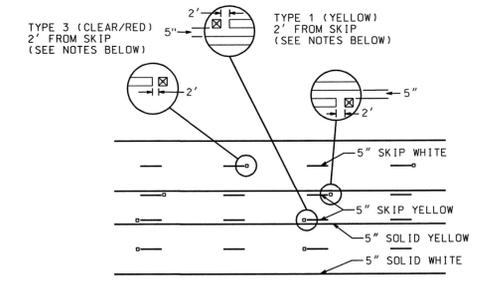

TWO WAY LEFT TURN LANE

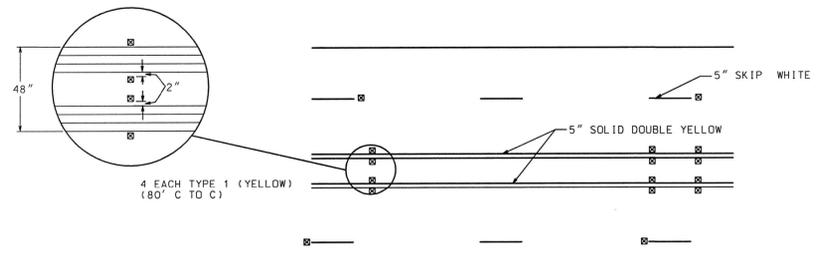

4'-0" STRIPED FLUSH MEDIAN

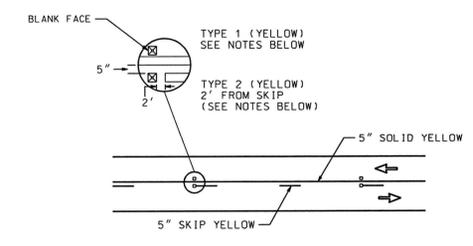

NO PASSING ZONE

- GENERAL NOTES:
1. RAISED PAVEMENT MARKERS SHALL BE SPACED EVERY 80 FT UNLESS OTHERWISE SPECIFIED.
  2. ON SOLID WHITE TURN BAY LINES, SPACING SHALL BE 20 FT.
  3. RAISED PAVEMENT MARKERS SHALL BE OFFSET 5 INCHES FROM SOLID LANE LINES.
  4. CLEAR FACE OF TYPE 3 RAISED PAVEMENT MARKERS SHALL BE ORIENTED TOWARD ONCOMING TRAFFIC.
  5. ON HORIZONTAL CURVES WHERE AT LEAST 3 MARKERS CANNOT BE SEEN AT ONE TIME USING NORMAL SPACING, MARKERS SHALL BE PLACED 40 FT.

DATE	REVISIONS	GEORGIA DEPARTMENT OF TRANSPORTATION OFFICE OF TRAFFIC SAFETY & DESIGN
9-4-03	NO PASSING ZONE RPM'S	
1-13-04	NO PASSING ZONE RPM'S	
		DETAILS OF RAISED PAVEMENT MARKER LOCATION NON-LIMITED ACCESS ROADWAY NO SCALE JANUARY 2000

T-15A



REVISION DATES

STATE OF GEORGIA  
DEPARTMENT OF TRANSPORTATION  
OFFICE: PROGRAM DELIVERY  
**CONSTRUCTION DETAILS**  
SRI/US 27 @ SR166  
INTERCHANGE RECONSTRUCTION  
PI NO: 621990

DRAWING No:  
**40-23**