



SKETCH SHOWING CONSTRUCTION OF FILLS AT ENDS OF BRIDGES  
NO SCALE

NOTES:


- PERFORATED UNDERDRAIN SHALL EXTEND TO THE INSIDE FACE OF WING AT THE HIGH END OF THE CAP.
- AT THE LOW END OF THE CAP, CONNECT PERFORATED UNDERDRAIN TO A COMPATIBLE SOLID PIPE FROM THE INSIDE FACE OF WING UNTIL IT EXITS THE SLOPE. SOLID PIPE SHALL HAVE A MINIMUM SLOPE OF 2%.
- SOLID PIPE MAY BE PLACED AT EITHER END OF CAPS WITH LEVEL BOTTOM.
- PERFORATED UNDERDRAIN SHALL BE INSTALLED PARALLEL TO BOTTOM OF CAP. LOW POINTS OR SAGS THAT MAY TRAP WATER WILL NOT BE ALLOWED.
- FILTER FABRIC SHALL NOT BE ATTACHED TO THE END BENT CAP.
- COST FOR PROVIDING AND INSTALLING FILTER FABRIC, UNDERDRAIN, AND STONE SHALL BE INCLUDED IN THE PRICE BID FOR CONTRACT ITEMS.

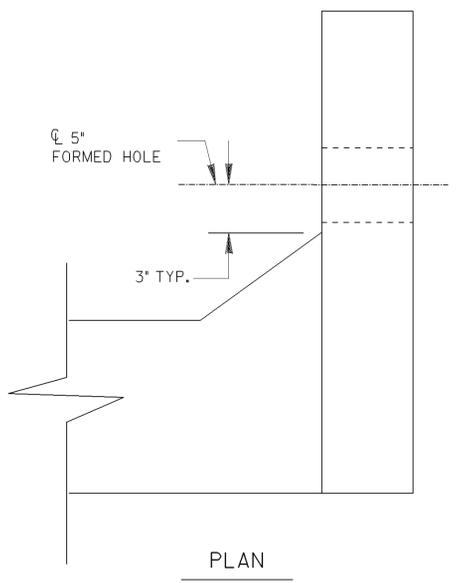

PLAN


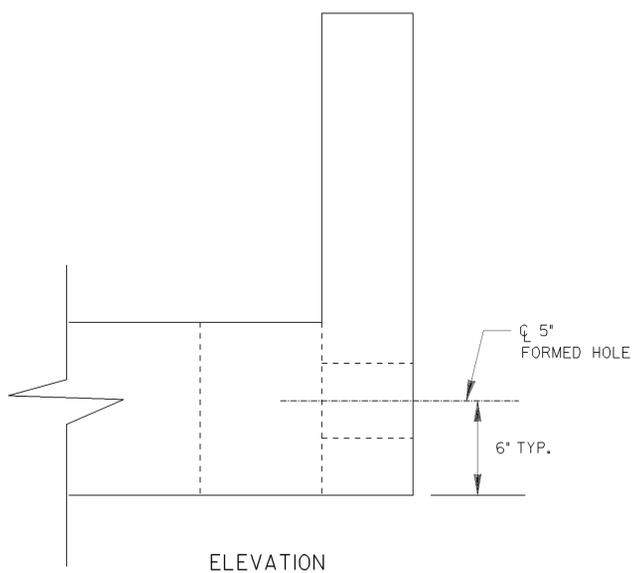


ELEVATION  
WINGWALL DETAIL

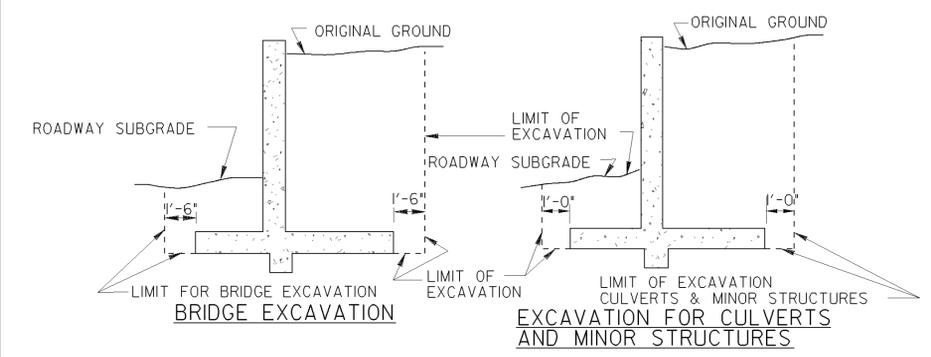

TYPICAL DETAILS OF EXCAVATION AT STRUCTURES

NOTE: WHERE FILL IS PLACED BEFORE CONSTRUCTION OF STRUCTURES THE COST OF EXCAVATION AND BACKFILL WILL BE INCLUDED IN THE COST OF OTHER ITEMS. THERE WILL BE NO PAYMENT FOR EXCAVATION UNDER THIS CONDITION.

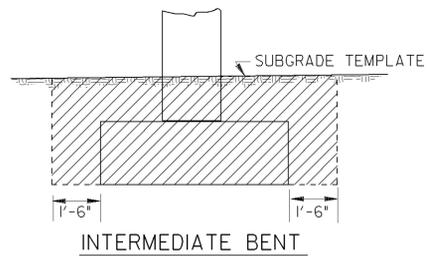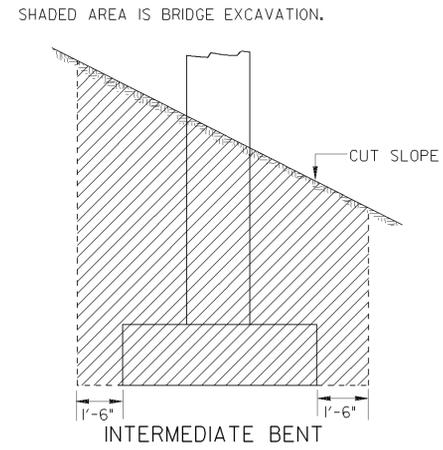

TYPICAL EXCAVATION DETAILS AT BRIDGE BENTS IN CUT SECTIONS  
NO SCALE

DEPARTMENT OF TRANSPORTATION STATE OF GEORGIA	
STANDARD TYPICAL FILL DETAIL AT END OF BRIDGE	
NO SCALE	REDRAWN SEPT., 1999
DES. (SUBMITTED) <i>James H. Kaul</i>	NUMBER 9037
DRW. STATE ROAD & AIRPORT DESIGN ENGR.	
TRA. (APPROVED) <i>Paul L. Parham</i>	
CHK. CHIEF ENGINEER	