STATE	PROJECT NUMBER	SHEET NO.	TOTAL SHEETS
GA	EDF-017-3(39)	65	194

RAISED PAVEMENT MARKER LOCATION DETAILS

NO SCALE

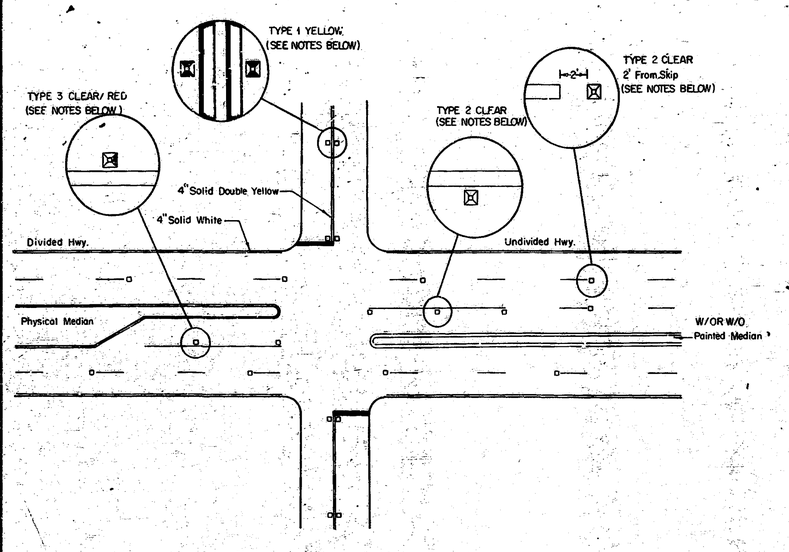

DIVIDED / UNDIVIDED HIGHWAY

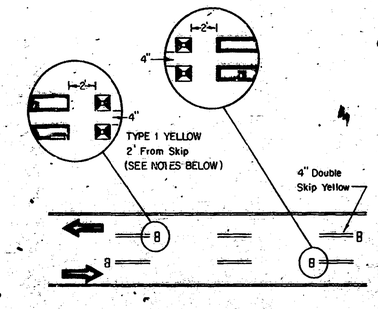

REVERSIBLE LANE

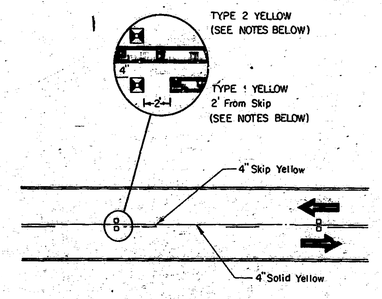

NO PASSING ZONE

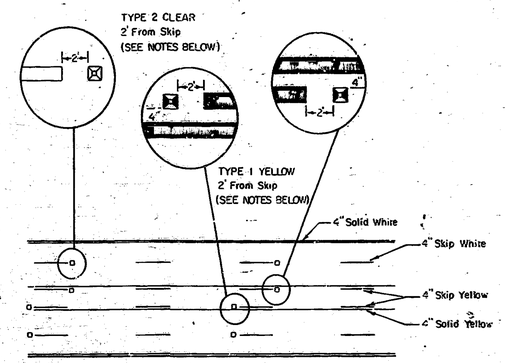

TWO WAY LEFT TURN LANE

DETAIL OF PAVEMENT ARROW - WRONG WAY

ARROW - White reflectorized paint or thermoplastic, as specified, by GEORGIA STANDARD SPECIFICATION, SECTION 655.



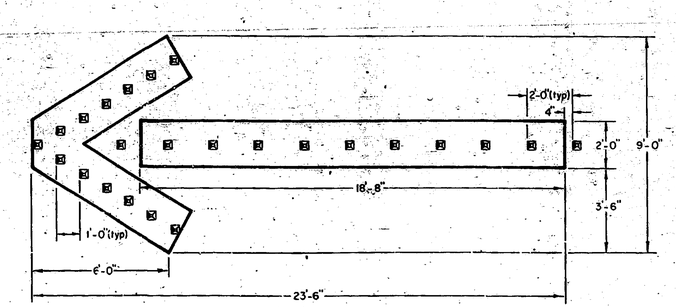

GENERAL NOTES

PAVEMENT MARKERS SHALL NORMALLY BE PLACED ON AN 80' SPACING PATTERN, EXCEPT FOR THE FOLLOWING CASES:

1. PAVEMENT MARKERS SHALL BE PLACED ON A 120' SPACING PATTERN ON THE INTERSTATE AND CONTROLLED ACCESS HIGHWAYS.
2. ON THE LAST 200' OF LANE LINES SEPARATING EXCLUSIVE TURN LANES FROM THRU MOVEMENTS, PAVEMENT MARKERS SHALL BE PLACED ON A 40' SPACING PATTERN. (TWO-WAY-LEFT TURN LANE LINES SHALL BE TREATED AS A NORMAL LANE LINE AND MARKERS SPACED ON 80' SPACING PATTERN.
3. ON HORIZONTAL CURVES WHERE AT LEAST 3 MARKERS CANNOT BE SEEN AT ONE TIME USING NORMAL SPACING, MARKERS SHALL BE PLACED ON 40' SPACING.

REVISION	DATE	BY

DEPARTMENT OF TRANSPORTATION
STATE OF GEORGIA

STANDARD

RAISED PAVEMENT MARKER
LOCATION DETAILS

NO SCALE — AUGUST 1985