24-JUL-2013 13:58 1:58:00 PM 0008690\_04-001 \Roadways\|26379\\0008690\Dgn\\0008690\_04-00|.dgn STATE PROJECT NUMBER SHEET NO. TOTAL SHEETS GA JParks DOT\_IIxI7.pen CSMSL-0008-00(690) 730 I. ALL DRIVEWAYS THAT ARE TO BE RECONSTRUCTED SHALL BE PAVED BACK TO THE R/W, BEYOND THE R/W, ALL RECONSTRUCTED DRIVES SHALL BE REPLACED IN KIND, I.E. ASPHALT FOR ASPHALT, CONCRETE FOR CONCRETE, AND G.A.B. FOR GRAVEL OR EARTH, EXCEPT AS NOTED ON THE PLANS. THE DEPTH OF MATERIALS SHALL BE AS FOLLOWS: COPING 12′-0″ ASPHALTIC CONCRETE DRIVES 8′-0″ RESIDENTIAL RECYCLED ASPH CONC 12.5 MM SUPERPAVE, GP 1 OR 2 , INCL BITUM MATL & H LIME - 165°/SY - RECYCLED ASPH CONC 19 MM SUPERPAVE, GP 1 OR 2 , INCL BITUM MATL & H LIME - 220°/SY - GRADED AGGREGATE BASE CRS, 6° INCL MATL BARBED WIRE COMMERCIAL - RECYCLED ASPH CONC 12.5 MM SUPERPAVE, GP 1 OR 2 , INCL BITUM MATL & H LIME - 165\*/SY RETAINING RECYCLED ASPH CONC 19 MM SUPERPAVE, GP 1 OR 2 , INCL BITUM MATL & H LIME - 220°/SY RECYCLED ASPH CONC 25 MM SUPERPAVE, GP I OR 2 , INCL BITUM MATL & H LIME - 330°/SY

- GRADED AGGREGATE BASE CRS, 8" INCL MATL CONCRETE DRIVES

RESIDENTIAL - 4" CONCRETE DRIVEWAY

- GRADED AGGREGATE BASE CRS. 6" INCL MATL

COMMERCIAL - 8" CONCRETE DRIVEWAY

- GRADED AGGREGATE BASE CRS, IO" INCL MATL
2. ALL DRIVES SHALL BE PAVED TO THE RIGHT-OF-WAY LINE OR TIE-IN POINT, WHICHEVER IS GREATER

3. ALL EXISTING DRAINAGE PIPES SHALL BE REMOVED UNLESS OTHERWISE NOTED ON THE PLANS OR AS DIRECTED BY THE ENGINEER.
ALL COSTS FOR REMOVAL SHALL BE INCLUDED IN THE PRICE BID FOR CONSTRUCTION COMPLETE.

4. THIS PROJECT WILL REQUIRE A NOI.


5. CLEAR AND GRUB THE ENTIRE RIGHT-OF-WAY, EXISTING AND REQUIRED, UNLESS OTHERWISE NOTED ON THE PLANS.

6. EXISTING PAVEMENT AND BASE MATERIAL WHERE FULL-DEPTH NEW CONSTRUCTION OVERLAPS EXISTING SECTION OF ROADWAY SHALL BE REMOVED.

C-I STAY OFF ENVIRONMENTALLY SENISITIVE AREA (ESA) - NO CONSTRUCTION ACTIVITIES OR DISTURBANCE ALLOWED


C-3 THE CONTRACTOR SHALL IMPLEMENT BEST POSSIBLE ENGINEERING AND MANAGEMENT CONTROLS TO ENSURE ADEQUATE PROTECTION OF EMPLOYEE SAFETY IN ACCORDANCE WITH GEORGIA'S RULES FOR HAZARDOUS WASTE MANAGEMENT. THE CONTRACTOR SHALL ALSO ENSURE THAT WORKERS DO NOT COME INTO PROLONGED CONTACT WITH CONTAMINATED SOILS OR GROUNDWATER.

C-4 ANY CONTAMINATED SOIL EXCAVATED OR DISTURBED DURING CONSTRUCTION ACTIVITIES
MUST BE DISPOSED OF OFF-SITE IN ACCORDANCE WITH THE PREVAILING RULES AND REGULATIONS
OF EPD, LAND PROTECTION BRANCH, SOLID WASTE MANAGEMENT PROGRAM RULES AND REGULATIONS.

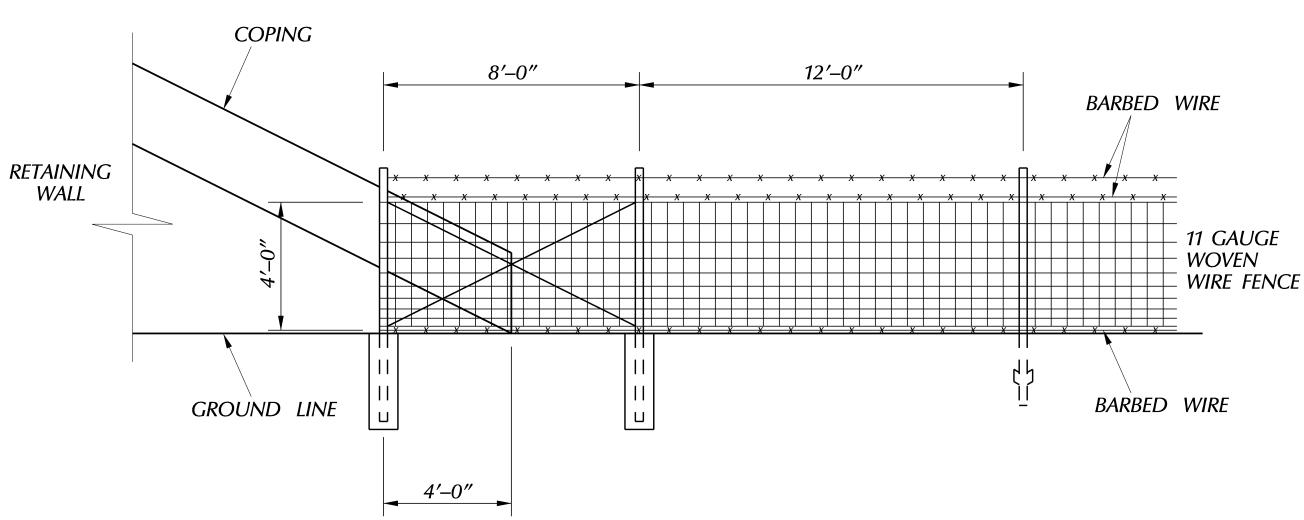

4' WOVEN WIRE FENCE AT RETAINING WALL

FOR FENCING DETAILS, REFER TO GEORGIA D.O.T. STANDARD DETAIL F-1

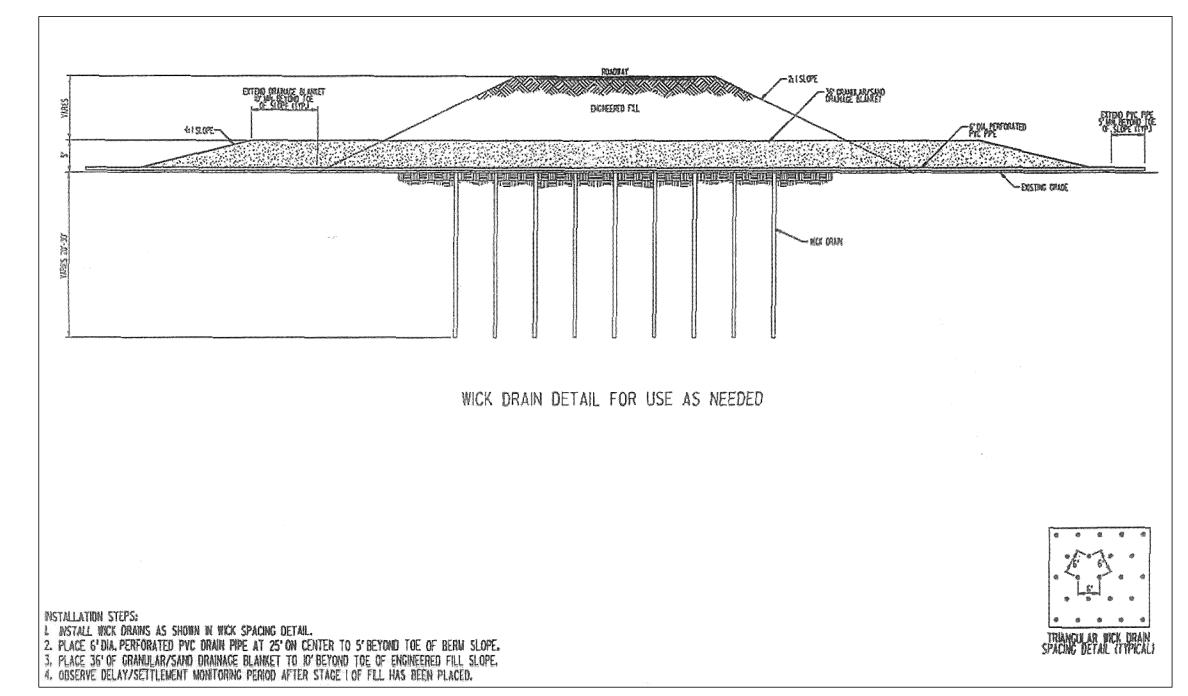

WICK DRAIN DETAIL



**Call** before you dig.



	004/5			
	SCALE IN	FEEI		
0 20	9 40		<del>8</del> 0	

	REVISION DATES		STATE OF GEORGIA			
			DEPARTMENT OF TRANSPORTATION			
			OFFICE:	INNOVATIVE PROGRAM D	DELIVERY	
			GENERAL NOTES			
			_			
					DRAWING No.	

4-001