
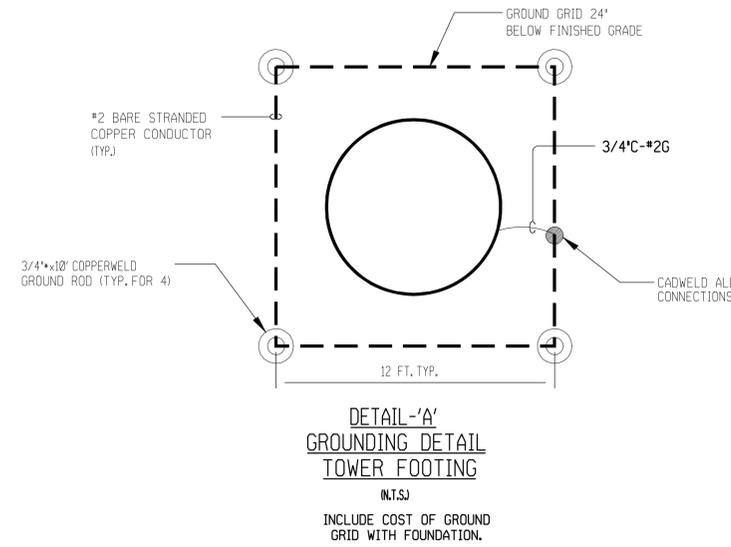


RELEASED FOR CONSTRUCTION - 12/05/11

LIGHTING LEGEND

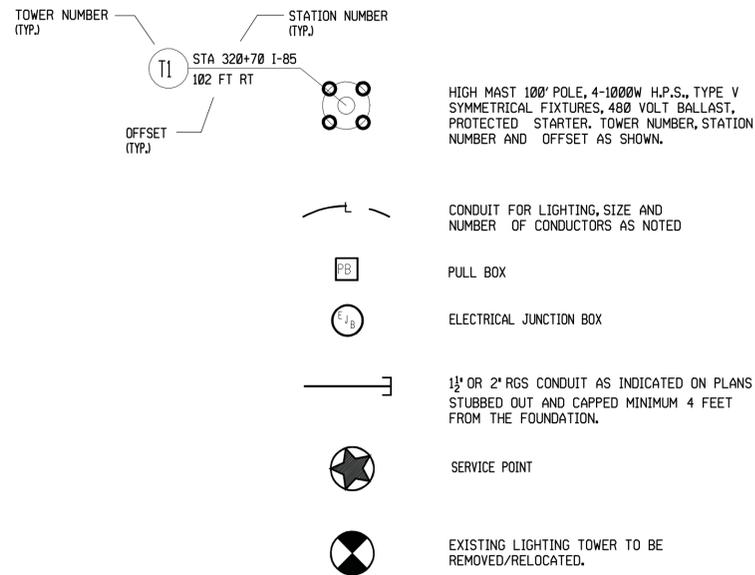

GENERAL NOTES

- ALL LAMPS SHALL BE HIGH PRESSURE SODIUM UNLESS OTHERWISE NOTED.
- OPERATING VOLTAGE SHALL BE 480 VOLTS FOR ALL LUMINARIES.
- ALL BALLASTS SHALL BE REGULATOR TYPE.
- ALL FUSES AND FUSEHOLDERS SHALL BE IN-LINE TYPE AND WATERPROOF.
- CONDUIT ACCESSORIES, SUCH AS EXPANSION JOINTS, PULLBOXES, CONDULETS, ELBOWS, FLEXIBLE CONDUIT, ETC., SHALL BE INCLUDED IN THE PRICE BID FOR CONDUIT.
- THE CONTRACTOR SHALL INSTALL A NYLON PULL CORD OR GALVANIZED PULL WIRE IN EACH EMPTY CONDUIT. THE COST OF THIS ITEM WILL NOT BE PAID FOR SEPARATELY AND SHALL BE INCLUDED IN THE COST OF THE CONDUIT.
- LIGHTING DESIGN CRITERIA FOR BOTH INTERCHANGES:
LIGHT LOSS FACTOR = 0.7
AVERAGE MAINTAINED ILLUMINATION = 0.9 F.C.
UNIFORMITY RATIO (AVG./MIN.) = 3:1 MAXIMUM
WIND SPEED = 90 M.P.H.
- THE LIGHTING CONTRACTOR SHALL FURNISH A ONE YEAR WRITTEN WARRANTY FOR PARTS AND DEFECTIVE WORKMANSHIP ON THE LUMINAIRES, POLES, LIGHTING CONTROL PANEL AND ALL THE OTHER ELECTRICAL EQUIPMENT.
- THE CONTRACTOR SHALL BEWARE OF OVERHEAD POWER LINES AND LOCATE LIGHTING TOWERS SUCH THAT THEY WILL HAVE 10 FEET MINIMUM CLEARANCE FROM DISTRIBUTION LINES OR 20 FEET MINIMUM CLEARANCE FROM TRANSMISSION LINES.
- PROVIDE PULLBOXES IN THE UNDERGROUND CONDUIT RUNS AS NECESSARY.
- THE CONTRACTOR SHALL CLEAR ALL BRUSH IN A 20' RADIUS AROUND EACH TOWER AND REMOVE THE SPOIL FROM THE SITE.

FOR REVIEW ONLY

© 2011 ATLANTA CONSULTING ENGINEERS, INC. ALL RIGHTS RESERVED.
THESE CONSTRUCTION DOCUMENTS AND PERMITTED REPRODUCTIONS, IN WHOLE OR IN PART, ARE INSTRUMENTS OF SERVICE AND ARE THE SOLE PROPERTY OF ATLANTA CONSULTING ENGINEERS, INC. UNLESS OTHERWISE AGREED TO BY THE USER. THESE DOCUMENTS SHALL NOT BE REPRODUCED OR CONVEYED IN ANY MANNER NOR ARE THEY TO BE USED FOR ANY OTHER PROJECTS OTHER THAN THAT SPECIFICALLY INDICATED HEREIN WITHOUT WRITTEN PERMISSION FROM AND THE COMPENSATION TO ATLANTA CONSULTING ENGINEERS, INC.

ATLANTA CONSULTING ENGINEERS
500 SUN VALLEY DRIVE
UNIT G2
ROSWELL, GEORGIA 30076
balat@atconsgnrs.com
Tel: 678-205-2240
Fax: 678-205-2239

THE LPA GROUP
TRANSPORTATION CONSULTANTS
A UNIT OF MICHAEL BAKER CORPORATION
3585 ENGINEERING DRIVE
NORCROSS, GEORGIA 30092
(770) 263-9118

REVISION DATES

STATE OF GEORGIA
DEPARTMENT OF TRANSPORTATION
OFFICE: INNOVATIVE PROGRAM DELIVERY
LIGHTING PLANS

LIGHTING DETAILS

DRAWING No. 25-001