STATE	PROJECT NUMBER	SHEET NO.	TOTAL SHEETS
GA	0009725	10	334

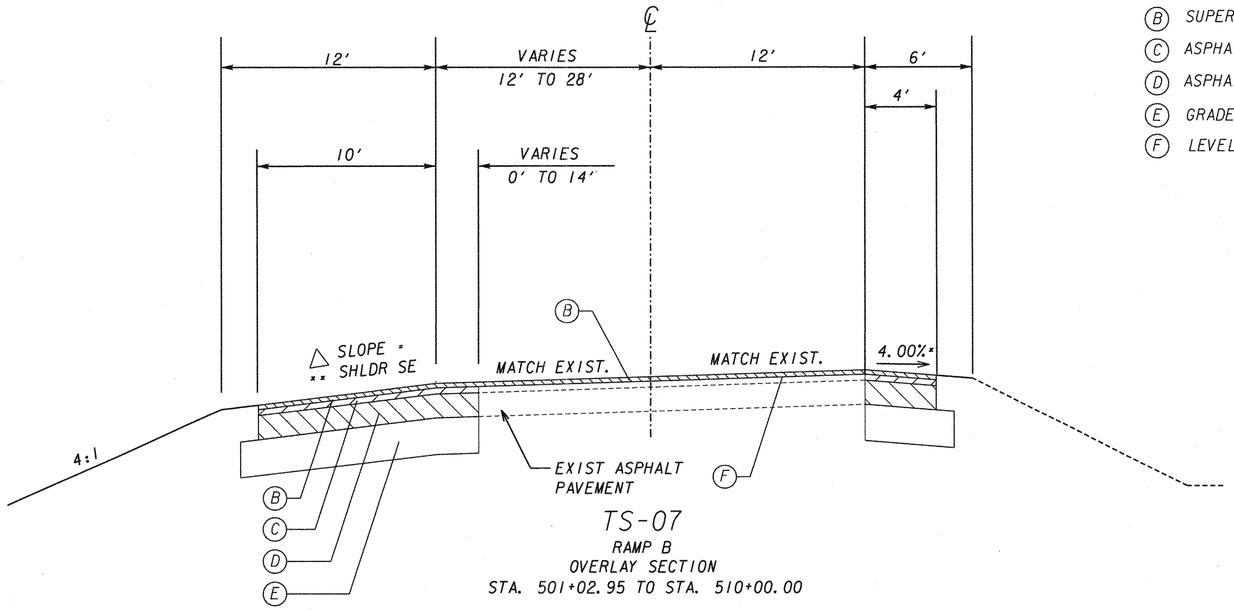

TS-07
RAMP B
OVERLAY SECTION
STA. 501+02.95 TO STA. 510+00.00

(B) SUPERPAVE W/POLYMER MODIFIED AC 12.5MM 165 LBS/SQ. YD
(C) ASPHALTIC CONC SUPERPAVE 19MM, GP1/2 INC BM&HL 220 LBS/SQ. YD
(D) ASPHALTIC CONC SUPERPAVE 25MM, GP1/2 INC BM&HL 660 LBS/SQ. YD
(E) GRADED AGGREGATE BASE 12 INCHES
(F) LEVELING AS REQUIRED

* BREAKOVER RATE NOT TO EXCEED 8%
** RUMBLE STRIPS REQUIRED- SEE DETAIL
△ SLOPE 6% OR RATE OF S.E. WHICHEVER IS GREATER

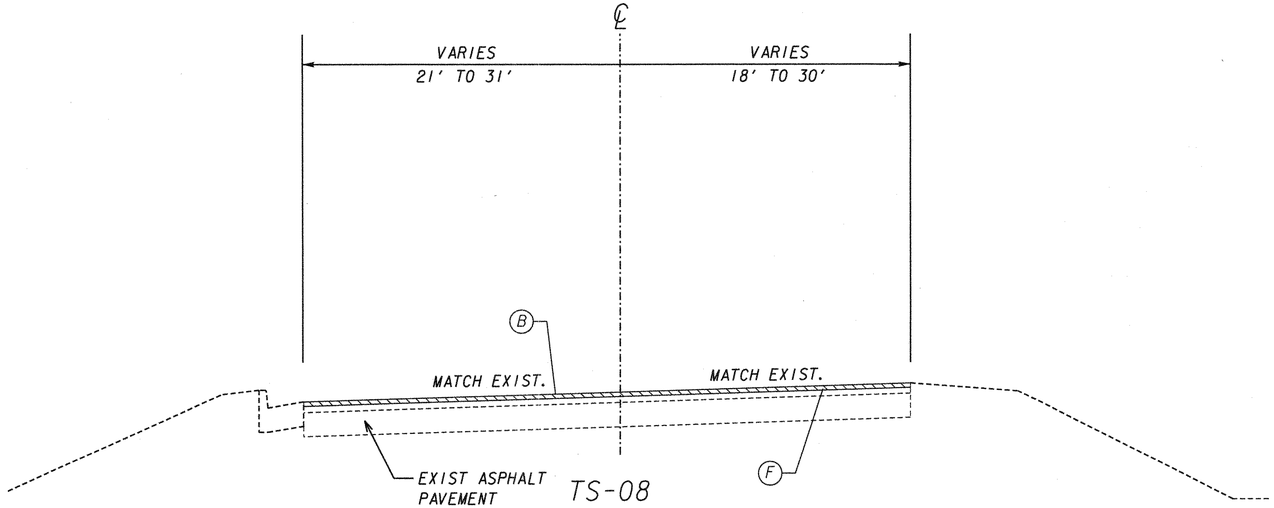

TS-08
RAMP D
OVERLAY SECTION
STA. 700+00.00 TO STA. 705+46.11

SLOPE CONTROLS		
SLOPE	CUT	FILL
4:1	0-6'	0-12'
2:1	OVER 10'	OVER 6'*

ALGEBRAIC DIFFERENCE IN PAVING AND SHOULDER SLOPES NOT TO EXCEED 8.0%

Moreland Altobelli Associates, Inc.
2211 Beaver Ruin Road
Suite 190
Norcross, Georgia 30071
Telephone (770) 263-5945

NOT TO SCALE

REVISION DATES

STATE OF GEORGIA
DEPARTMENT OF TRANSPORTATION
OFFICE: INNOVATIVE PROGRAM DELIVERY

TYPICAL SECTIONS

RAMP B & D

DRAWING No. 5-04

1/5/2009 GPLM

...\HWY\DGN\0009725TYP01.dgn 5/9/2011 9:35:56 AM