




TREE PLANTING
N.T.S.

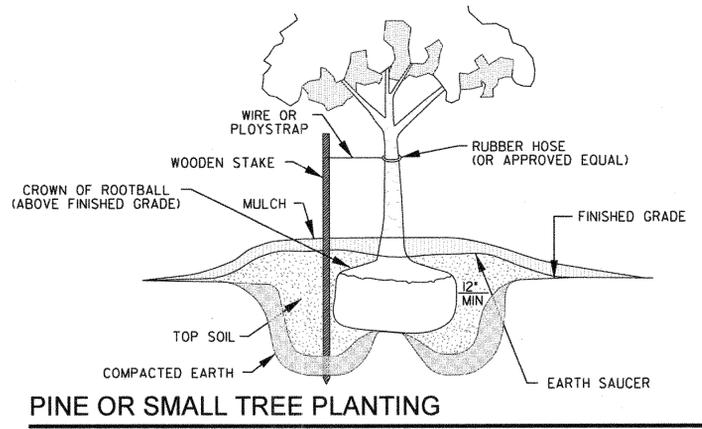


PINE OR SMALL TREE PLANTING
N.T.S.

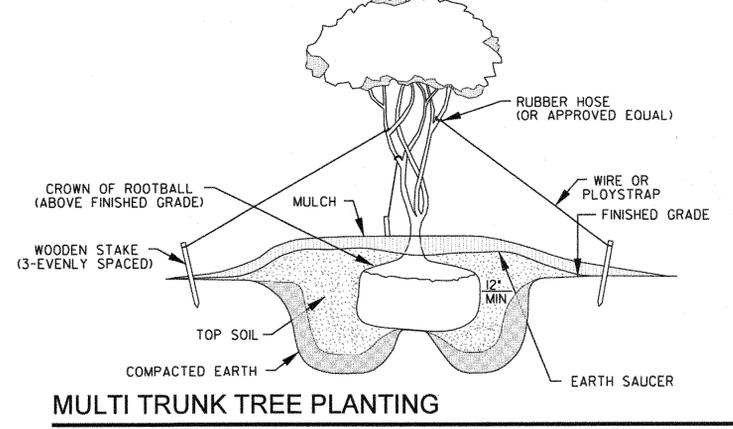


MULTI TRUNK TREE PLANTING
N.T.S.

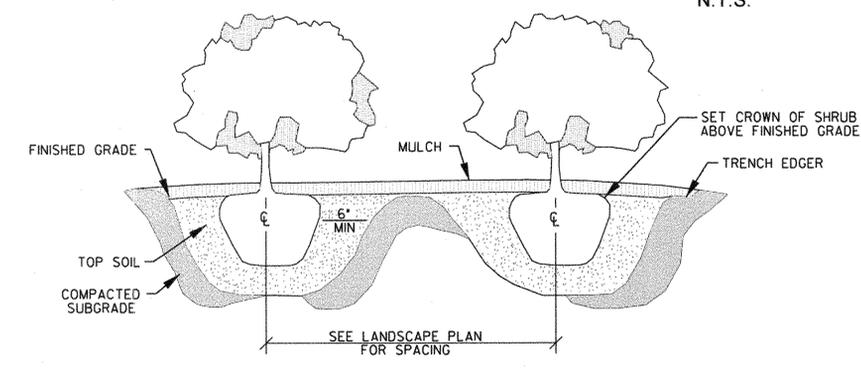

SHRUB PLANTING
N.T.S.

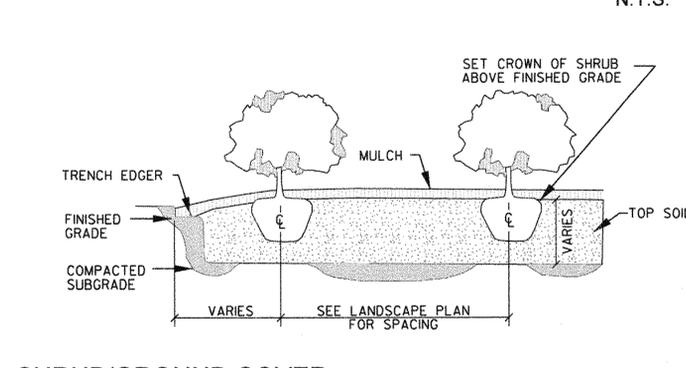

SHRUB/GROUND COVER MASS PLANTING
N.T.S.

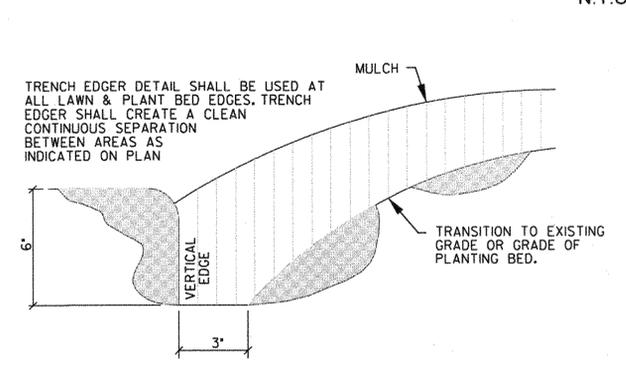

TRENCH EDGER DETAIL
N.T.S.

PLANTING NOTES

SECTION I: GENERAL

CONTRACTOR SHALL BE RESPONSIBLE FOR THE SITE INSPECTION PRIOR TO LANDSCAPE CONSTRUCTION AND INSTALLATION IN ORDER TO ACQUAINT HIMSELF WITH EXISTING CONDITIONS. CONTRACTOR SHALL BE RESPONSIBLE FOR LOCATING ALL EXISTING UNDERGROUND UTILITIES BEFORE BEGINNING CONSTRUCTION. PRIOR TO SUBMITTING A BID, VERIFY ANY DISCREPANCIES BETWEEN THE NOTES, SPECIFICATIONS, DRAWINGS, OR SITE CONDITIONS WITH THE LANDSCAPE ARCHITECT.

CONTRACTOR SHALL COMPLETE SOIL TEST IN ALL PLANTING AREAS TO DETERMINE SOIL AMENDMENT REQUIREMENTS AND SUBMIT TEST RESULTS TO LANDSCAPE ARCHITECT FOR APPROVAL. CONTRACTOR SHALL ADJUST PH AND FERTILITY BASED UPON THESE RESULTS. NO ADDITION TO OR PLACEMENT OF SOIL IS TO BE DONE PRIOR TO INITIAL SOIL TEST REPORT APPROVAL. TESTING SHALL BE DONE BY SUITABLE LABORATORY. NO PLANTING SHALL BEGIN UNTIL RESULTS AND PROPER ADJUSTMENT HAVE BEEN MADE.

CONTRACTOR SHALL LAYOUT TREES AND BED LINES FOR PLANTS FOR REVIEW BY LANDSCAPE ARCHITECT PRIOR TO PLANTING. A MINIMUM 24 HOURS NOTICE SHOULD BE GIVEN AND ANTICIPATED BY THE CONTRACTOR FOR THIS REVIEW.

DUE TO EXISTING VEGETATION AND OTHER SITE CONDITIONS, THE CONTRACTOR SHOULD ANTICIPATE FIELD ADJUSTMENTS BY THE LANDSCAPE ARCHITECT.

SECTION II: MATERIALS

PLANTS SHALL BE WELL FORMED, VIGOROUS, GROWING SPECIMENS WITH GROWTH TYPICAL OR VARIETIES SPECIFIED AND SHALL BE FREE FROM INJURY, INSECTS AND DISEASES. PLANTS SHALL EQUAL OR SURPASS "QUALITY AS DEFINED IN THE CURRENT ISSUE OF 'AMERICAN STANDARDS FOR NURSERY STOCK' AS PUBLISHED BY THE AMERICAN NURSERYMEN, INC.

ALL PLANT MATERIALS ARE SUBJECT TO APPROVAL OR REFUSAL BY THE LANDSCAPE ARCHITECT AT THE JOB SITE. ALL MATERIAL REJECTED SHALL BE REMOVED FROM THE PROJECT SITE AT NO ADDITIONAL COST TO THE OWNER.

ALL PLANT MATERIAL IS TO BE CAREFULLY HANDLED BY THE ROOT BALL, NOT THE TRUNK, BRANCHES, AND/OR FOLIAGE OF THE PLANT. MISHANDLED PLANT MATERIAL MAY BE REJECTED.

ALL PLANT MATERIAL IS TO BE WELL ROOTED, NOT ROOT BOUND, SUCH THAT THE ROOT BALL REMAINS INTACT THROUGHOUT THE PLANTING PROCESS. REJECT ALL CRACKED ROOTBALLS.

SPREAD 6" OF SOIL MIX (70% SCREENED TOPSOIL & 30% COMPOST) OVERALL PLANTING & SOD AREA. TILL TO MINIMUM OF 10".

SECTION III: EXECUTION

ALL TREES SHALL BE STAKED AND GUYED ON THREE SIDES. SEE DETAIL.

BACK ROW OF SHRUBS SHALL BE PLANTED AT 36" FROM FACE OF BUILDING WALL. GROUNDCOVERS SHALL BE 12" OUT FROM BUILDING AS REQUIRED BY PLANT SPECIFICATIONS.

FRONT ROW OF SHRUBS SHALL BE PLANTED A MINIMUM OF 24" BEHIND (12" FOR GROUND COVER) BED LINE @ LAWNS OR WALKS AND MINIMUM 36" BACK FROM DRIVEWAY AND PARKING AREAS.

ALL PLANTING BEDS AND TREE PITS SHALL BE MULCHED WITH A 3" (AFTER SETTLEMENT) LAYER OF PINE STRAW OR MINIPINE BARK NUGGETS.

EXCAVATE EDGE OF ALL PLANTING BEDS TO 2" DEPTH TO FORM A NEAT CRISP DEFINITION. SEE DETAIL.

CONTRACTOR SHALL REMOVE ALL DEBRIS AND FINE GRADE ALL AREAS FOR APPROVAL BY LANDSCAPE ARCHITECT.

REMOVE ALL GUY WIRES AND STAKES AT END OF GUARANTEE PERIOD.

ADDITIONAL NOTES

ALL PROPOSED LANDSCAPE WILL BE MAINTAINED BY A PROFESSIONAL LANDSCAPE MAINTENANCE COMPANY TO BE SELECTED BY OWNER.

MA Moreland Altobelli Associates, Inc.
2211 Beaver Run Road
Suite 190
Norcross, Georgia 30071
Telephone (770) 263-5945

REVISION DATES	

STATE OF GEORGIA
DEPARTMENT OF TRANSPORTATION

OFFICE: **LANDSCAPE DETAILS**

DRAWING No.
29-07