



LIST OF MATERIALS		
	UNIT	QUANTITY
1-SECTION, 18" LED COUNTDOWN PEDESTRIAN SIGNAL HEAD, FULL HAND/MAN OVERLAP		
9" HIGH, NUMBERS & 12" SYMBOLS	EA	2
PEDESTRIAN PUSH STATION ASSEMBLY		
9"X15", W/ DOUBLE PUSH BUTTON STATION ADAPTER FOR 4" DIA PEDESTRIAN POLE, ADJUSTABLE	EA	2
PEDESTRIAN PUSH BUTTON STATIONS, W/ BUTTONS AND SIGNS:		
9"X15", R10-3E, (L)LEFT OR (R)RIGHT, COUNTDOWN	EA	2
HARDWARE FOR PEDESTAL POLE, TOP POST MOUNTING, TWO-WAY BRACKET ASSEMBLY	EA	2
HARDWARE FOR SIDE-OF-POLE MOUNTING, ONE-WAY BRACKET ASSEMBLY	EA	2
PEDESTAL POLE & SQUARE BASE	EA	2
CONDUIT, 2"	LF	150
MISCELLANEOUS MATERIALS NEEDED TO COMPLETE INSTALLATION		
PAY ITEMS		
615-1200 DIRECTIONAL BORE	LF	125
647-1000 TRAFFIC SIGNAL INSTALLATION NO. 1	LS	LUMP
682-6222 CONDUIT, NONMETAL, TP 2, 2 IN	LF	150

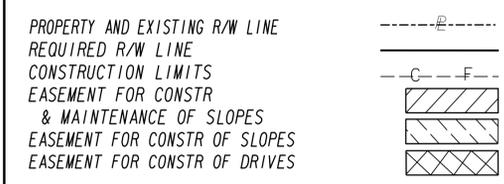

BEGIN LIMIT OF ACCESS.....BLA
 END LIMIT OF ACCESS.....ELA
 LIMIT OF ACCESS
 REQ'D R/W & LIMIT OF ACCESS
 ORANGE BARRIER FENCE

H&L Heath & Lineback Engineers
 INCORPORATED
 2390 CANTON ROAD, BUILDING 200
 MARIETTA, GEORGIA 30066-5393
 (770)424-1668

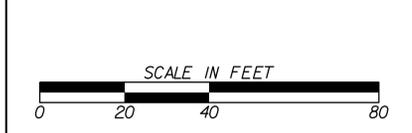

REVISION DATES	

STATE OF GEORGIA
 DEPARTMENT OF TRANSPORTATION
 OFFICE: TRAFFIC OPERATIONS

SIGNAL PLANS
A. L. BURRUSS ELEMENTARY SCHOOL

MARIETTA CITY
 SAFE ROUTES TO SCHOOL

DRAWING No.
27-001