





TYPICAL LOCATIONS IN DITCHES

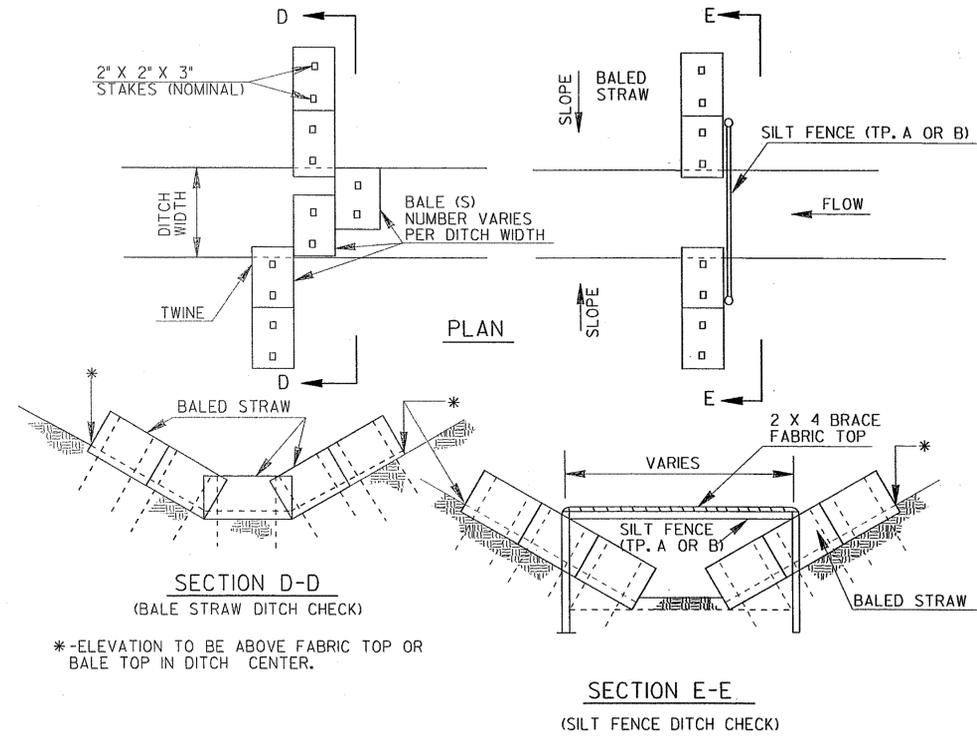

TYPICAL LOCATIONS AT TOE OF SLOPES

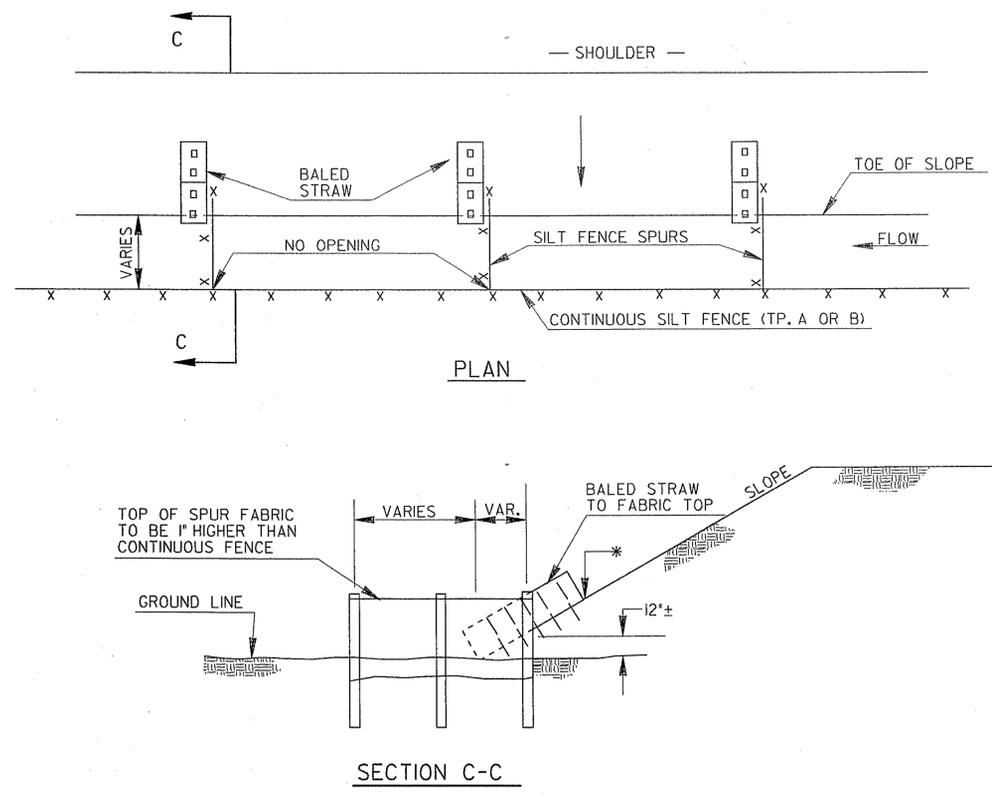


TYPICAL LOCATION AROUND DROP INLETS

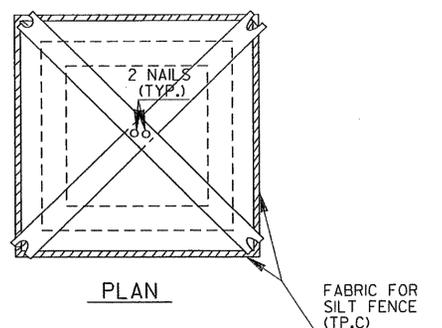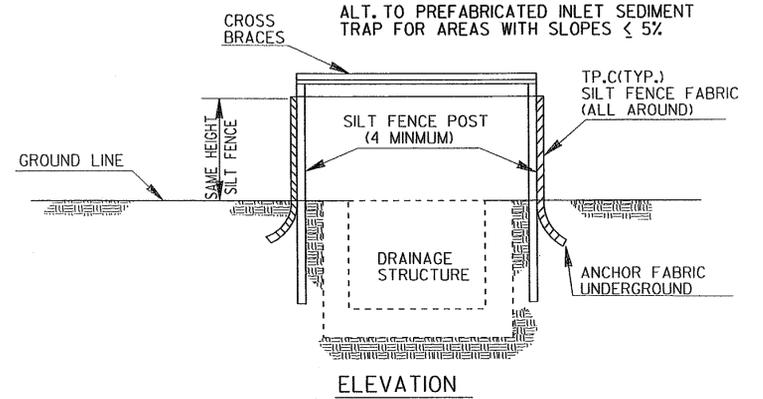


CROSS BRACES:  
TWO - 2 X 4'S WITH ENDS TO FIT POST, PROVIDING STURDY SUPPORT, OR AN APPROVED ALTERNATE

NOTE:  
PAYMENT AS INLET SEDIMENT TRAP PER EACH.

NOTE:  
BALED STRAW DITCH CHECKS ARE FOR USE ON GRADES OF 1 PERCENT OR LESS AT SPACINGS OF 100 FEET + -.

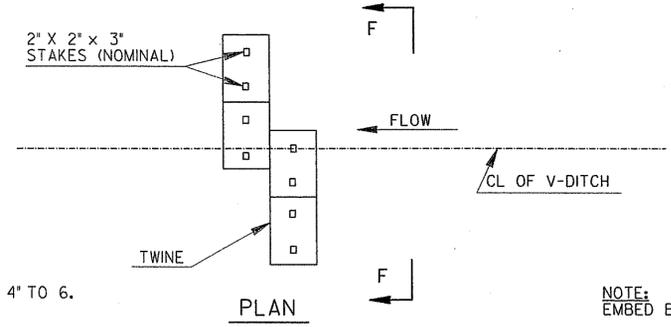


NOTE:  
EMBED BALES 4" TO 6".

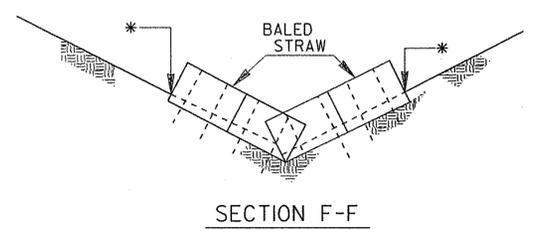



NOTE:  
EMBED BALES 4" TO 6".

GRADE OF DITCH OR SLOPE	TYPE OF SILT FENCE	SPACING (METERS)
LESS THAN 1%	TYPE B	100' +-
1% TO 2%	TYPE A	100' +-
2% TO 3%	TYPE A	50' +-
3% TO 4%	TYPE C	50' +-
4% TO 5%	TYPE C	25' +-

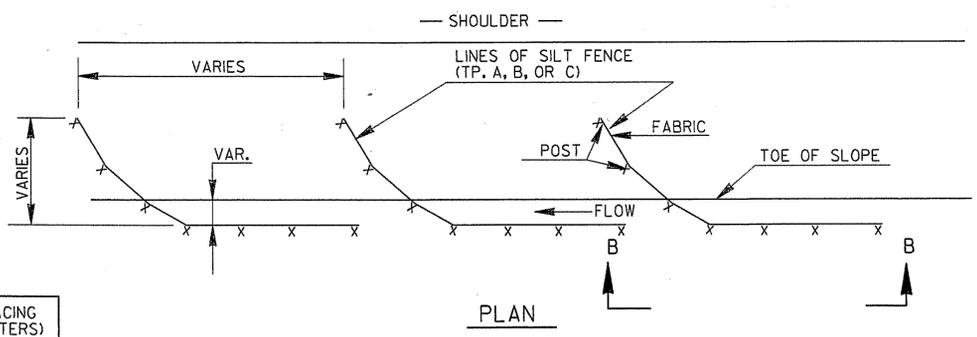


NOTE:

SEE SEPARATE SHEET ENTITLED 'TEMPORARY SILT FENCE, BALED STRAW EROSION CHECK, BRUSH BARRIER DETAILS' FOR BALED STRAW AT TOE OF SLOPE, FOR SILT FENCE ERECTION DETAILS, OR FOR BRUSH BARRIERS, WHERE REQUIRED.

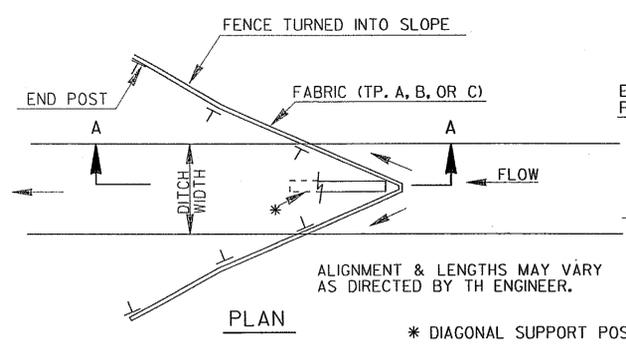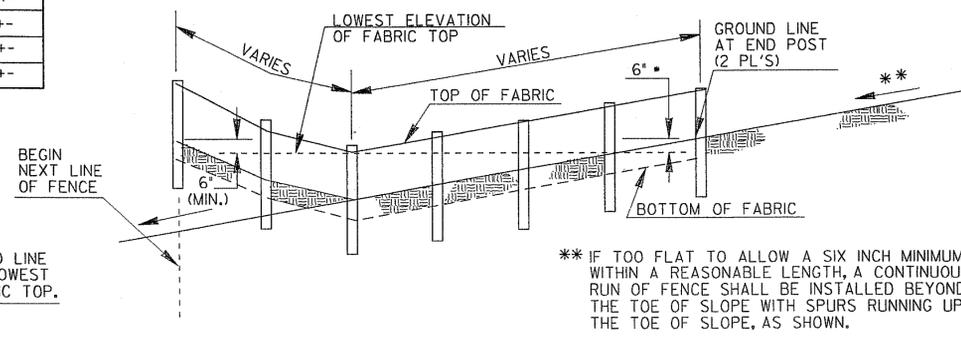

\* DIAGONAL SUPPORT POST

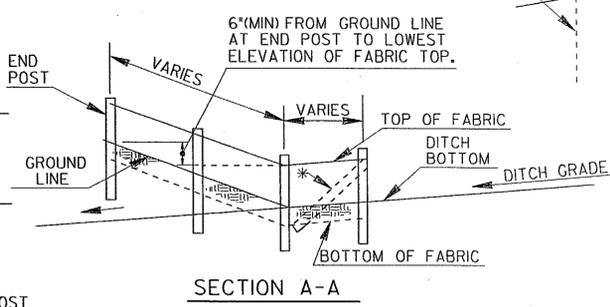

10-22-02	REV. SILT FENCE REQ.	DATE
9-01	REV. & REDR.	DATE
5-14-93	ADD 'USES' GUIDE	DATE
	REVISION	DATE
MGR	BY	
RMU	BY	
J.M.W.	BY	

CONSTRUCTION DETAILS  
TYPICAL LOCATION DETAILS  
FOR SILT FENCES / BALED STRAW

(SHEET 2 OF 2)  
NO SCALE

AUGUST 1989