

NOTES

WELDS-ALL WELDS SHOWN SHALL BE PROPERLY SIZED TO RESIST ANY LOADS APPLIED THROUGH THE BEARINGS AS PER THE AASHTO SPECIFICATIONS.

EXISTING BEARING COMPONENTS - THE CONTRACTOR AND FIELD ENGINEER SHALL INSPECT ALL EXISTING BEARINGS TO IDENTIFY ANY DEFECTIVE BEARING COMPONENTS. IF ANY DEFECTIVE BEARING COMPONENTS ARE FOUND, THEY SHALL BE REPLACED. COMPENSATION FOR ANY REQUIRED BEARING COMPONENT REPLACEMENTS SHALL BE MADE BY MEANS OF A SUPPLEMENTAL AGREEMENT. EXISTING BEARINGS SHALL THEN BE CLEANED AND PAINTED AS PER SECTION 535 OF THE GDOT STANDARD SPECIFICATIONS.

ANCHOR BOLTS-NEW ANCHOR BOLTS SHALL BE SWEDGED WITH SQUARE PLATE WASHERS AND HEX NUTS AND SHALL BE ASTM-A193 TYPE 304 STAINLESS STEEL. SECURE ANCHOR BOLTS IN HOLES WITH AN APPROVED TYPE VIII EPOXY RESIN ADHESIVE.


DRILLED HOLES- REQUIRED HOLES FOR NEW ANCHOR BOLTS SHALL BE 3" DIA. BY 12" DIA DEEP. USE AN IMPACT DRILL FOR DRILLING HOLES IN CONCRETE. DO NOT DAMAGE THE EXISTING CAP MAIN REINFORCING STEEL.

NEW STEEL-ALL NEW BEARING ASSEMBLY COMPONENTS SHALL BE A709 GR 36 STEEL UNLESS OTHERWISE NOTED AND SHALL BE CLEANED AND PAINTED IN ACCORDANCE WITH SECTION 535 OF THE GDOT STANDARD SPECIFICATIONS.

ELASTOMERIC PADS-PROVIDE ELASTOMERIC PADS BETWEEN TOP OF CAP AND BEARING ASSEMBLY IN LIEU OF RED PRIMER-SATURATED DUCK AS SPECIFIED IN SECTION 501.03.05 ELASTOMERIC PADS SHALL BE MADE OF 60 DUROMETER HARDNESS NEOPRENE WITH TWO 1/16" DIAMETER HOLES FOR ANCHOR BOLTS.


COST OF MATERIALS-COST OF CLEANING AND PAINTING BEARINGS, FURNISHING AND INSTALLING PLATES, PEDESTALS, ANCHOR BOLTS, ELASTOMERIC PADS AND ANY OTHER MATERIALS NECESSARY TO COMPLETE THE WORK SHALL BE INCLUDED IN THE PRICE BID FOR ITEM 518-RAISE EXISTING BRIDGE.

BEARING ASSEMBLY STUDS - THE REQUIRED STUDS SHALL BE PLACED IN THE EXISTING BASE PLATE ANCHOR BOLT HOLES AND WELDED AS SHOWN. COUNTERSINK THE BOTTOM OF THE EXISTING HOLES IN THE BASE PLATE TO PROVIDE THE BEVEL REQUIRED FOR WELDING THE STUDS IN PLACE. THE BOTTOM OF THE BASE PLATE SHALL BE GROUND SMOOTH AT THE LOCATION OF THESE WELDS PRIOR TO THE INSTALLATION OF THE PEDESTAL.

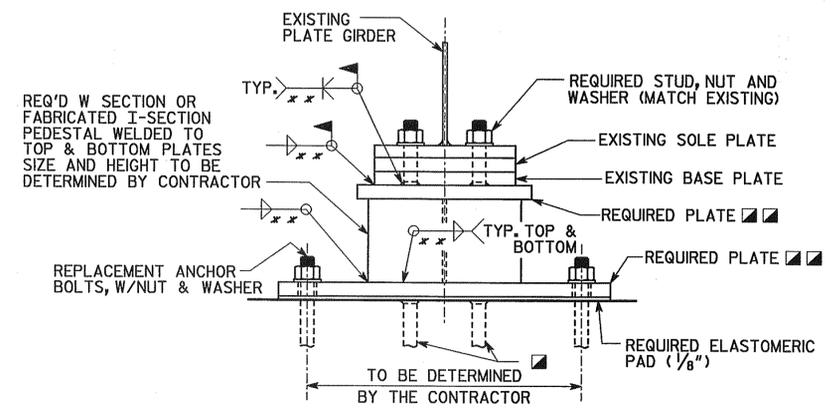


PEDESTAL/BEARING ASSEMBLY SCHEMATIC
(ABUTMENTS 1 AND 5)

- CHIP CONCRETE AROUND EXISTING ANCHOR BOLTS TO 3/16" BELOW TOP OF CAP, CUT ANCHOR BOLTS AND FILL HOLE WITH EPOXY BONDING COMPOUND
- ** SIZE TO BE DETERMINED BY THE CONTRACTOR
- SEE NOTES

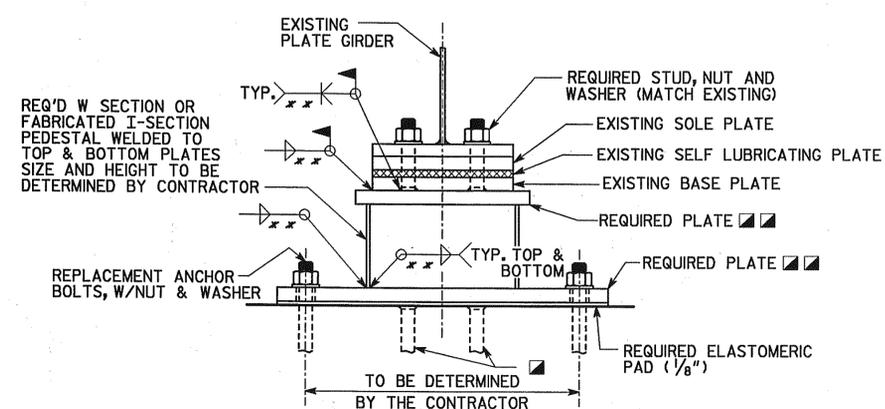


PEDESTAL/BEARING ASSEMBLY SCHEMATIC
(BENTS 2 BK AND 4 AH)

- CHIP CONCRETE AROUND EXISTING ANCHOR BOLTS TO 3/16" BELOW TOP OF CAP, CUT ANCHOR BOLTS AND FILL HOLE WITH EPOXY BONDING COMPOUND
- ** SIZE TO BE DETERMINED BY THE CONTRACTOR
- SEE NOTES

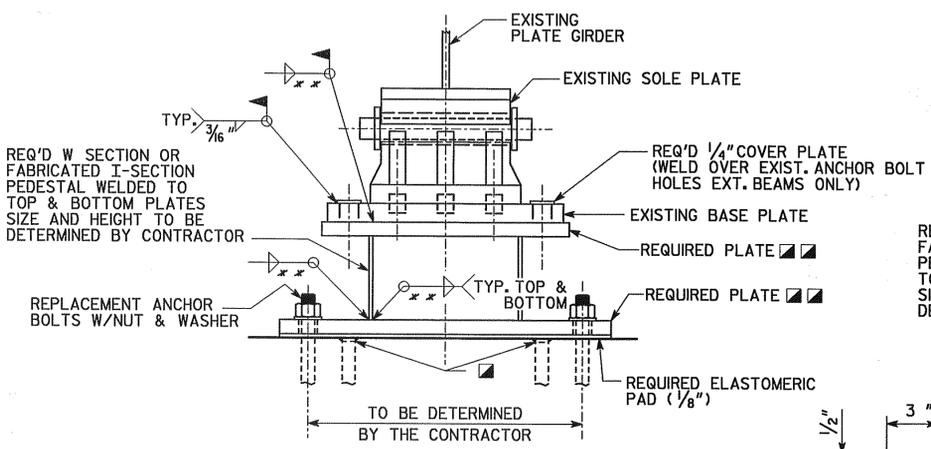


PEDESTAL/ROCKER BEARING ASSEMBLY SCHEMATIC
(BENTS 2 AH AND 4 BK)

- CHIP CONCRETE AROUND EXISTING ANCHOR BOLTS TO 3/16" BELOW TOP OF CAP, CUT ANCHOR BOLTS AND FILL HOLE WITH EPOXY BONDING COMPOUND
- ** SIZE TO BE DETERMINED BY THE CONTRACTOR
- SEE NOTES

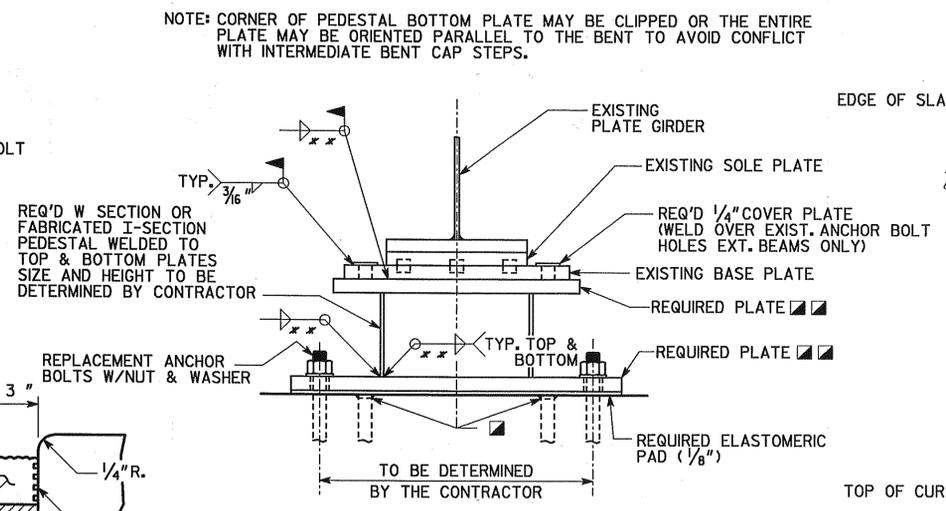


PEDESTAL/BEARING ASSEMBLY SCHEMATIC
(BENT 3)

- CHIP CONCRETE AROUND EXISTING ANCHOR BOLTS TO 3/16" BELOW TOP OF CAP, CUT ANCHOR BOLTS AND FILL HOLE WITH EPOXY BONDING COMPOUND
- ** SIZE TO BE DETERMINED BY THE CONTRACTOR
- SEE NOTES

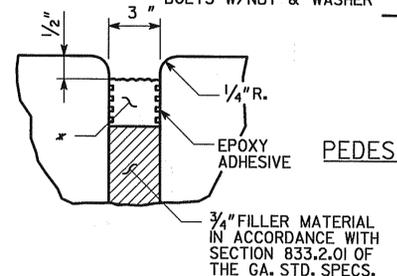


3" EXPANSION JOINT DETAIL
(BENTS 2 AND 4)

* SEAL PER SECTION 449.2.D OF THE GA. STD. SPECS.

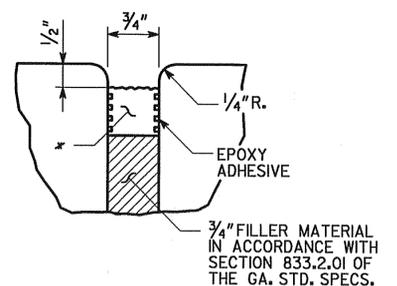

3/4" EXPANSION JOINT DETAIL
(BENTS 1 AND 5)


* SEAL PER SECTION 449.2.D OF THE GA. STD. SPECS.

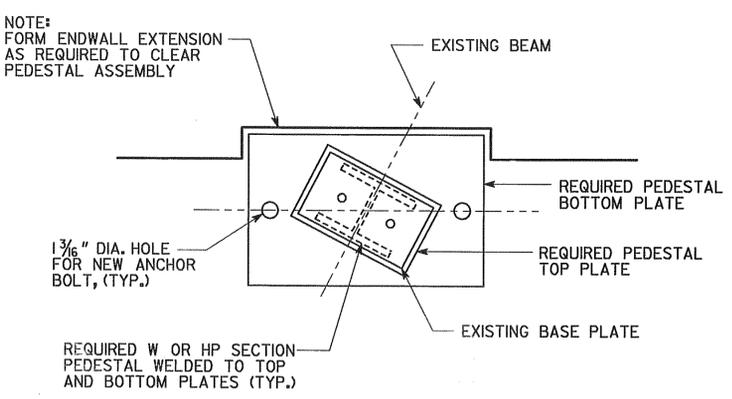

PLAN SCHEMATIC (END BENTS ONLY)


JT. PLAN DIM.*	DIM. @ 30°F	DIM. @ 90°F
3"	3 3/8"	2 9/8"

* DENOTES: JOINT DIMENSION AT 60°F

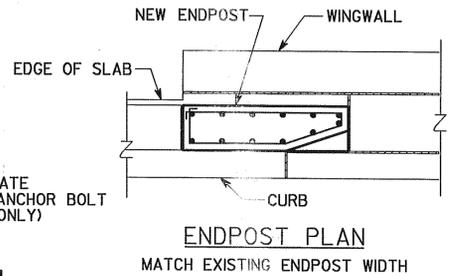


ENDPOST PLAN

MATCH EXISTING ENDPOST WIDTH

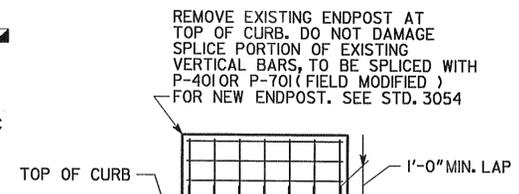


ENDPOST ELEVATION

NOTE: ALL CONCRETE SHALL BE 24 HR. ACCELERATED STRENGTH CONCRETE AS PER SECTION 504 OF THE GEORGIA DOT STANDARD SPECIFICATIONS. COST OF REINFORCING TO BE INCLUDED IN THE PRICE BID FOR ITEM 504-0600-24 HR. ACCELERATED STRENGTH CONCRETE.

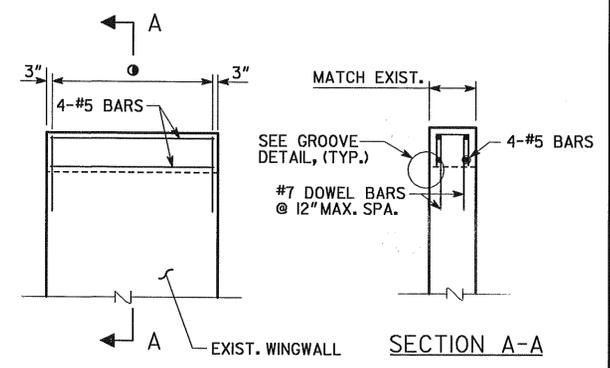

WINGWALL ELEVATION

● #7 DOWEL BAR @ 12" MAX. S/W #5 I BAR

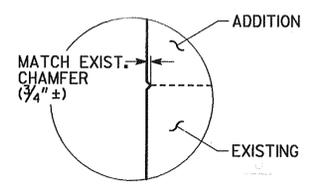

GROOVE DETAIL



BRIDGE NO. 2							
GEORGIA DEPARTMENT OF TRANSPORTATION PRECONSTRUCTION DIVISION-OFFICE OF BRIDGE DESIGN							
JACKING DETAILS CASSVILLE WHITE ROAD OVER I-75 BARTOW CO. NHS-M001-00(996)							
SCALE: NONE	JANUARY 2004						
BRIDGE SHEET 3 OF 3	<table border="1"> <tr> <td>DESIGNED: LWD</td> <td>CHECKED: RDB</td> <td>REVIEWED: X</td> </tr> <tr> <td>DRAWN: RCP</td> <td>DESIGN GROUP: X</td> <td>APPROVED: X</td> </tr> </table>	DESIGNED: LWD	CHECKED: RDB	REVIEWED: X	DRAWN: RCP	DESIGN GROUP: X	APPROVED: X
DESIGNED: LWD	CHECKED: RDB	REVIEWED: X					
DRAWN: RCP	DESIGN GROUP: X	APPROVED: X					