STATE	PROJECT NUMBER	SHEET NO.	TOTAL SHEETS
GA	APD00-0056-01(063)	31	406

DETAILS OF OVERHEAD STREET NAME SIGNS



3" Radius, 1" Border, White on Green;
"SR 400" D Georgia;

D3-1 #1

2 EA REQD



3" Radius, 1" Border, White on Green;
"SR 53" D Georgia;

D3-1 #2

6 EA REQD



3" Radius, 1" Border, White on Green;
"Lumpkin Campground Rd" B 15% spacing;

D3-1 #3

2 EA REQD

MOUNTING DIMENSIONS			
H	A	B	C
12"	9"	1½"	36"
18"	15"	1½"	24"
24"	18"	1½"	18"
30"	24"	3"	12"



FOR MOUNTING TO
MAST ARMS STRUCTURES.

(NOT TO SCALE)

NOTE: USE ASTRO MINI SIGN BRAC
AND CLAMP OR EQUIVALENT

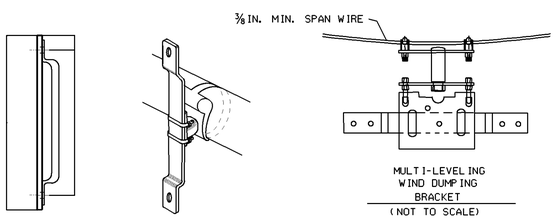

MULTI-LEVELING
WIND DUMPING
BRACKET

(NOT TO SCALE)

GENERAL NOTES:

1. EACH SIGN SHALL CONTAIN A MINIMUM OF TWO (2) HANGERS OR BRACKETS.
2. SIGN LEGEND SHALL BE 8-IN. UPPER CASE & 6-IN. LOWER CASE SERIES "D" LETTERS
   ALL ARROWS SHALL BE 6-IN. TALL & 9-IN. LONG
3. EACH SIGN SHALL CONTAIN 1/2-IN BORDERS AND 1 1/2-IN RADII.
4. EACH SIGN SHALL BE MADE OF ONE CONTINUOUS PIECE OF ALUMINUM.
5. SIGNS SHALL HAVE STANDARD REFLECTORIZED INTERSTATE GREEN BACKGROUND
   WITH WHITE REFLECTORIZED LEGENDS, BORDERS AND ARROWS.

SUMMARY OF QUANTITIES FOR OVERHEAD STREET NAME SIGNS

SIGNS - TYPE 2 MAT'L, REFL SHEETING TYPE 9

LOCATION	CODE	SIZE	QUANTITY	SQUARE FEET
SR 400 @ SR 53				
SR 400	D3-1 #1	78" X 24"	2	26
SR 53	D3-1 #2	66" X 24"	2	22
SR 53 @ LUMPKIN CAMPGROUND RD				
SR 53	D3-1 #2	66" X 24"	2	22
LUMPKIN CAMPGROUND RD	D3-1 #3	120" X 24"	2	40
SR 53 @ KROGER DRIVEWAY				
SR 53	D3-1 #2	66" X 24"	2	22
TOTAL			10	132.00

GEORGIA
DEPARTMENT
OF
TRANSPORTATION

REVISION DATES
10/14/14

STATE OF GEORGIA
DEPARTMENT OF TRANSPORTATION
OFFICE: ROADWAY DESIGN

SIGNAL PLANS

SUMMARY QUANTITIES

OVERHEAD STREET NAME SIGNS
MOUNTED ON TRAFFIC SIGNAL SPAN WIRES

DRAWING No. 06 -014

GPLN