


EARTH SHOULDER FILLING

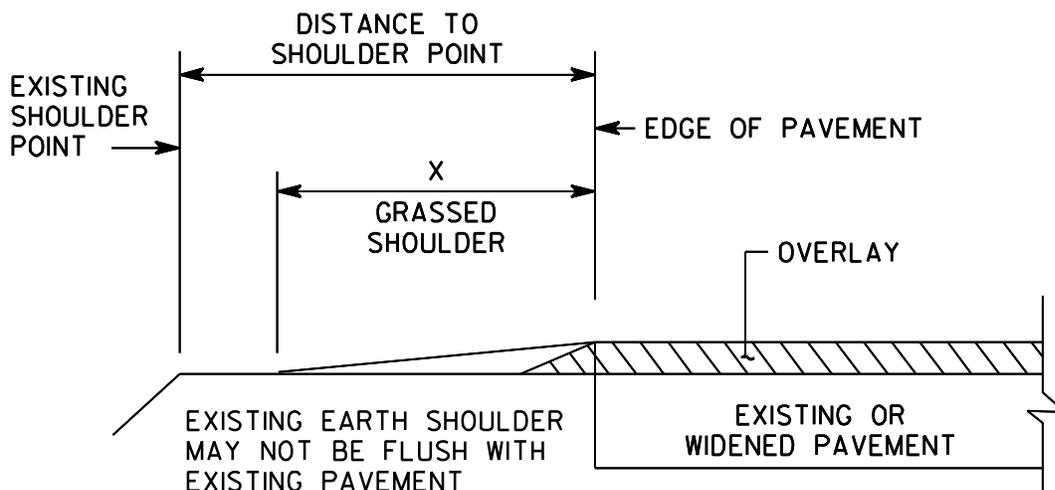

X = 4'-0" OR DISTANCE TO SHOULDER POINT,
WHICHEVER IS THE LESSER WITH A MINIMUM
OF 1'-0" REQUIRED AT ALL LOCATIONS

TYPICAL SECTION

SHOULDER FILLING
NOT TO SCALE

THIS TYPICAL SECTION APPLIES FROM
LOG 0.000 TO LOG 4.597 (LT & RT)
LOG 4.597 TO LOG 5.261 (LT)
LOG 5.261 TO LOG 8.904 (LT & RT)
LOG 9.113 TO LOG 9.141 (RT)
LOG 9.141 TO LOG 14.259 (LT & RT)
LOG 14.928 TO LOG 21.830 (LT & RT)
LOG 21.830 TO LOG 21.877 (LT)
LOG 21.877 TO LOG 22.541 (LT & RT)

(EXCEPT FOR ROADWAY AND BRIDGE RESURFACING EXCEPTIONS SHOWN IN LOG TO LOG SHEETS)

- (1) FILL EXISTING EARTH SHOULDER AT VARIABLE DEPTH AS REQUIRED TO PROVIDE A SMOOTH GRADE FROM THE NEW EDGE OF PAVEMENT ELEVATION TYING INTO EXISTING EARTH SHOULDER.
- (2) ALL GRADING, INCLUDING ANY BORROW MATERIAL, SHALL BE INCLUDED IN PRICE BID FOR GRADING PER MILE.