


DETAIL FOR ASPHALT SHOULDER WIDENING AND RESURFACING

TYPICAL SECTION

THIS TYPICAL SECTION APPLIES FROM LOG 0.000 TO LOG 0.019  
FROM LOG 4.862 TO LOG 4.881

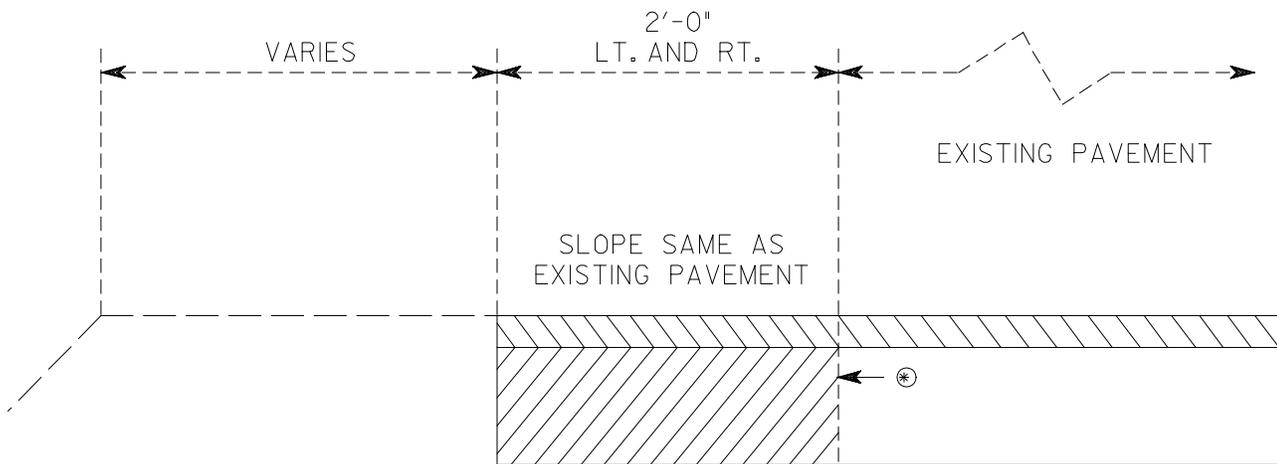

⊛ THE CONTRACTOR SHALL CLEAN AND TACK THE FACE OF THE EXISTING PAVEMENT PRIOR TO PLACING BASE MATERIAL.

-  = 135 LBS PER SQUARE YARD RECYCLED ASPHALTIC CONCRETE 9.5 mm SUPERPAVE, TYPE II, BLEND I, INCL BITUM MATL & H LIME
-  = 440 LBS PER SQUARE YARD RECYCLED ASPHALTIC CONCRETE 19 mm SUPERPAVE, GP 1 OR 2, INCL BITUM MATL & H LIME