

REQUIRED ROADWAY PAVEMENT


- (E) RECYCLED ASPH CONC LEVELING, INCL BITUM MATL & H LIME (VARIABLE)
- (K) CONT REINF CONC PVMT, CL 3 CONC, 12 INCH THK
- (I) INDENTATION RUMBLE STRIPS - GROUND-IN-PLACE (CONTINUOUS)
- (L) PLAIN PC CONC PVMT, CL 3 CONC, 12 INCH THK

NOTE: LANE 2 IS JOINTED CONCRETE PAVING

STAGE 3 CONSTRUCTION
STA 931+84.00 LT TO STA 932+84.00 LT
SEE PLANS FOR DETAILS

STAGE 4 CONSTRUCTION
STA 931+84.00 LT TO STA 932+84.00 LT
SEE PLANS FOR DETAILS

⊗⊗ CONSTRUCT GLARE SCREEN ON MEDIAN BARRIER

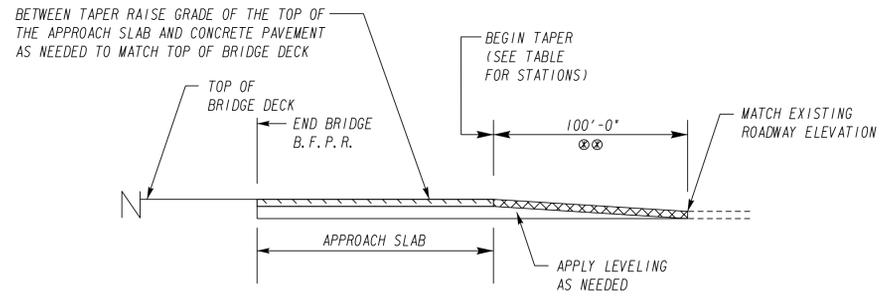

⊗⊗ THESE TRANSITION ZONES SHALL BE EXEMPT FROM THE PROFILOGRAPH REQUIREMENTS OF SECTION 500.3.06.E OF THE STANDARD SPECIFICATIONS

STATION TAPER TABLE	
S. B. BRIDGE	BEGIN TAPER STA 931+84.00
	END TAPER STA 932+84.00

LONGITUDINAL SECTION
(ROADWAY TRANSITION DETAIL)

NOTES:

- REMOVE THE EXISTING APPROACH SLAB AND RECONSTRUCT.
- PLACE ADDITIONAL APPROACH SLAB SUBBASE TO ADJUST ELEVATION TO MATCH PROPOSED DECK ELEVATION.
- COST SHALL BE INCLUDED IN THE PRICE BID FOR GRADING COMPLETE.
- SEE BRIDGE PLANS FOR ADDITIONAL DETAILS.

HL Heath & Lineback Engineers
INCORPORATED
2390 CANTON ROAD, BUILDING 200
MARIETTA, GEORGIA 30066-5393
(770)424-1668

NOT TO SCALE

REVISION DATES

10-31-13		

STATE OF GEORGIA
DEPARTMENT OF TRANSPORTATION
OFFICE: BRIDGES AND STRUCTURES
STAGING TYPICAL SECTIONS

1-85 OVER TRANSCONTINENTAL GAS LINE

DRAWING No.
05-002