6/25/2015 10:31:03 AM \\GDOT-DSN1\GOPLDT\QCF\QCC_qcf_bqupdtes_P:\Policy&Lighting\Standards\GA Details\T-15A\Revision_2015-6-2\T-15A_Revised_2015-6-4.prf

STATE	PROJECT NUMBER	SHEET NO.	TOTAL SHEETS
GA.	0012722		

DIVIDED / UNDIVIDED HIGHWAY

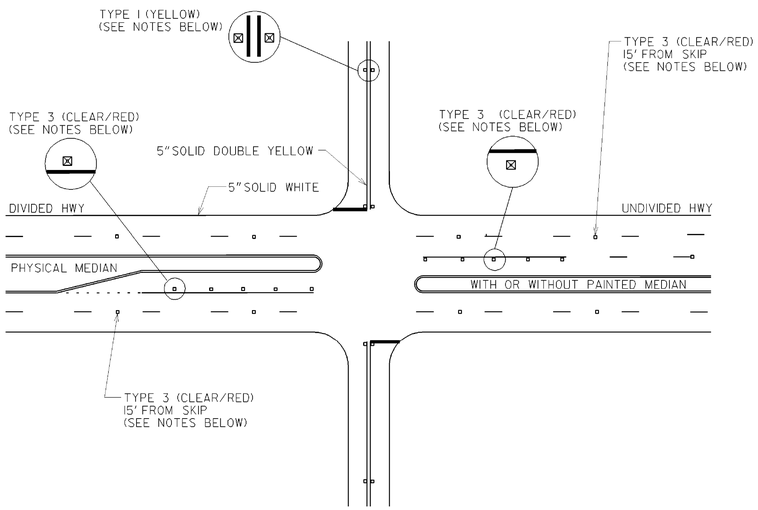

REVERSIBLE LANE



TWO WAY LEFT TURN LANE

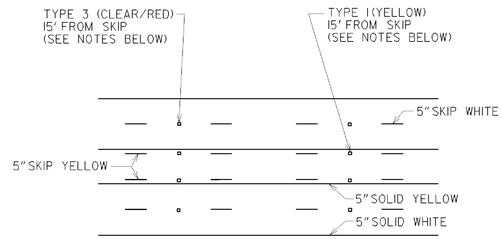

4'-0" STRIPED FLUSH MEDIAN

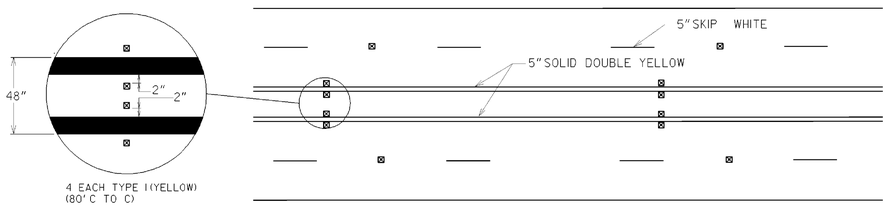

NO PASSING ZONE

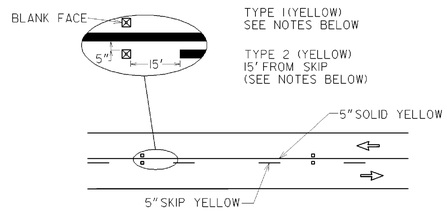

GENERAL NOTES:

1. RAISED PAVEMENT MARKERS SHALL BE SPACED EVERY 80 FT UNLESS OTHERWISE SPECIFIED.
2. ON SOLID WHITE TURN BAY LINES, SPACING SHALL BE 20 FT.
3. RAISED PAVEMENT MARKERS SHALL BE OFFSET 5 INCHES FROM SOLID LANE LINES.
4. CLEAR FACE OF TYPE 3 RAISED PAVEMENT MARKERS SHALL BE ORIENTED TOWARD ONCOMING TRAFFIC.
5. ON HORIZONTAL CURVES WHERE AT LEAST 3 MARKERS CANNOT BE SEEN AT ONE TIME USING NORMAL SPACING, MARKERS SHALL BE PLACED 40 FT.

TYPICAL RPM/STRIPE SPACING

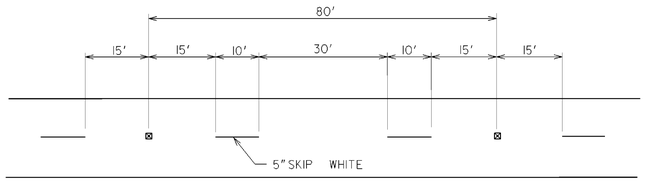

DATE	REVISION	BY

DEPARTMENT OF TRANSPORTATION
STATE OF GEORGIA

CONSTRUCTION DETAILS

RAISED PAVEMENT MARKER LOCATION
NON-LIMITED ACCESS ROADWAY

NO SCALE — REV. AND REDRAWN, JUNE 2015

DRAWING No. 40-0032

DESIGNED
DRAWN
TRACED
CHECKED

NUMBER T-15A

6/25/2015 10:31:03 AM \\GDOT-DSN1\GOPLDT\QCF\QCC_qcf_bqupdtes_P:\Policy&Lighting\Standards\GA Details\T-15A\Revision_2015-6-2\T-15A_Revised_2015-6-4.prf
0012722_40.dgn 5/9/2016 8:45:28 AM