


ELEVATION

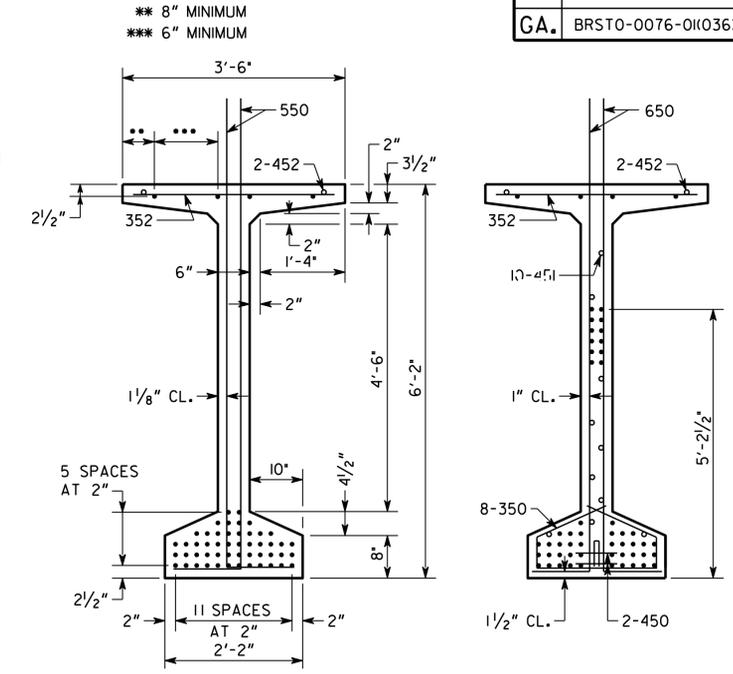


SECTION AT MIDPOINT SECTION AT END

 MAINTAIN 1" MINIMUM CLEARANCE UNLESS SHOWN.
 • INDICATES 0.6" DIAMETER PRESTRESSED STRANDS.


NOTES

- BEAMS SHALL BE MAINTAINED IN AN UPRIGHT POSITION AT ALL TIMES AND SHALL BE PICKED UP WITHIN 9'-0" FROM THEIR ENDS. DISREGARDING THIS REQUIREMENT COULD LEAD TO COLLAPSE OF THE BEAM. PICK-UPS SHALL BE EMBEDDED TO WITHIN 4" OF THE BOTTOM OF THE BEAM. DETAILS OF PICK-UPS SHALL BE INCLUDED IN THE SHOP DRAWINGS.
- CHAMFER EDGES OF BEAMS 1/2", 3/4" OR 1".
- HORIZONTAL DIMENSIONS ARE IN PLACE DIMENSIONS. THE BEAM LENGTH INCLUDES THE 1/8" EPOXY MORTAR AT EACH END. SHOP DRAWINGS SHALL ADJUST HORIZONTAL DIMENSIONS FOR GRADE AND FABRICATION EFFECTS SUCH AS SHRINKAGE AND ELASTIC SHORTENING.
- AT \bar{C} BEARING, FORM A 1 3/4" DIAMETER X 7" DEEP HOLE AT THE FIXED ENDS AND A 6" X 1 3/4" X 7" DEEP SLOT AT THE EXPANSION ENDS FOR A 1 1/2" DIAMETER SMOOTH DOWEL. SEE PLAN AND ELEVATION SHEET FOR LOCATION OF FIXED AND EXPANSION ENDS.
- TOPS OF BEAMS SHALL BE ROUGH FLOATED AT APPROXIMATELY THE TIME OF INITIAL SET. ENTIRE TOP SHALL BE SCRUBBED TRANSVERSELY WITH A COARSE BRUSH TO REMOVE ALL LAITANCE AND TO PRODUCE A ROUGHENED SURFACE FOR BONDING TO THE SLAB. ROUGHENED SURFACE SHALL HAVE AN AMPLITUDE OF APPROXIMATELY 1/4". CONCRETE FINS OR PROJECTIONS SHALL BE REMOVED TO PRODUCE A VERTICAL FACE AT THE EDGE OF THE BEAM.
- NON-COMPOSITE DEAD LOAD DEFLECTION (Δ_{NC}) AT THE MIDPOINT IS DUE TO THE WEIGHT OF THE SLAB AND COPING.
- COMPOSITE DEAD LOAD DEFLECTION (Δ_C) AT THE MIDPOINT IS DUE TO THE WEIGHT OF BARRIER.
- STRANDS SHALL MEET ALL REQUIREMENTS OF ASTM A 416 GRADE 270.
- PRESTRESSING DATA IS AS FOLLOWS:
 - USE 54 - 0.6" DIAMETER LOW-RELAXATION ($A = 0.217$ SQ IN) STRANDS. PRETENSION TOP FOUR (4) STRANDS TO 10,000 LBS EACH. PRETENSION BOTTOM STRANDS TO 43,943 LBS EACH.
 - PRETENSIONED STRANDS SHALL BE RELEASED AFTER THE CONCRETE HAS REACHED A MINIMUM STRENGTH (f'_c) OF 7,500 PSI.
 - INCLUDING THE TOP STRANDS, THE TOTAL JACKING FORCE OF PRETENSIONING IS 2,237,150 LBS.
 - INCLUDING THE TOP STRANDS, THE NET PRESTRESSING FORCE OF THE STRANDS AFTER ALL LOSSES IS 1,586,787 LBS.
- CONCRETE STRENGTH (f'_c) = 8,500 PSI.
- ALLOWABLE TENSION = 553 PSI.

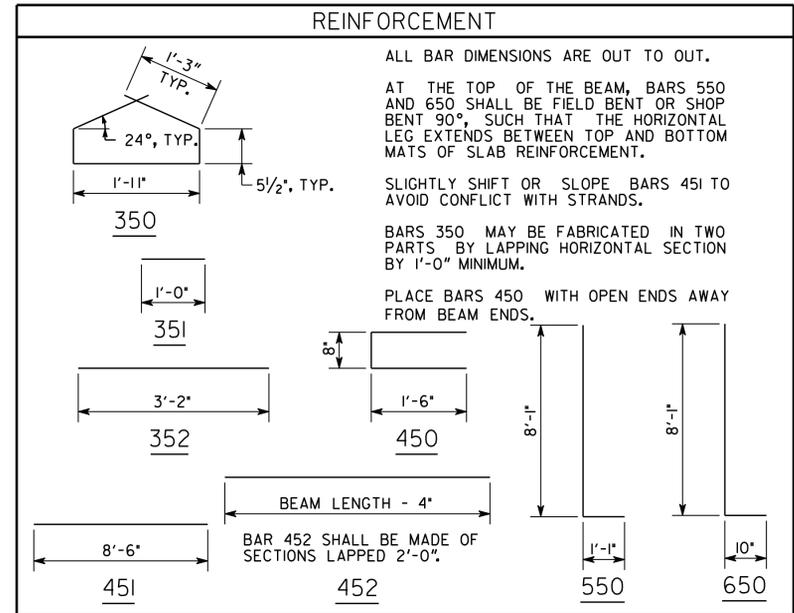

REINFORCEMENT

TABLE OF DIMENSIONS											
SPAN NO.	BEAM NO.	A	B	C	D	E	F	G	H	X	Y
4-6	1	137'-3 3/16"	136'-7 3/16"	135'-3 3/16"	4"	4"	1'-0"	1'-0"	68'-3 3/16"	4 1/16"	6"
	2	137'-7 3/4"	136'-11 3/4"	135'-7 3/4"	4"	4"	1'-0"	1'-0"	68'-5 7/8"	6 7/8"	6"
	3	137'-11 7/8"	137'-3 7/8"	135'-11 7/8"	4"	4"	1'-0"	1'-0"	68'-7 1/2"	8 1/2"	6"
	4	138'-4 1/16"	137'-8 1/16"	136'-4 1/16"	4"	4"	1'-0"	1'-0"	68'-10 1/16"	7 1/16"	10"
	5	138'-8 1/4"	138'-0 1/4"	136'-8 1/4"	4"	4"	1'-0"	1'-0"	69'-0 1/8"	9 7/8"	10"
7	1	137'-6 7/8"	136'-10 7/8"	135'-6 7/8"	4"	4"	1'-0"	1'-0"	68'-5 1/16"	6 1/16"	6"
	2	137'-9 3/8"	137'-1 3/8"	135'-9 3/8"	4"	4"	1'-0"	1'-0"	68'-6 1/16"	7 1/16"	6"
	3	137'-11 1/16"	137'-3 1/16"	135'-11 1/16"	4"	4"	1'-0"	1'-0"	68'-8"	9"	6"
	4	138'-2 1/2"	137'-6 1/2"	136'-2 1/2"	4"	4"	1'-0"	1'-0"	68'-9 1/4"	7 1/4"	9"
	5	138'-5 1/16"	137'-9 1/16"	136'-5 1/16"	4"	4"	1'-0"	1'-0"	68'-10 3/16"	8 3/16"	9"

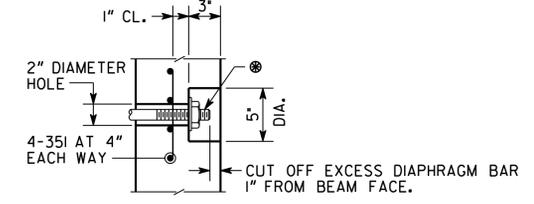

DIAPHRAGM BAR SHALL BE A 1" DIAMETER PLAIN BAR, THREADED 5" ON EACH END, WITH 1/4" X 3/2" DIAMETER WASHERS AND HEX NUTS (ASTM A 709 GRADE 36). DIAPHRAGM BAR SHALL BE TIGHTENED AS PER SUB-SECTION 507.3.05.C OF THE GEORGIA DOT SPECIFICATIONS. AFTER EXCESS DIAPHRAGM BAR HAS BEEN CUT OFF, END OF DIAPHRAGM BAR, WASHER, AND NUT EXPOSED IN RECESS SHALL BE PAINTED WITH SPECIAL PROTECTIVE COATING NO. 2 P AS PER SECTION 535 OF THE GEORGIA DOT SPECIFICATIONS. AFTER PAINTING, THE RECESS SHALL BE FILLED WITH AN APPROVED EPOXY GROUT. GALVANIZING OF DIAPHRAGM BAR AS PER SUB-SECTION 865.2.01.BJ2 OF THE GEORGIA DOT SPECIFICATIONS IS NOT REQUIRED.

RECESS DETAIL FOR DIAPHRAGM BAR ENDS

BRIDGE NO. 1

		MICHAEL BAKER CORPORATION 3595 ENGINEERING DRIVE NORCROSS, GEORGIA 30092 (770) 263-9118	
		GEORGIA DEPARTMENT OF TRANSPORTATION ENGINEERING DIVISION-OFFICE OF BRIDGES AND STRUCTURES	
BULB TEE, 74 IN PSC BEAM - SPAN 4-7 S.R. 47 OVER LITTLE RIVER (CLARKS HILL LAKE) LINCOLN/COLUMBIA COUNTY BRSTO-0076-01(036)			
SCALE: NONE		NOVEMBER 2014	
DESIGNED: BSB/ANZ DRAWN: BSB	CHECKED: JCR/AWB DESIGN GROUP: DLC	REVIEWED: WMD/DLC APPROVED: BFR	DATE: _____ REVISIONS: _____

 DRAWING NO. 35-015
 BRIDGE SHEET 15 OF 33