



PRECAST CONCRETE BARRIER DETAILS

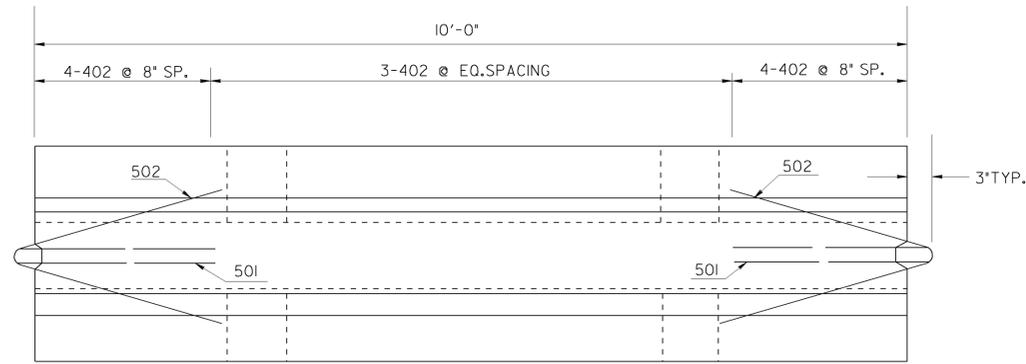


PLAN


NOTE:
BARRIER SECTIONS SHALL BE CONNECTED TOGETHER WITH THE 1 1/4" DIA. A-307 DOUBLE HEX CONNECTION BOLT. THE BOTTOM NUT & WASHER SHALL BE MAINTAINED BY THE CONTRACTOR FOR THE DURATION OF THE BARRIER INSTALLATION.

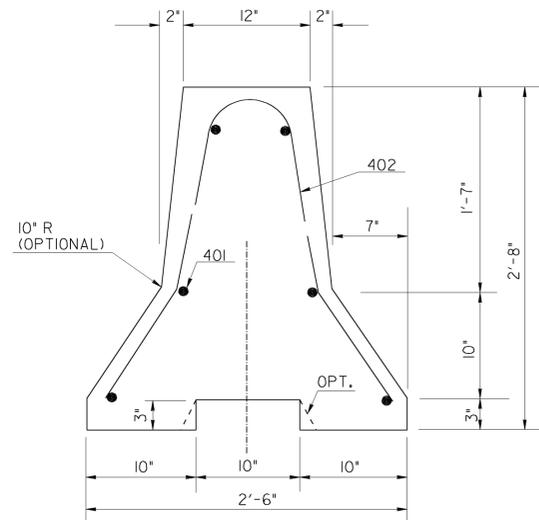

END ELEVATION

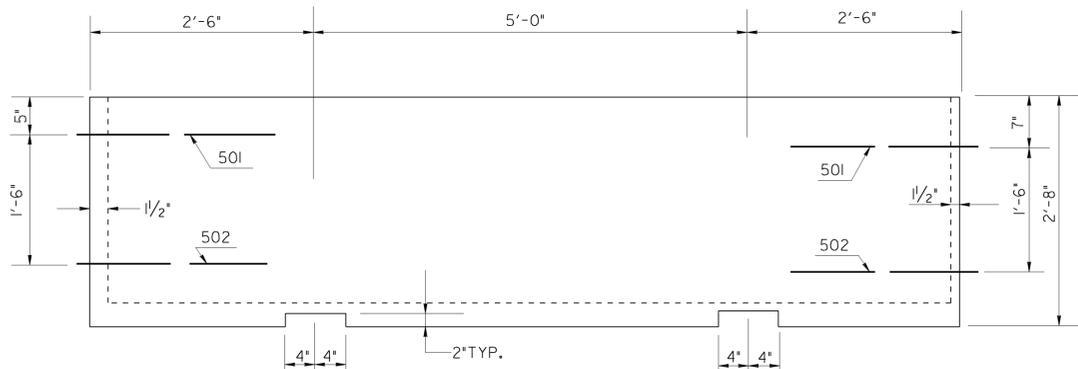

SIDE VIEW


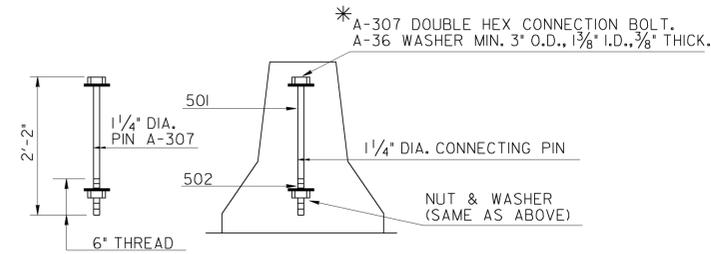


PIN CONNECTION

GENERAL NOTES:

- 1-MATERIALS: CLASS 'A' CONCRETE AND 40 STEEL.
- 2-SEE GA. SPECIFICATIONS FOR BASIS OF PAYMENT AND METHOD NO. ___.
- 3-REINFORCEMENT, HAVING AN AREA AT LEAST EQUAL TO REBARS SHOWN, MAY BE USED AS AN ALTERNATE.
- 4-BARRIERS SHALL BE PLACED SUCH THAT OPENINGS BETWEEN INDIVIDUAL SECTIONS SHALL BE KEPT TO A MAXIMUM.

* AN ALTERNATE CONNECTING PIN WITH A FUSED NUT ON THE TOP THREADED PORTION AND NUT AND WASHER AS SPECIFIED ON THE BOTTOM MAY ALSO BE USED.

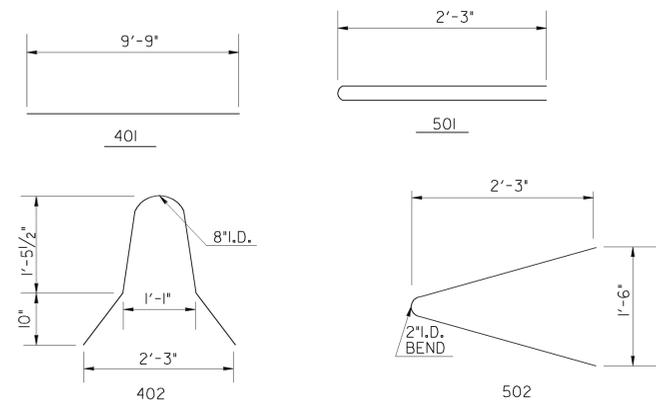

DAP DETAIL

DEPARTMENT OF TRANSPORTATION STATE OF GEORGIA			
STANDARD DETAILS OF PRECAST TEMPORARY BARRIERS			
REV. CONNECTION WASHER AND REV. GEN. NOTE NO. 4.	9-8-06	NO SCALE	
REV. REBAR & PIN CONN.	5-2-01		
COTTER PIN REQUIREMENT	5-10-96		
BY	DATE	AUG., 1995	
G.L.O.	DES. _____	(SUBMITTED) <i>[Signature]</i>	NUMBER 4961
R.M.J.	TRA. _____	(APPROVED) <i>[Signature]</i>	
CHK. _____	CHIEF ENGINEER		