
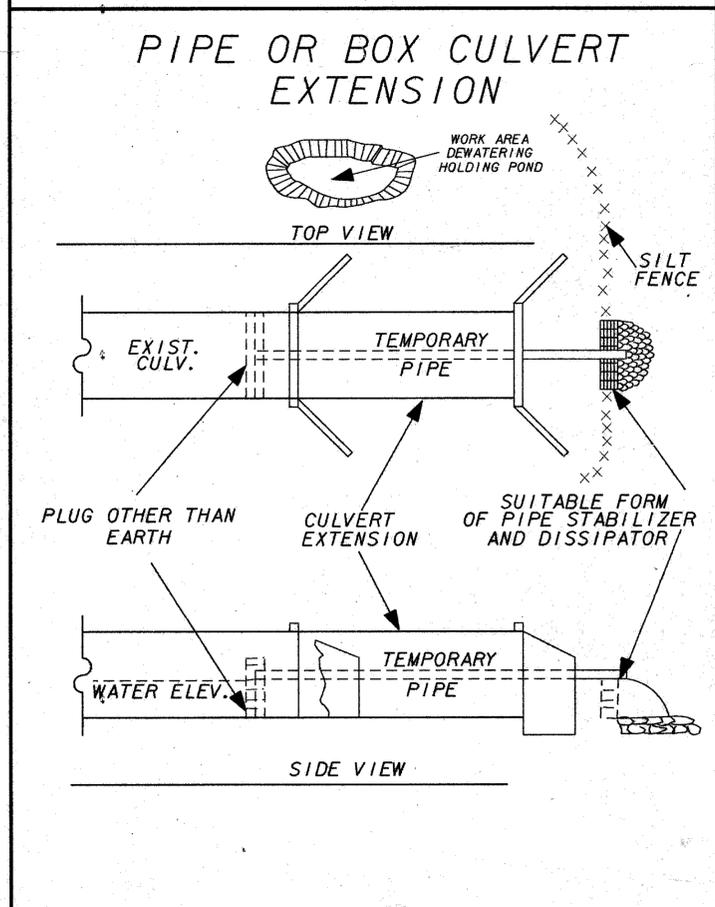
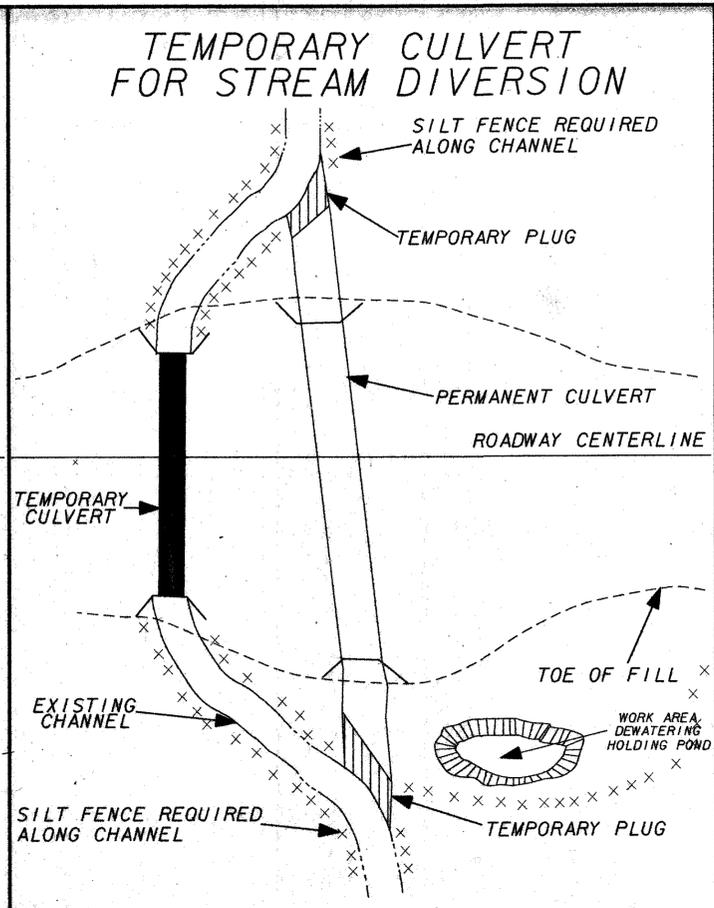
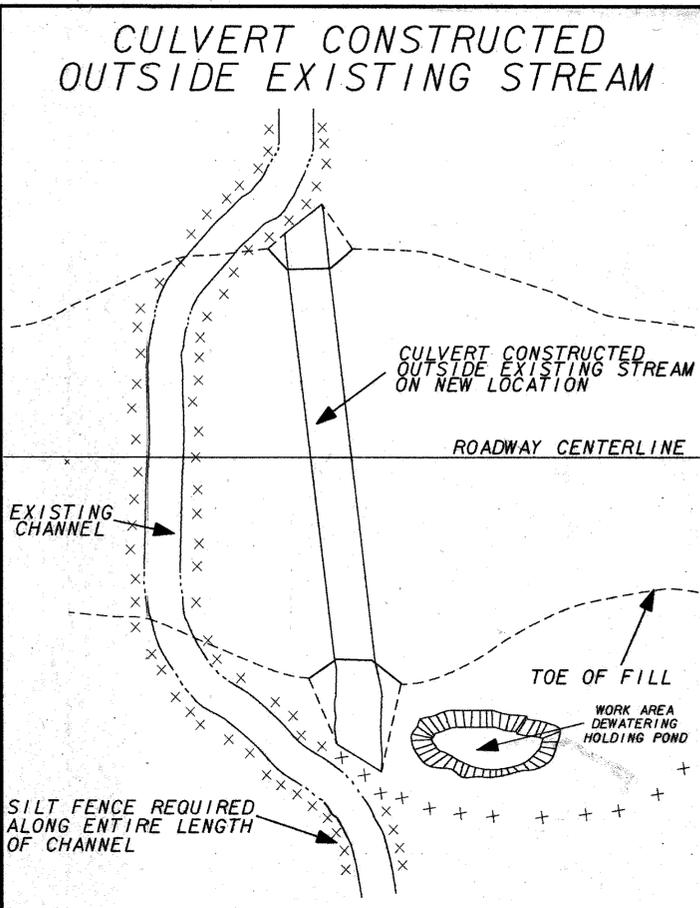


| | | | |
|-------|----------------|-----------|--------------|
| STATE | PROJECT NUMBER | SHEET NO. | TOTAL SHEETS |
| GA. | | | |

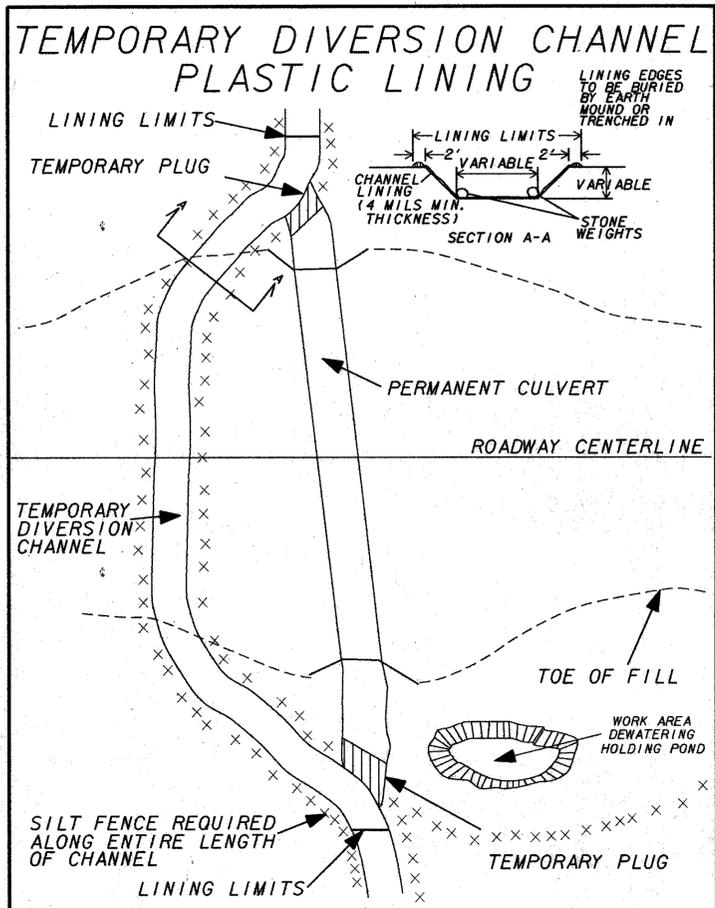

1. THESE DETAILS ARE NOT CONSTRUCTION DRAWINGS. THEY ARE ROUGH SKETCHES OF IDEAS. ALTERNATES MAY BE SUBMITTED BY THE CONTRACTOR IN THE EROSION CONTROL PLAN.
2. DIVERSION CHANNELS TO BE INCLUDED IN THE COST OF CULVERT, WHEN REQUIRED.
3. THE PLASTIC LINING SHALL BE PVC OR PE MATERIAL WITH A MINIMUM THICKNESS OF 6 MILS.
4. THE LAP OF THE SHEETS OF PLASTIC LINING SHALL BE A MINIMUM OF 2 FEET.
5. THE DIVERSION CHANNEL SHOULD BE THE SAME WIDTH AND DEPTH AS THE EXISTING CHANNEL.

| | |
|------|------------------|
| M.W. | JUNE 28, 1993 |
| M.W. | MAY 14, 1993 |
| M.W. | OCTOBER 23, 1992 |
| M.W. | JUNE 28, 1989 |
| BY | REVISION DATE |

GEORGIA
DEPARTMENT
OF
TRANSPORTATION
 EXAMPLES OF
 DIVERSION CHANNELS