| STATE | PROJECT NUMBER | SHEET NO. | TOTAL SHEETS |
|---|---|---|---|
| GA. | STP-209-1(17) | 416 | 513 |

Media

## CONCRETE CURB & GUTTER




TYPE 7

** AT CONTRACTOR'S OPTION THE GUTTER THICKNESS MAY BE INCREASED AT EDGE OF PAVEMENT TO MAKE BOTTOM OF GUTTER PARALLEL WITH PAVING OF BASE COURSE, BUT THE GUTTER THICKNESS MUST NOT BE LESS THAN THE SPECIFIED 150 OR 200 mm AT ANY POINT.

## CONCRETE HEADER CURB




TYPE 7

THE 200 mm MIN. DEPTH MAY BE INCREASED AT CONTRACTOR'S OPTION SO BOTTOM OF HEADER CURB ALIGNS WITH PAV. BOTTOM.

## CONCRETE DOWELED INTEGRAL CURB




TYPE 7

TIE BARS WILL BE PLACED AS SOON AS PRACTICAL AFTER FINISHING AND BEFORE INITIAL SET IN PPC PAVEMENT. TIE BARS MAY BE DRIVEN IN OR DRILLED & GROUTED IN ASPHALT PAVING, JOINTS IN CURB SHALL MATCH THOSE IN PCC PAV. OR BE AT 6.0 m SPA. FOR ASPHALT PAVING

## CONCRETE INTEGRAL CURB




TYPE 7

## RAISED EDGE WITH CONCRETE GUTTER




RAISED EDGE TO BE CONSTRUCTED WITH SAME CONCRETE MIX AS THE GUTTER AND SHALL BE FORMED IMMEDIATELY AFTER GUTTER HAS BEEN FINISHED OR FORMED MONOLITHIC WITH GUTTER JOINTS IN RAISED EDGE SHALL MATCH THOSE IN THE GUTTER.
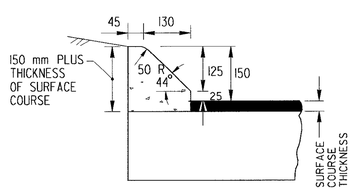
## CONCRETE HEADER CURB (TYPE 6)




## DETAILS OF RECESSED CURB

TYPICAL USE: AT DRIVEWAYS OR CURB CUT RAMPS




NOTE: CURB & GUTTER WILL BE MEASURED FOR PAYMENT THRU THE DRIVE OR RAMP OPENING




SECTIONAL VIEW

(SEE SEPARATE STANDARD FOR DRIVEWAY OR CURB RAMP FOR ADDITIONAL DETAILS.)

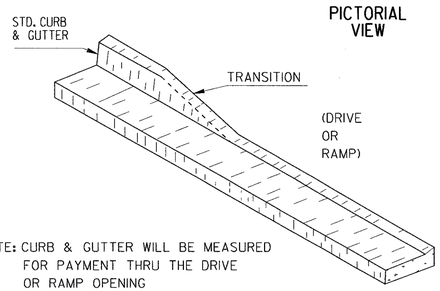NOTE:
IF CONCRETE MEDIAN INTERCEPTS PEDESTRIAN CROSSWALKS, WHEELCHAIR RAMPS (STANDARD 9031-W) WILL BE REQUIRED.

## CONCRETE MEDIAN (Between Curbs)

NOTE: CURB TYPES SHOWN ARE TYPICAL. OTHER TYPES MAY BE SPECIFIED.




NOTE: WIDTH OF CONCRETE MEDIAN WILL BE AS SHOWN IN PLANS

## CONCRETE MEDIANS (Integral)

-WITH TIE BARS- -WITHOUT TIE BARS-




#10 BARS AT 400 mm C. to C. BOTH WAYS OR WELDED WIRE FABRIC WITH STEEL AREA OF 125 mm SQUARE/1.0 m BOTH WAYS OR AN APPROVED ALTERNATE.

## CONCRETE HEADER CURBS

(STANDARD FACE DESIGNS)

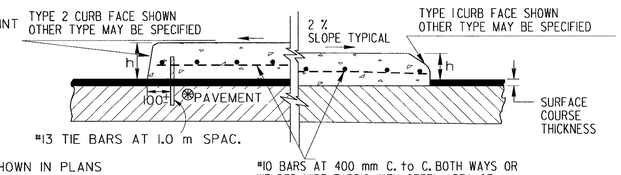


TYPE 1 TYPE 2,3 OR 4

| CURB TYPE | h | d |
|---|---|---|
| 1 | 100 | 150 min. |
| 2 | 150 | 200 min. |
| 3 | 200 | 250 min. |
| 4 | 250 | 300 min. |

THE DIMENSION d MAY BE INCREASED AT CONTRACTOR'S OPTION SO BOTTOM OF HEADER CURB WILL ALIGN WITH BOTTOM OF PAVING.

## CONCRETE CURB & GUTTER

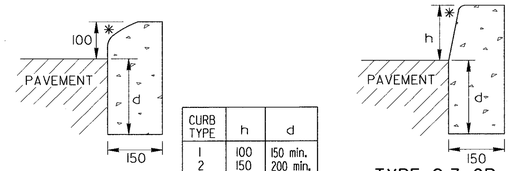


TYPE 1 TYPE 2, 3 OR 4

** AT CONTRACTOR'S OPTION THE GUTTER THICKNESS MAY BE INCREASED AT EDGE OF PAVEMENT TO MAKE BOTTOM OF GUTTER PARALLEL WITH PAVING OF BASE COURSE, BUT THE GUTTER THICKNESS MUST NOT BE LESS THAN THE SPECIFIED 150 OR 200 mm AT ANY POINT.

## CONCRETE DOWELED INTEGRAL CURBS

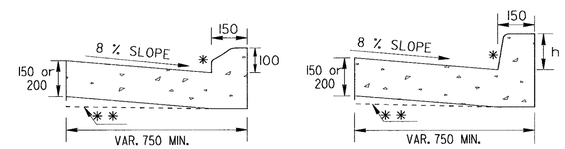


TYPE 1 TYPE 2,3 OR 4

⊛ P.C. CONCRETE PAVEMENT-
TIE BARS WILL BE PLACED AS SOON AS PRACTICABLE AFTER FINISHING AND BEFORE INITIAL SET HAS TAKEN PLACE. JOINTS IN CURB OR CONC. MEDIAN WILL MATCH THOSE IN PAVEMENT.

⊛ ASPHALT PAVEMENT-
TIE BARS MAY BE DRIVEN IN OR DRILLED AND GROUTED IN. CONTRACTION JOINTS ARE TO BE CONSTRUCTED IN CURB OR CONCRETE MEDIAN AT 6.0 m SPACINGS.

| MINIMUM TIE BAR LENGTHS (FOR CONC. DOWELED CURBS OR CONC. MEDIAN) | | |
|---|---|---|
| CURB TYPE | P.C. CONC. PAV. | ASPHALT PAV. |
| 1 | 150 | 200 |
| 2, 3 or 4 | 200 | 300 |

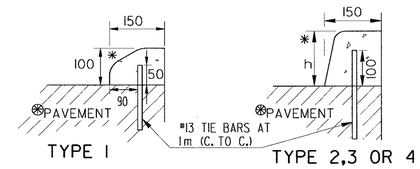NOTE:
TIE BARS FOR DOWELED CURBS MAY BE UNCOATED PLAIN OR DEFORMED BILLET-STEEL BARS (GRADE 300) AS USED FOR CONCRETE REINFORCEMENT. (AASHTO M-31)

## CONCRETE INTEGRAL CURB

(TYP11)




NOTE:
REBAR SIZES ARE PER ASTM A615M, SI UNITS, EQUIVALENT U.S. STANDARD SIZE AND/OR EQUAL STEEL AREAS WILL BE ALLOWED.

## *STANDARD CURB FACE DESIGN




TYPE 7 TYPE 1 TYPE 2, 3 OR 4

| TYPE | h |
|---|---|
| 1 | 100 |
| 2 | 150 |
| 3 | 200 |
| 4 | 250 |

NOTE: DIMENSIONS ARE IN MILLIMETERS UNLESS SPECIFIED OTHERWISE.

| REVISION | BY | DATE |
|---|---|---|
| GENERAL REVISIONS | RMU | 3-6-97 |

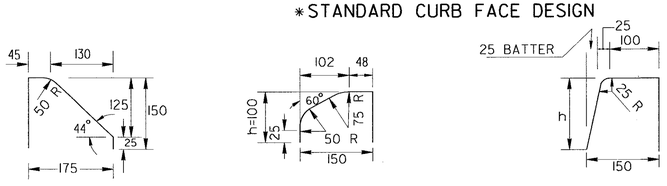DEPARTMENT OF TRANSPORTATION
STATE OF GEORGIA

STANDARD

CONCRETE CURB & GUTTER
CONCRETE CURBS, CONCRETE MEDIANS
(METRIC)

NOV. 1995

DES. ____ DRW. ____ TRA. ____ CHK. ____

(SUBMITTED) James A. Lemond
STATE ROAD & AIRPORT DESIGN ENGR.
(APPROVED) Paul L. Liddy
CHIEF ENGINEER

NUMBER 9032B