



STATE	PROJECT NUMBER	SHEET NO.	TOTAL SHEETS
GA.			

GORE AREA RPM SPACING



EXIT RAMP

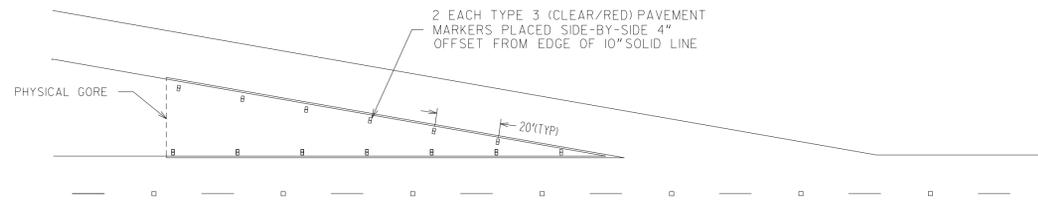

ENTRANCE RAMP

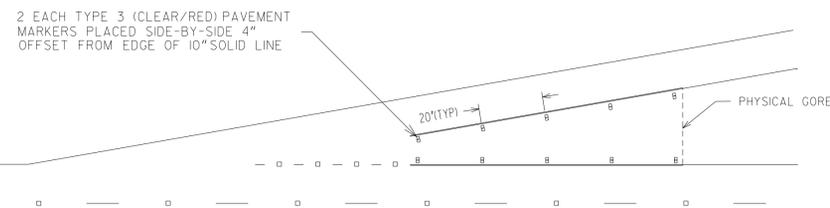

FREE-FLOW RAMP

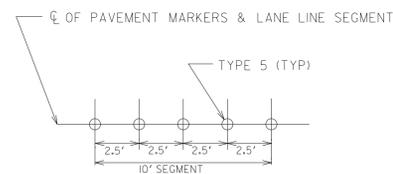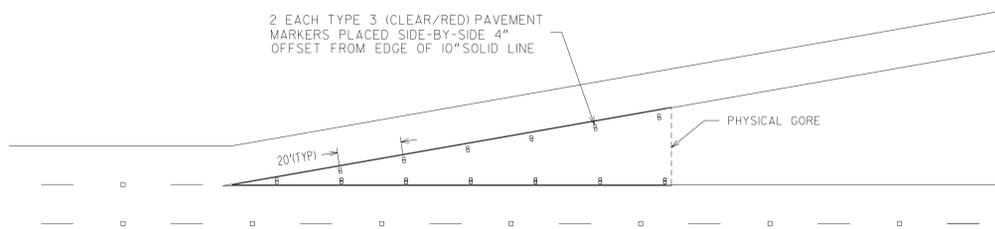


ALTERNATE PAVEMENT MARKER INSTALLATION
(USE ON ALL LANE LINES WHEN LANE LINES CROSS
LONGITUDINAL CONCRETE PAVEMENT JOINTS)

GENERAL NOTES:


1. FOR SPECIFICATIONS REFER TO STANDARD SPECIFICATIONS; SECTION 654-RAISED PAVEMENT MARKERS.
2. CENTERLINE OF TYPE 3 RAISED PAVEMENT MARKERS SHALL COINCIDE WITH CENTERLINE OF MARKINGS.
3. CLEAR FACE OF TYPE 3 RAISED PAVEMENT MARKERS SHALL BE ORIENTED TOWARD APPROACHING TRAFFIC.

MAINLINE RPM SPACING

SKIP WHITE 10' SEGMENT (30' GAP)

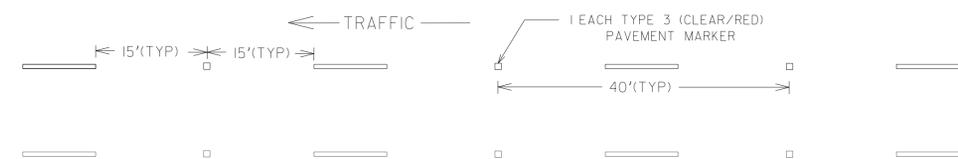


SKIP WHITE W/ CONTRAST 20' SEGMENT (20' GAP)

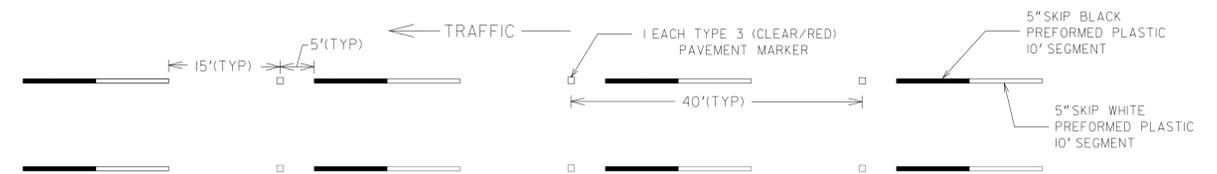

SKIP WHITE 3' SEGMENT (9' GAP)



SKIP WHITE W/ CONTRAST 6' SEGMENT (6' GAP)

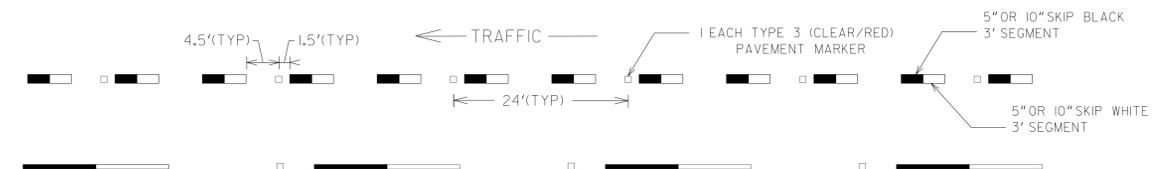

		9-15-2016	DATE	DEPARTMENT OF TRANSPORTATION STATE OF GEORGIA	
			REVISION	CONSTRUCTION DETAILS RAISED PAVEMENT MARKER LOCATION LIMITED ACCESS ROADWAY	
			REDRAWN	NO SCALE	JANUARY 2000
			CDR BY	DESIGNED _____ DRAWN _____ TRACED _____ CHECKED _____	NUMBER T-15B