


TYPE 1 ARROW - BICYCLE LANE

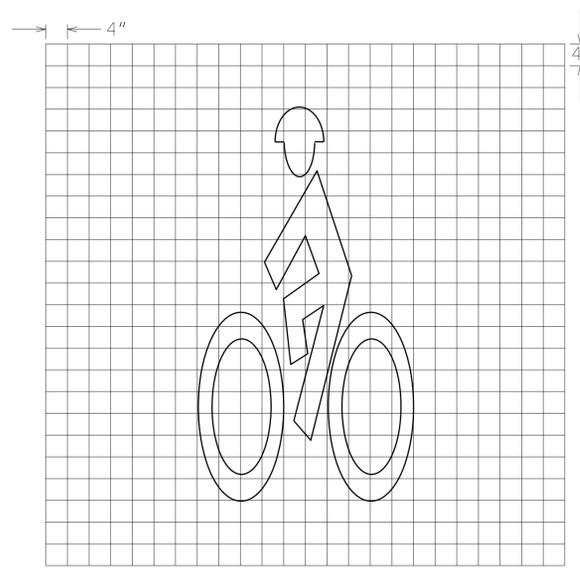

TYPE 4 SYMBOL - BICYCLE LANE

GENERAL NOTES:

1. BICYCLE LANE SYMBOLS SHALL BE PLACED ON THE FAR SIDE OF EACH INTERSECTION 6 FEET BEYOND THE CROSS WALK OR END OF INTERSECTING ROAD RADII. ADDITIONAL SYMBOLS MAY BE PLACED ON LONG, UNINTERRUPTED SECTIONS OF ROADWAY BASED ON ENGINEERING JUDGEMENT.
2. ALL BICYCLE LANE PAVEMENT SYMBOLS SHALL BE HOT APPLIED PREFORMED PLASTIC (THERMOPLASTIC - 659) FOR BOTH ASPHALT AND CONCRETE PAVEMENTS.
3. BICYCLE LANE EDGE LINE SHALL MATCH THE PAVEMENT MARKING TYPE SPECIFIED BY THE PAVEMENT MARKING SELECTION CHART IN SECTION 12 OF THE SIGNING AND MARKING DESIGN GUIDELINES.
4. FOR ADDITIONAL INFORMATION REFER TO MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES, CURRENT EDITION, AND AASHTO GUIDE FOR THE DEVELOPMENT OF BICYCLE FACILITIES, CURRENT EDITION.

Rev. 2009 MUTCD Manual REVISION	3-30-16 DATE	DEPARTMENT OF TRANSPORTATION STATE OF GEORGIA	
	CONSTRUCTION DETAILS DETAILS OF BICYCLE LANE PAVEMENT MARKINGS		
NO SCALE		JANUARY 2000	
HAC BY	DESIGNED _____ DRAWN _____ TRACED _____ CHECKED _____	NUMBER T-16	