


TS-03
SR 24 AT ELLISON BRIDGE ROAD
STA. 50+29.15 TO 61+20.39

- (A) - RECYCLED ASPH CONC 12.5 mm SUPERPAVE, GP 2 ONLY, INCL BITUM MATL & H LIME - 165 LBS/SY
- (B) - RECYCLED ASPH CONC 19 mm SUPERPAVE, GP 1 OR 2, INCL BITUM MATL & H LIME - 220 LBS/SY
- (C) - RECYCLED ASPH CONC 25 mm SUPERPAVE, GP 1 OR 2, INCL BITUM MATL & H LIME - 440 LBS/SY
- (D) - GR AGGR BASE CRS, INCL MATL - 10 INCH DEPTH

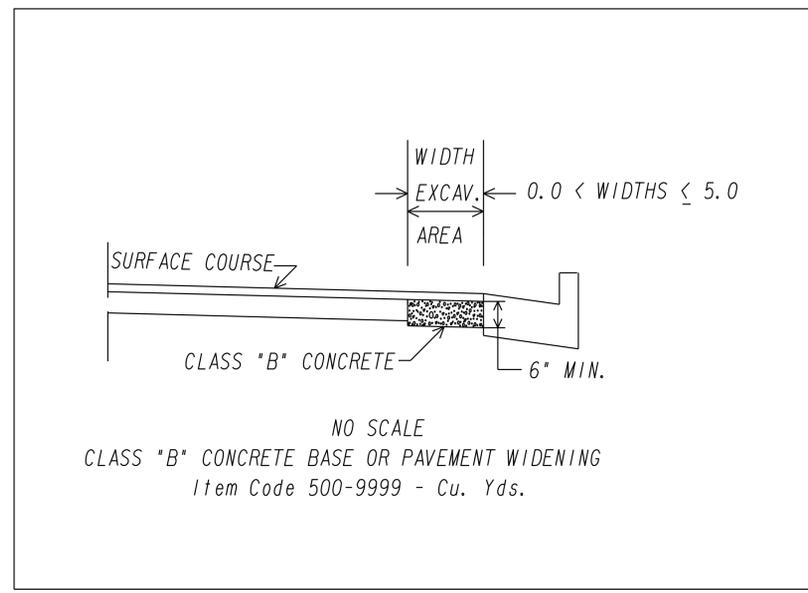

In excavated areas between the existing paving and new curb and gutter that are 5'-0" or less in width, Class "B" concrete shall be placed in lieu of the base and paving specified by the typical section. Payment will be made under "Class B Concrete Base and Pavement Widening".

In excavated areas greater than 5'-0" in width, the Contractor shall place base and paving as specified on the typical section.

See plans for details of curb and gutter construction.