
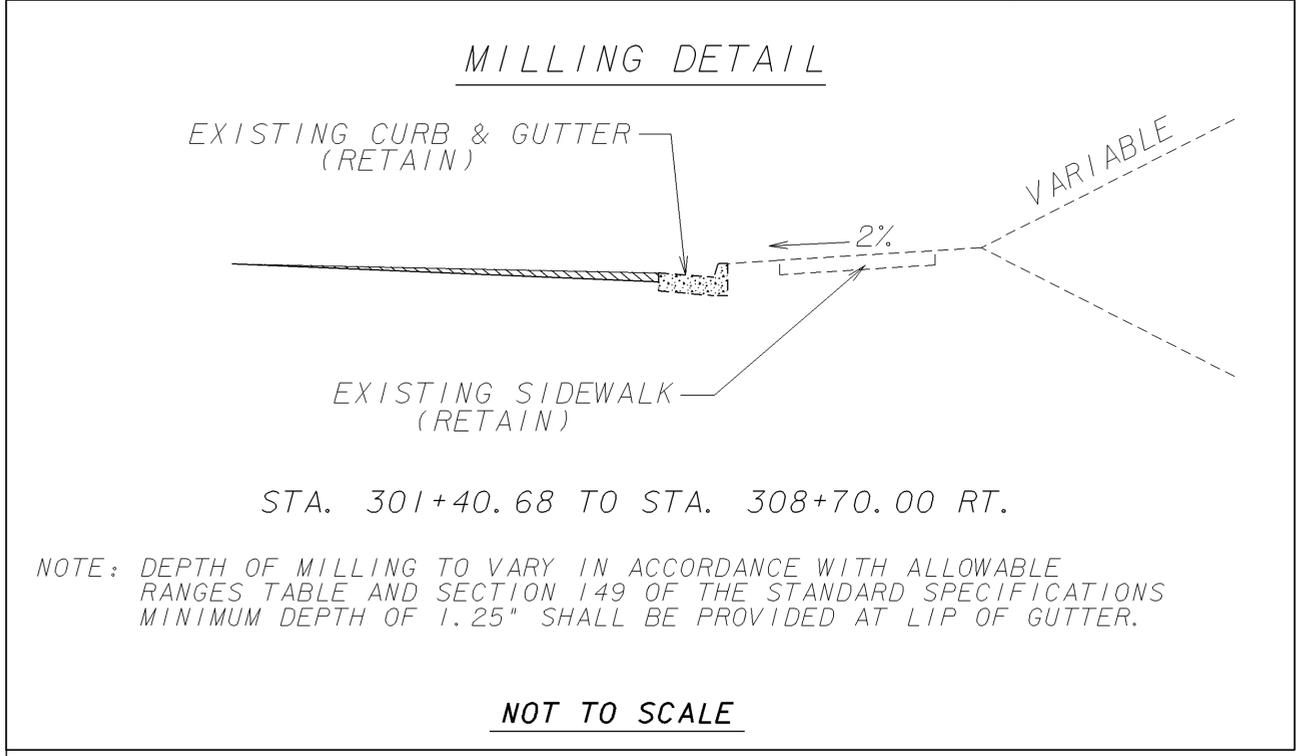
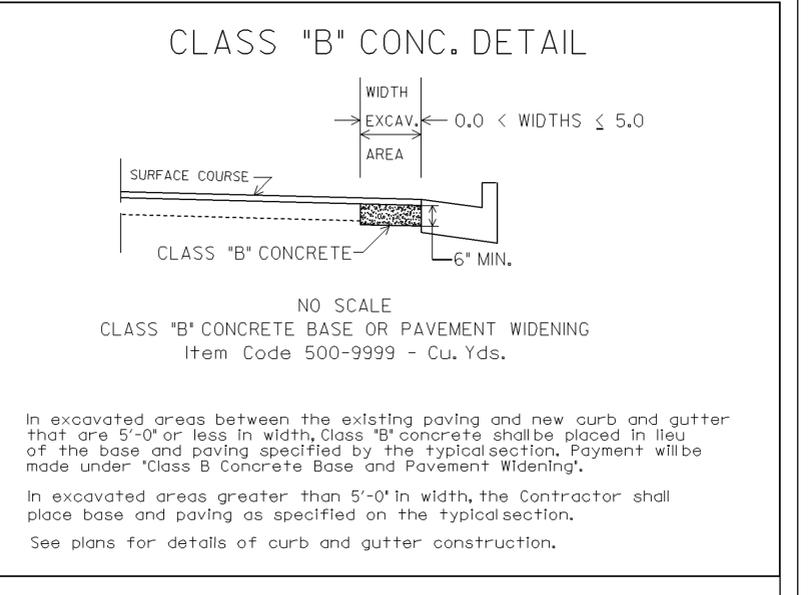
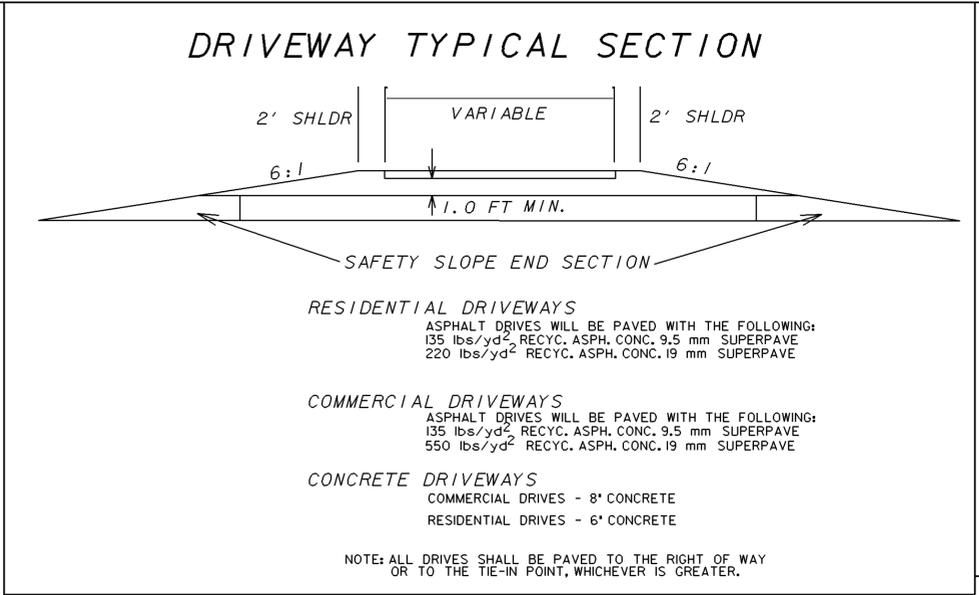


REVISION DATES	STATE	PROJECT NUMBER	SHEET NO.	TOTAL SHEETS
	GA.	NH000-0038-01 (040)		

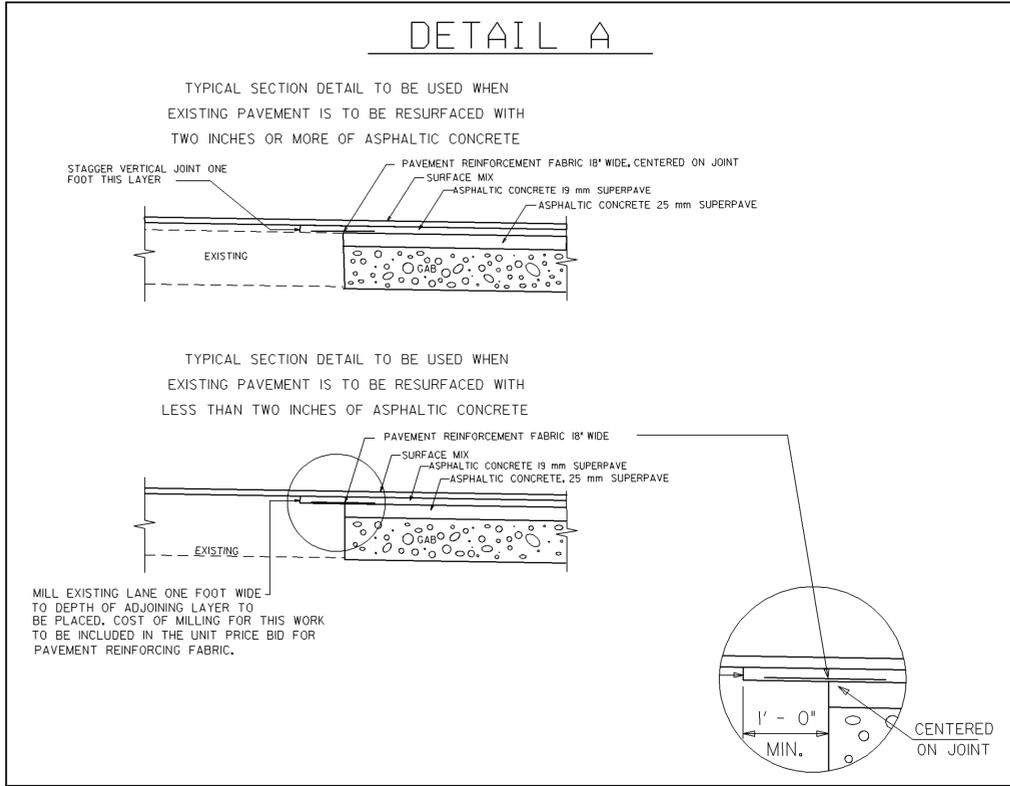

*** STANDARD CROSS - SLOPE MAY BE VARIED - AS DIRECTED BY THE ENGINEER - TO BEST FIT THE EXISTING ROADWAY AS PER SECTION 149 OF THE STANDARD SPECIFICATIONS. SEE "ALLOWABLE RANGES TABLE" BELOW.

ALLOWABLE RANGES TABLE

FOR THIS PROJECT, CROSS SLOPES THAT ARE ADJUSTED TO "BEST FIT" EXISTING PAVEMENT SLOPES ARE SUBJECT TO THE FOLLOWING LIMITS:

A: NORMAL CROWN

SECTION WITH GRADES 0.5% OR GREATER	SECTION WITH GRADES 0.5% OR LESS
0.0150 FT/FT - MINIMUM	0.0156 FT/FT - MINIMUM
0.0208 FT/FT - DESIRABLE	0.0208 FT/FT - DESIRABLE
0.0250 FT/FT - MAXIMUM	0.0300 FT/FT - MAXIMUM

B: SUPERELEVATION RATE

S.E. RATE SHOWN ON PLANS OR S.E. RATE EXISTING IN FIELD (WHICHEVER IS GREATER)

C: SUPERELEVATION TRANSITION LENGTH (LENGTH FROM FLAT TO FULL S.E.)

RATE OF CHANGE	CORRESPONDING DIFFERENCE IN GRADE BETWEEN PIVOT POINT AND EDGE OF PAVEMENT
MINIMUM 1:150	0.67%
DESIRABLE 1:200	0.50%
MAXIMUM 1:300	0.33%

*LENGTH SHALL BE SET TO AVOID CREATING A FLAT GUTTER GRADE ON LOW SIDE AND TO AVOID FLAT CROSS - SLOPES AT OR NEAR THE LOW POINT OF VERTICAL CURVES.

D: POSITIONING OF SUPERELEVATION TRANSITION LENGTH ON SIMPLE CURVES

50% OF TRANSITION INSIDE CURVE - MAXIMUM
 33% OF TRANSITION INSIDE CURVE - DESIRABLE
 20% OF TRANSITION INSIDE CURVE - MINIMUM

NOTE: CROWN WIPE OUT SHALL BE AT THE SAME RATE AS THE S.E. TRANSITION.

E: SMOOTHING OF BREAKS IN EDGE PROFILE AT BEGIN AND END OF TRANSITION
 SHALL BE ACCOMPLISHED BY VERTICAL CURVE WITH A MINIMUM LENGTH (IN FEET) EQUAL TO THE SPEED DESIGN (IN MPH).