


STATE	PROJECT NUMBER	SHEET NO.	TOTAL SHEETS
GA.	NH000-0006-04(031)	160	321



- Notes:
1. Irrigation Contractor shall adhere to GDOT right-of-way Irrigation Installation Requirements, such as, but not limited to, wrapping irrigation in metallic tape, installing manual shut-off valves. It shall be responsibility of Irrigation Contractor to verify GDOT Irrigation requirements before submittal of bid. If necessary apply additional GDOT requirements and their cost to bid.
 2. Irrigation Mainline shall be installed as physically close to the right-of-way boundary line as possible while staying within the right-of-way. If proposed or existing utilities are running along right-of-way line, irrigation mainline shall be installed so that not running directly over top (and parallel) to those utilities.
 3. Irrigation Installation Contractor shall adjust heads so that no water sprays onto any pavement areas, including sidewalks and the roadway.
 4. All Valve Boxes to utilize lockable Covers.
 5. Tracer wires shall be installed above all irrigation piping (mainline and laterals).
 6. A shut-off valve is required at meter location for emergency shut-off purposes.
 7. Refer to other project specific general notes on sheet 29-31.

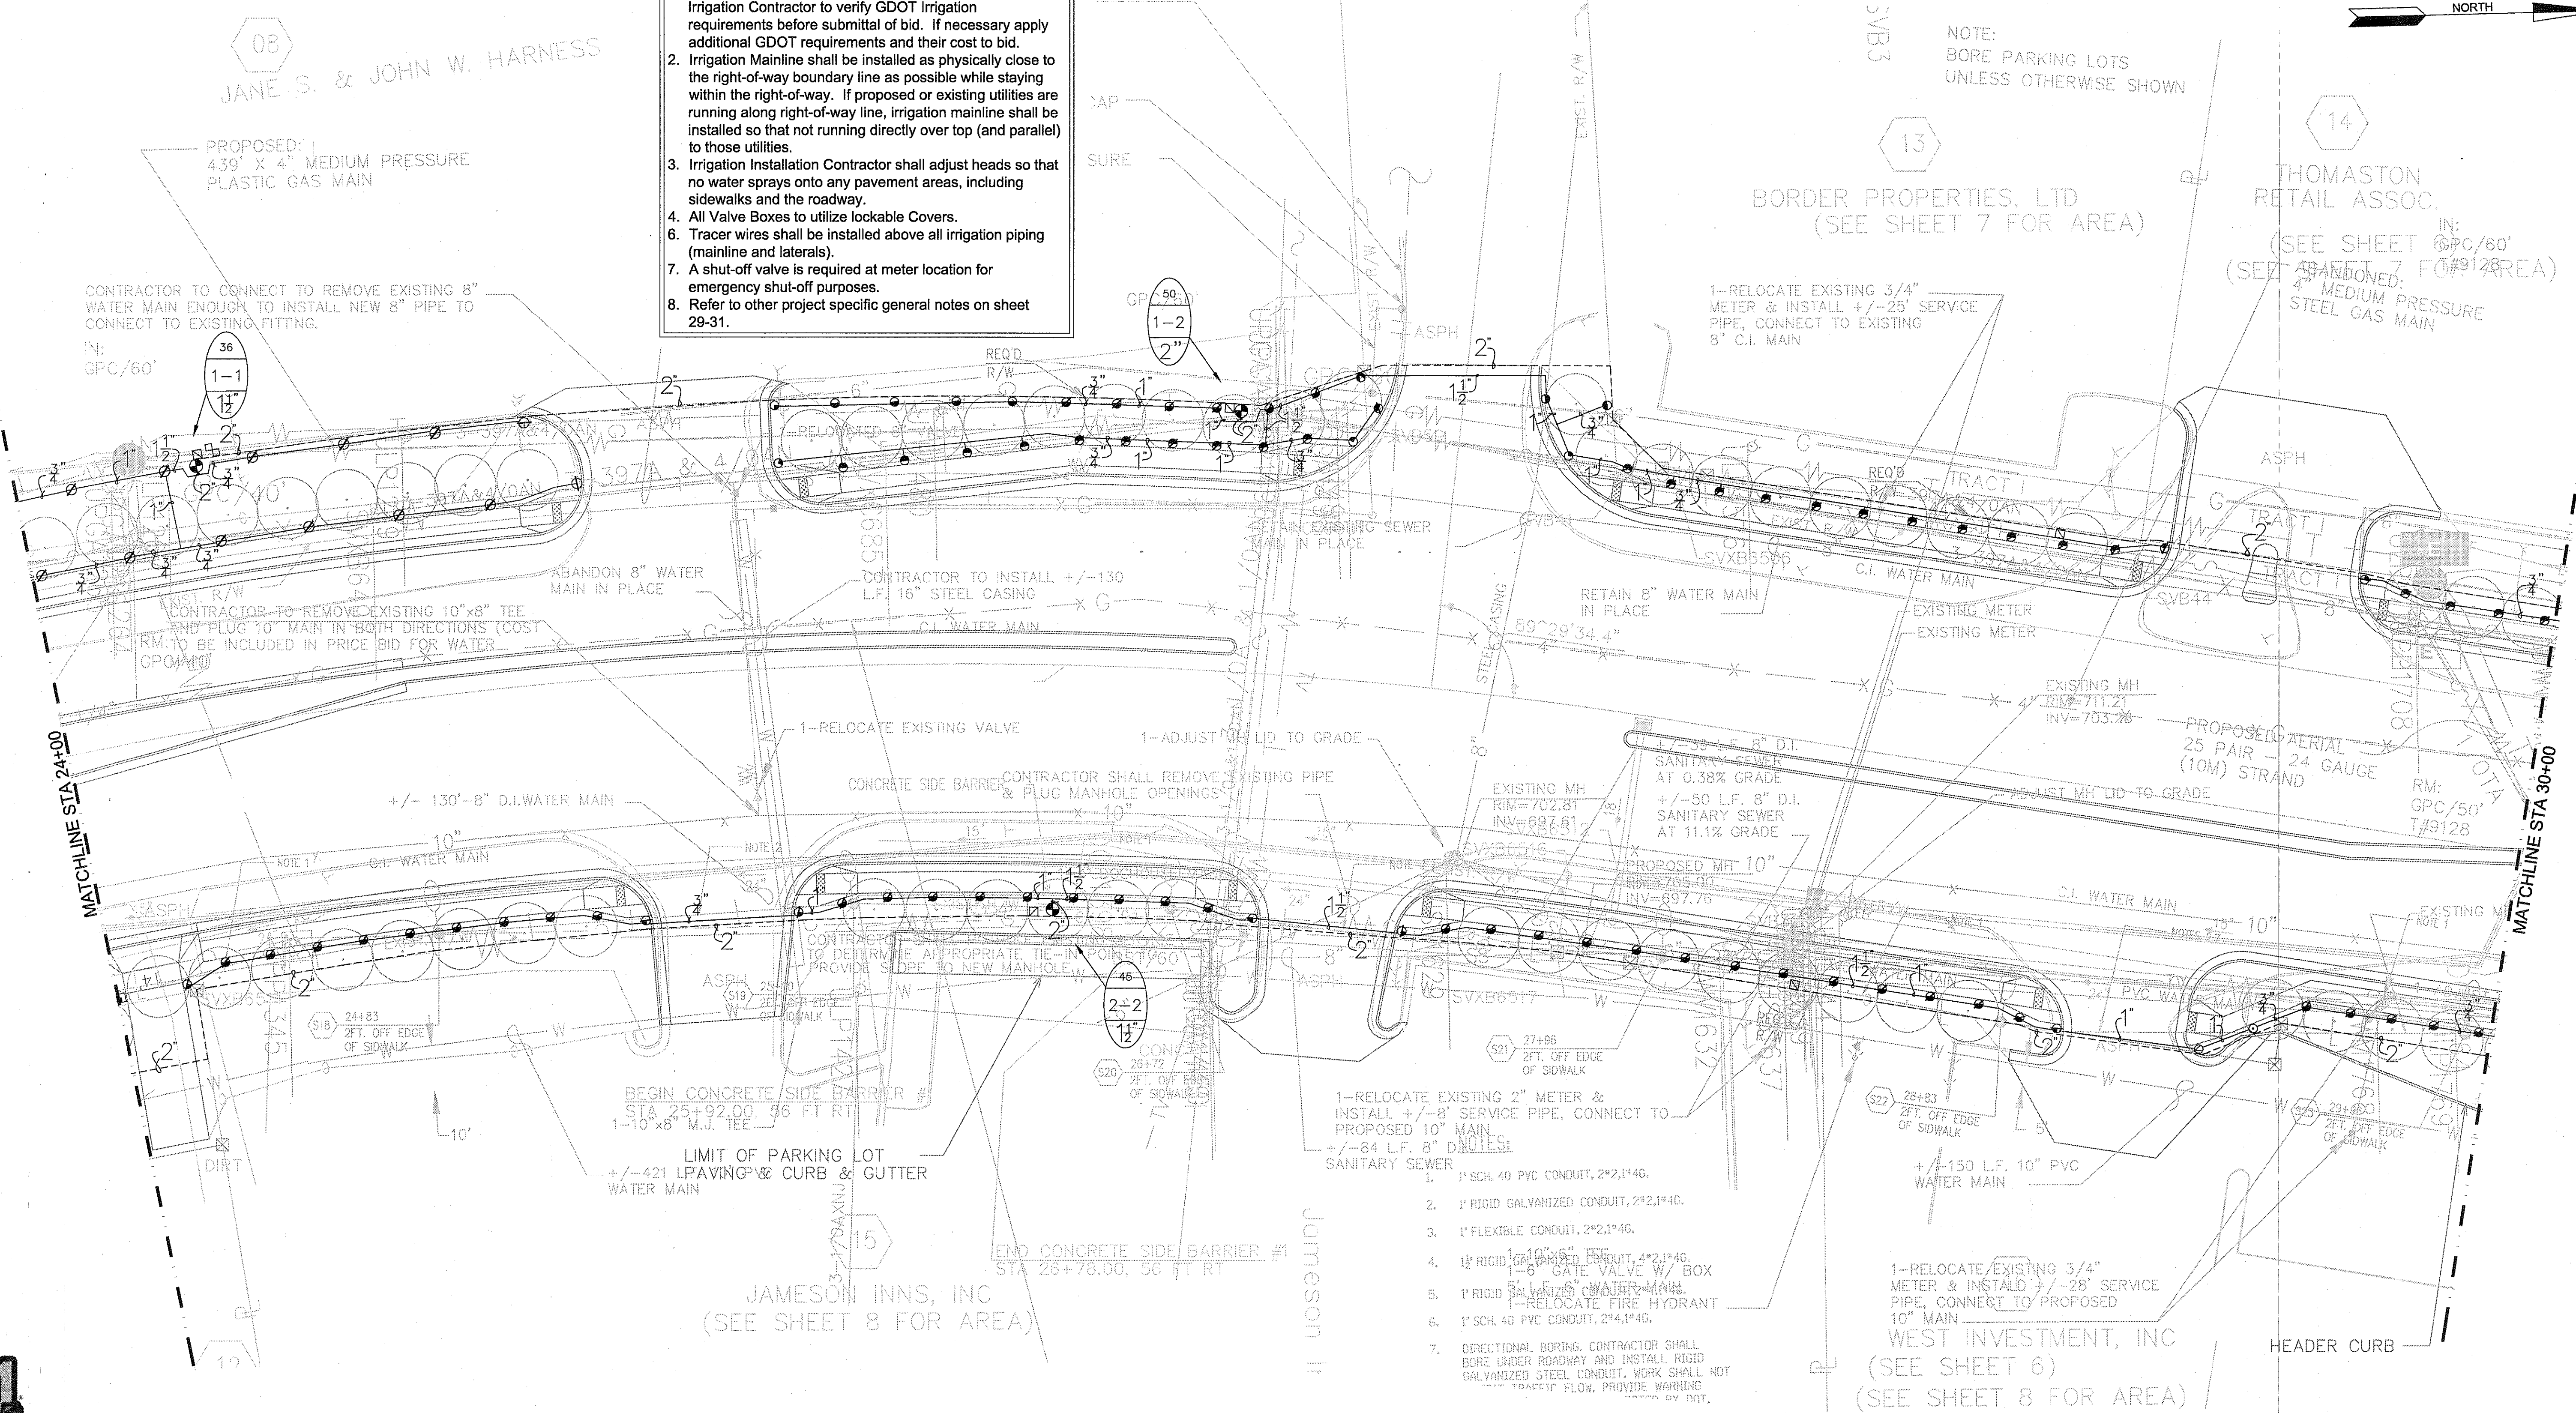


Know what's below.
Call before you dig.

Irrigation
Consultant
Services
2231 Weatherstone Circle
Conyers, GA 30094
(770) 929-0884, fax (770) 760-8025

CALVIN S. HOPKINS III
LANDSCAPE ARCHITECT
716 SOUTH CENTER STREET
THOMASTON, GEORGIA 30286
706.647.7636

DATE	DATE	DATE	DATE

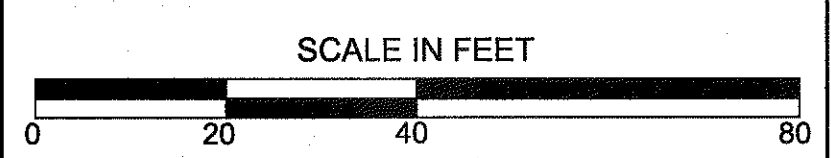

LAND LOT NO.
LAND DISTRICT: 10th GMD: 55

GEORGIA
DEPARTMENT OF TRANSPORTATION
IRRIGATION PLAN
PROJECT: NH000-006-04(031)
COUNTY: UPSON