
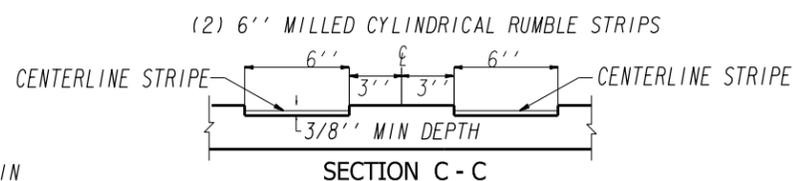
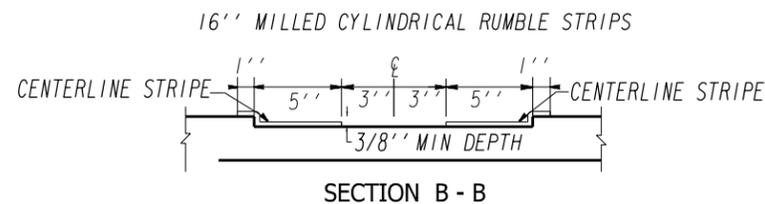

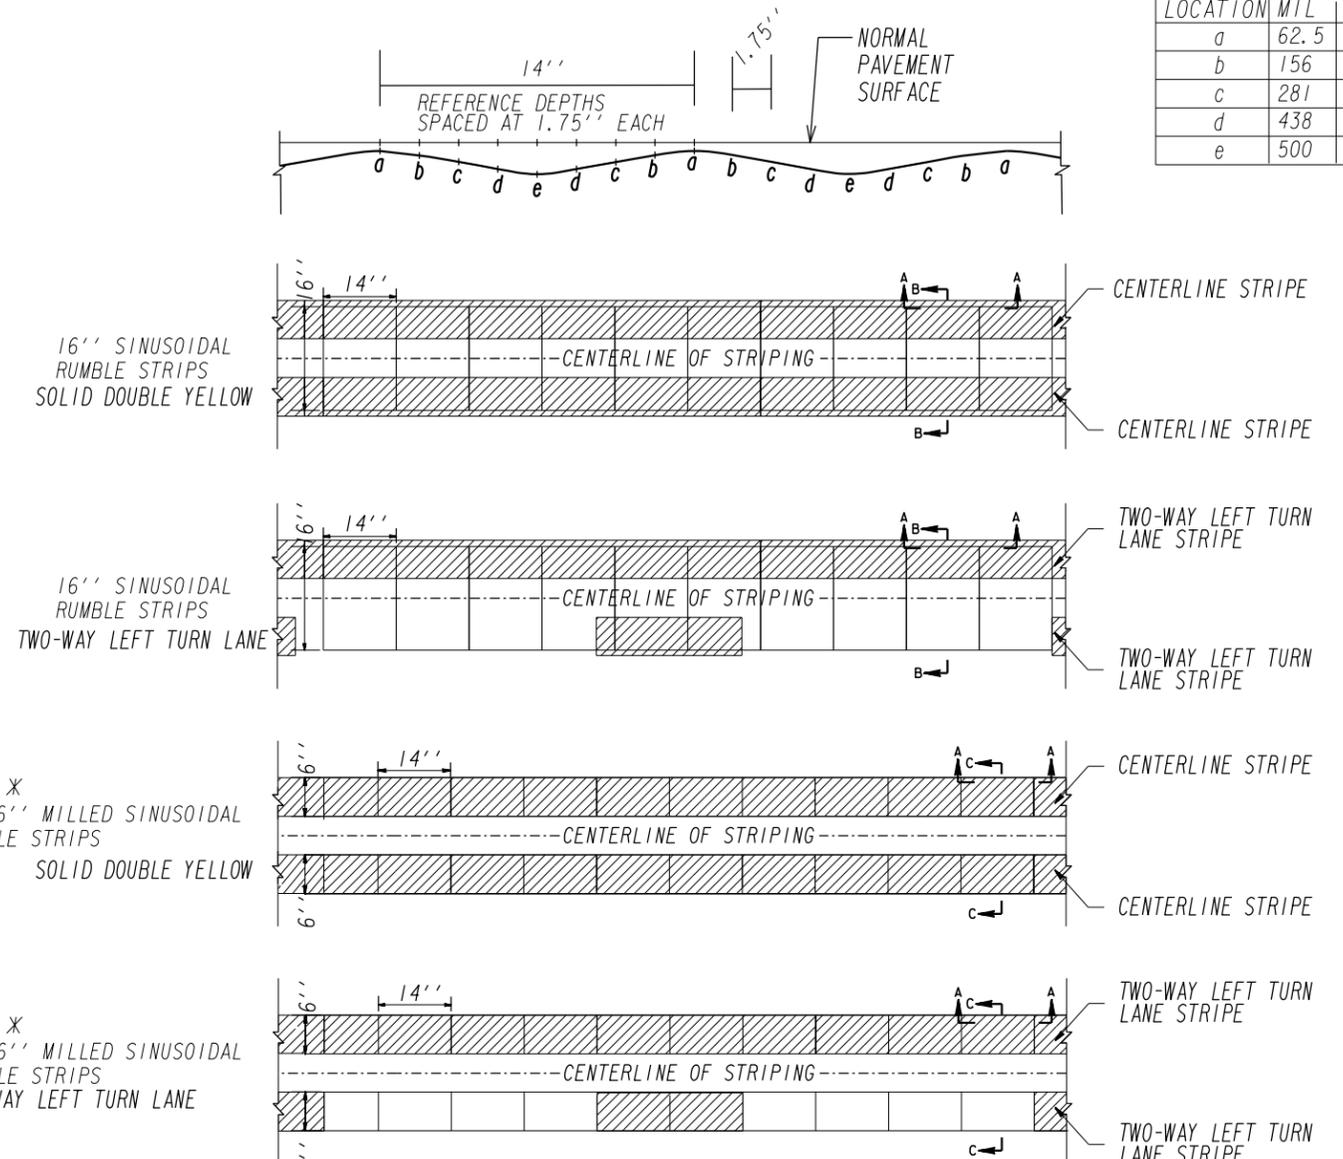





CENTERLINE CYLINDRICAL RUMBLE STRIP DETAILS

CENTERLINE SINUSOIDAL RUMBLE STRIP DETAILS

LOCATION	DEPTH	
	MIL	INCHES
a	62.5	1/16"
b	156	5/32"
c	281	9/32"
d	438	7/16"
e	500	1/2"

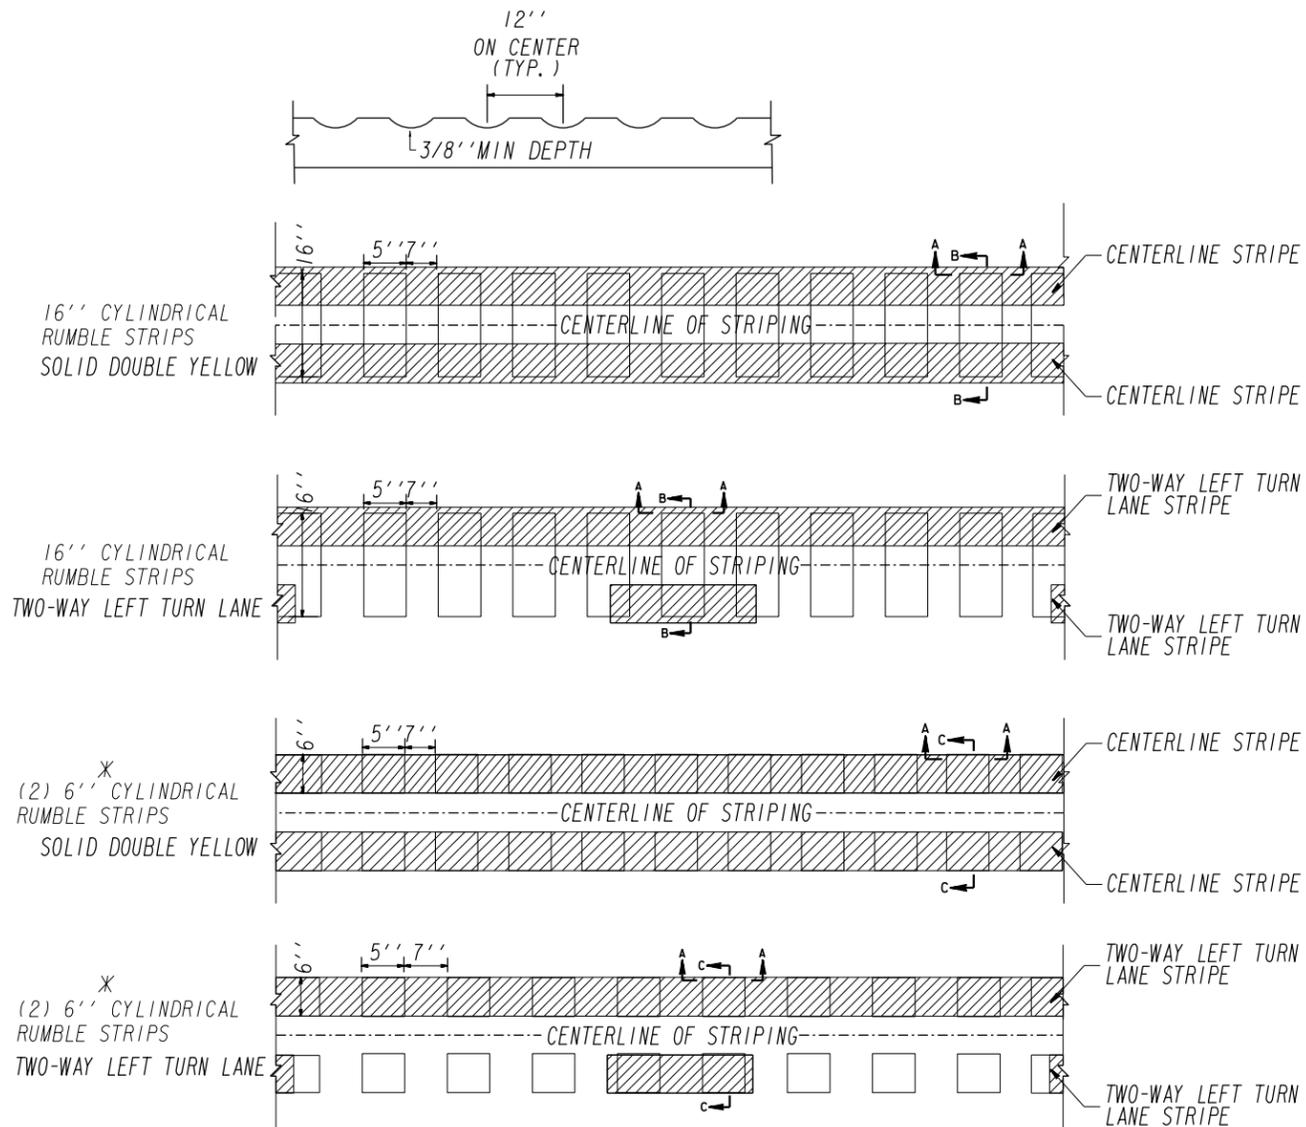

* THE 6'' OPTION IS TO BE USED IN CIRCUMSTANCES WHERE THE EXISTING ROADWAY IS BEING RETRO-FITTED TO INCLUDE CENTERLINE RUMBLE STRIPS, OR TO REDUCE IMPACTS TO CENTER PAVEMENT JOINT.

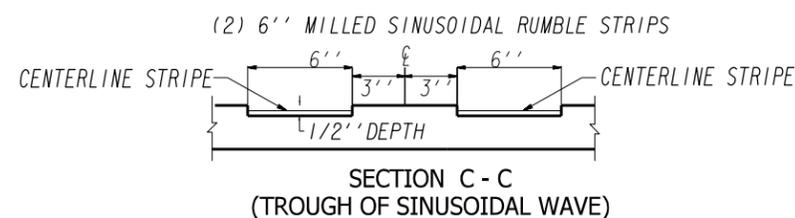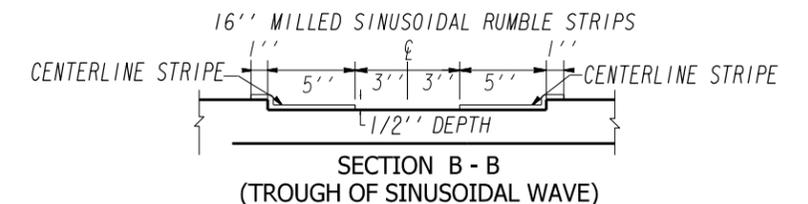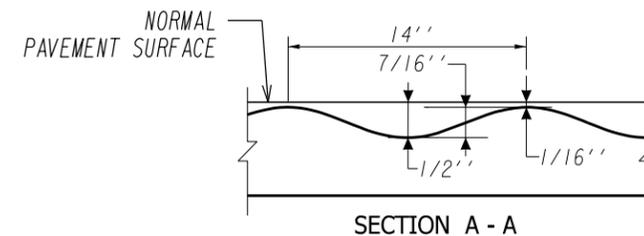

DATE		DEPARTMENT OF TRANSPORTATION STATE OF GEORGIA	
		CONSTRUCTION DETAIL CENTERLINE RUMBLE STRIP DETAILS	
REVISION		JULY 2024 NOT TO SCALE	
BY		NUMBER T-34	