
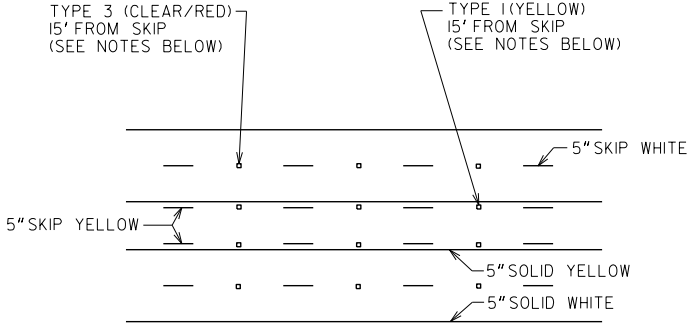
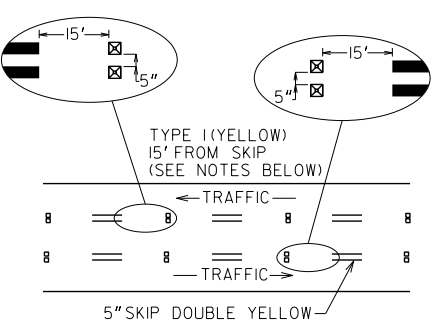



DIVIDED / UNDIVIDED HIGHWAY

REVERSIBLE LANE


TWO WAY LEFT TURN LANE

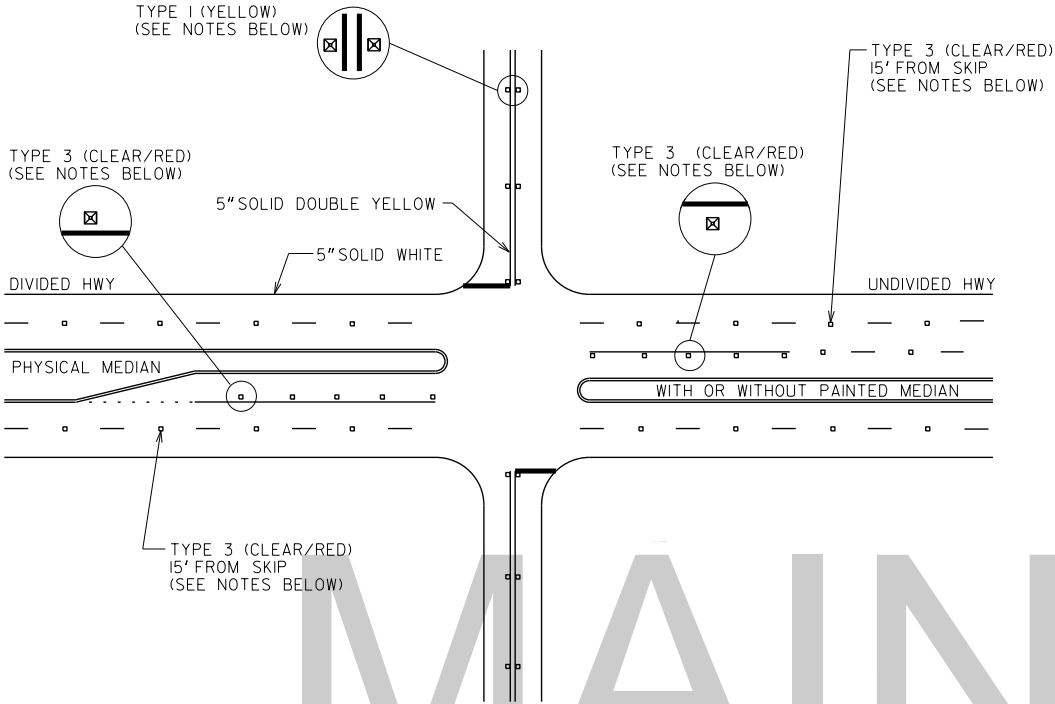

4'-0" STRIPED FLUSH MEDIAN

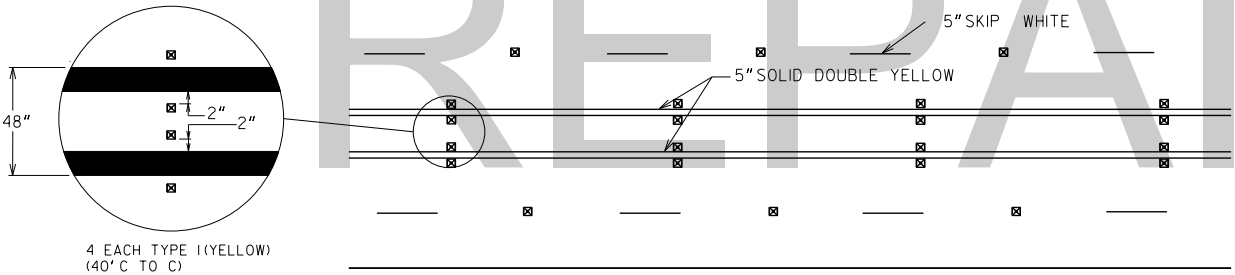


NO PASSING ZONE

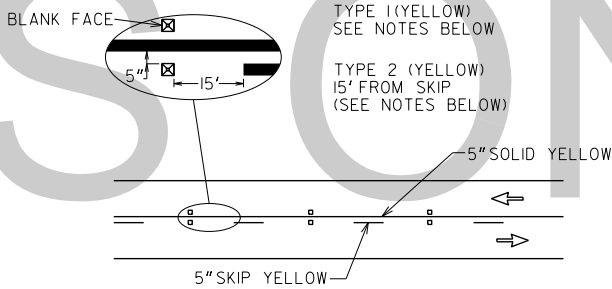

- GENERAL NOTES:
1. RAISED PAVEMENT MARKERS SHALL BE SPACED EVERY 40 FT UNLESS OTHERWISE SPECIFIED.
 2. ON SOLID WHITE TURN BAY LINES, SPACING SHALL BE 20 FT.
 3. RAISED PAVEMENT MARKERS SHALL BE OFFSET 5 INCHES FROM SOLID LANE LINES.
 4. CLEAR FACE OF TYPE 3 RAISED PAVEMENT MARKERS SHALL BE ORIENTED TOWARD ONCOMING TRAFFIC.

TYPICAL RPM/STRIPE SPACING

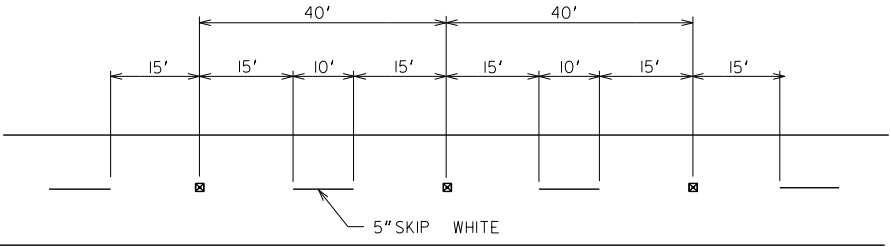

			9-15-2016	DATE	DEPARTMENT OF TRANSPORTATION STATE OF GEORGIA		
			REV. RPM SPACING TO 40'	REVISION	CONSTRUCTION DETAILS RAISED PAVEMENT MARKER LOCATION NON-LIMITED ACCESS ROADWAY		
					NO SCALE REV. AND REDRAWN, JUNE 2015		
		CDR	BY	DESIGNED _____ DRAWN _____ TRACED _____ CHECKED _____			NUMBER T-15A