



SECTION AT EXISTING BACKWALL

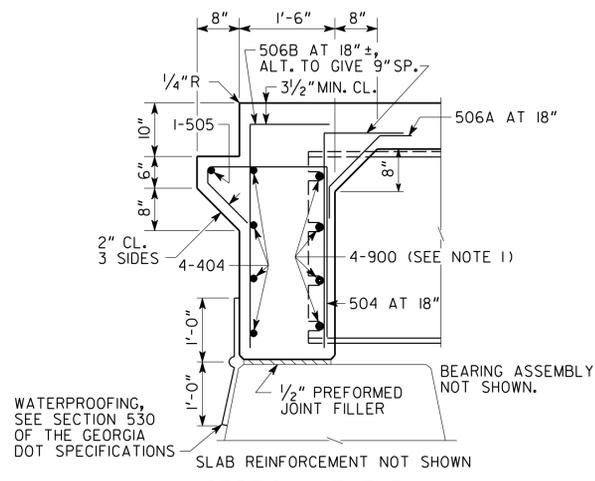


SECTION AT ENDWALL

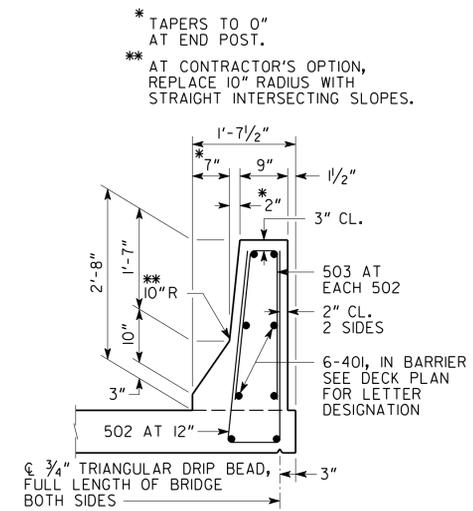


BARRIER DETAIL

USE ANVIL UNIVERSAL CONCRETE INSERT FIG. 282, COOPER B-LINE CONCRETE INSERT FIG. B3014, OR EQUAL. FURNISH AND INSTALL INSERTS. HANGER ASSEMBLIES WILL BE FURNISHED AND INSTALLED BY GAS COMPANY. SPACE HANGERS AT MAXIMUM OF 10'-0" O.C.

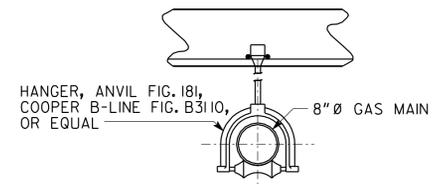


GAS MAIN SUPPORT DETAILS

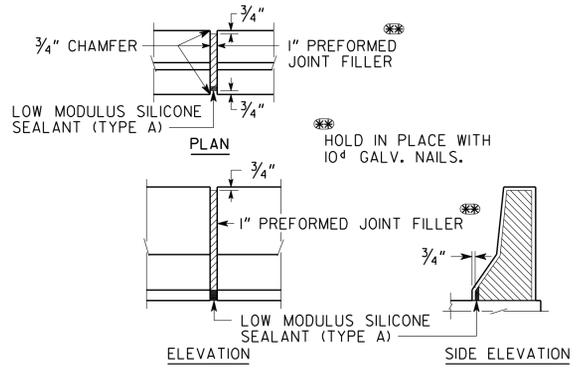


DETAILS OF 1" EXPANSION JOINT IN BARRIER

⊗ SEAL AS PER GEORGIA DOT SPECIFICATIONS SECTION 449.2.D. SEAL SHALL BE 2" (H) BY 1 3/4" WIDE PRIOR TO INSTALLATION.

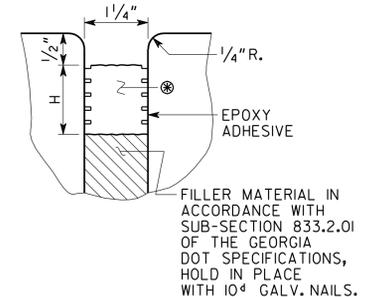

LONGITUDINAL SECTION EXPANSION JOINT DETAIL BENT 1 & 5 APPROACH

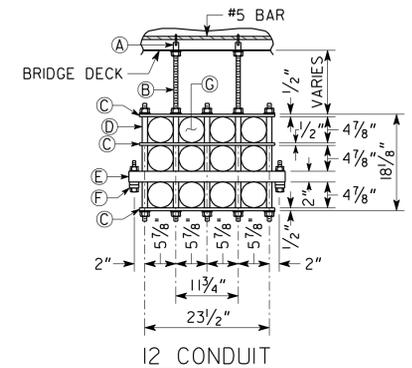

- Ⓐ 3/4" LOOP INSERT FOR 3/4" - 10 ROD.
- Ⓑ 3/4" - 10 GALVANIZED MACHINE ROD.
- Ⓒ 1/2" X 2" X 25 1/2" P.V.C. FLAT BAR.
- Ⓓ 1" X 4 7/8" P.V.C. SPACER TUBE.
- Ⓔ 1/4" X 2" X 2" X 29 1/2" FIBERGLASS TUBE.
- Ⓕ STRAND CLAMP.
- Ⓖ 4" DIA. FIBERGLASS CONDUIT.

DETAIL OF HANGER FOR TELEPHONE CONDUIT

NOTE: PLACE HANGER ATTACHMENTS AT INTERVALS OF UP TO 10 FT.

BRIDGE NO. 1LT. & RT.

AECOM


GEORGIA DEPARTMENT OF TRANSPORTATION
PRECONSTRUCTION DIVISION-OFFICE OF BRIDGE DESIGN

MISCELLANEOUS SUPERSTRUCTURE DETAILS
WIDENING SR 1/US 27 OVER SR 166


CARROLL COUNTY NH000-0017-01(022)

SCALE: NO SCALE U.N.O. MARCH 2011

PLACE TRANSVERSE MARKINGS SPACED AT 5'-0" ±.
COST OF BOND BREAKER AND EPOXY ADHESIVE TO BE INCLUDED IN PRICE BID FOR SUPERSTRUCTURE ITEMS.

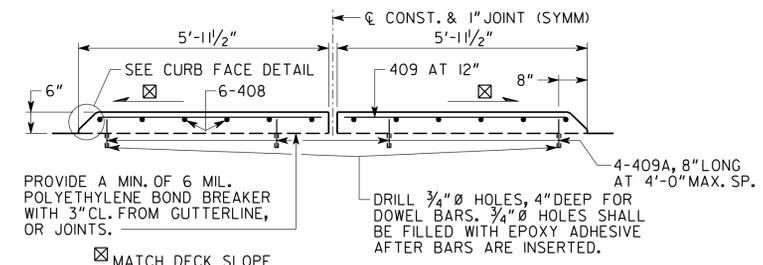

CONCRETE MEDIAN DETAILS

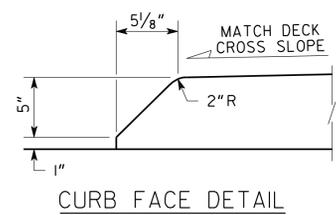

CURB FACE DETAIL

NOTES:

1. DRILL SLOTS IN EXISTING BEAMS FOR 900 BARS. PROVIDE SLOTS IN NEW BEAMS FOR 900 BARS.
2. PROVIDE TEMPORARY SUPPORT FOR UTILITIES DURING STAGE III DECK REPLACEMENT. SUBMIT TEMPORARY SUPPORT DETAILS TO THE ENGINEER FOR APPROVAL. INCLUDE COST FOR THIS WORK IN THE OVERALL BID SUBMITTED.
3. MAINTAIN 2" CL. ON ALL REINFORCEMENT UNLESS OTHERWISE NOTED.

DRAWING NO. 35-07
BRIDGE SHEET 7 OF 18

DATE	
REVISIONS	
BY	

DESIGNED	LS	CHECKED	GLE	REVIEWED	WMD/WEI
DRAWN	LS	DOT LIAISON	CB	APPROVED	BFR