


ELEVATION

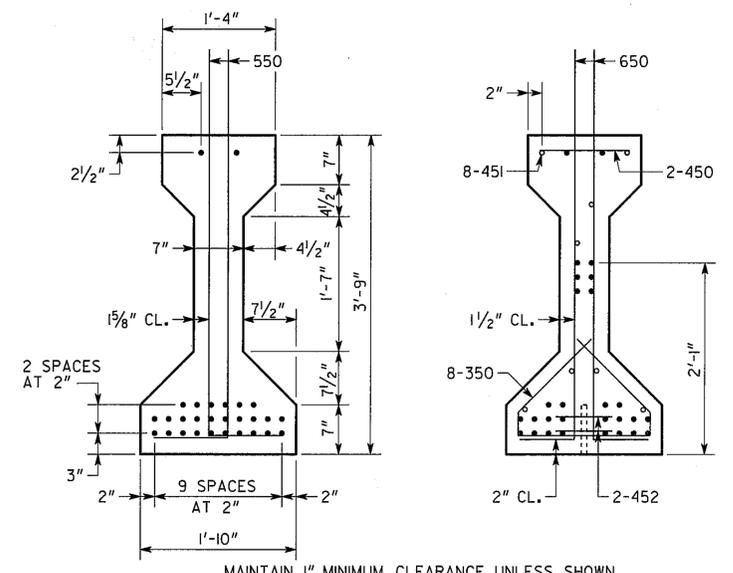


SECTION AT MIDPOINT SECTION AT END

MAINTAIN 1" MINIMUM CLEARANCE UNLESS SHOWN.  
• INDICATES 0.6" DIAMETER PRESTRESSED STRANDS.


NOTES

- BEAMS SHALL BE MAINTAINED IN AN UPRIGHT POSITION AT ALL TIMES AND SHALL BE PICKED UP WITHIN 5'-6" FROM THEIR ENDS. DISREGARDING THIS REQUIREMENT COULD LEAD TO COLLAPSE OF THE BEAM. PICK-UPS SHALL BE EMBEDDED TO WITHIN 4" OF THE BOTTOM OF THE BEAM. DETAILS OF PICK-UPS SHALL BE INCLUDED IN THE SHOP DRAWINGS.
- CHAMFER EDGES OF BEAMS 1/2" OR 3/4".
- HORIZONTAL DIMENSIONS ARE IN PLACE DIMENSIONS. THE BEAM LENGTH INCLUDES THE 1/8" EPOXY MORTAR AT EACH END. SHOP DRAWINGS SHALL ADJUST HORIZONTAL DIMENSIONS FOR GRADE AND FABRICATION EFFECTS SUCH AS SHRINKAGE AND ELASTIC SHORTENING.
- AT  $\text{C}$  BEARING, FORM A 1 1/2" DIAMETER X 7" DEEP HOLE AT THE FIXED ENDS AND A 4" X 1 1/2" X 7" DEEP SLOT AT THE EXPANSION ENDS FOR A 1 1/4" DIAMETER SMOOTH DOWEL. SEE PLAN AND ELEVATION SHEET FOR LOCATION OF FIXED AND EXPANSION ENDS.
- TOPS OF BEAMS SHALL BE ROUGH FLOATED AT APPROXIMATELY THE TIME OF INITIAL SET. ENTIRE TOP SHALL BE SCRUBBED TRANSVERSELY WITH A COARSE BRUSH TO REMOVE ALL LAITANCE AND TO PRODUCE A ROUGHENED SURFACE FOR BONDING TO THE SLAB. ROUGHENED SURFACE SHALL HAVE AN AMPLITUDE OF APPROXIMATELY 1/4". CONCRETE FINS OR PROJECTIONS SHALL BE REMOVED TO PRODUCE A VERTICAL FACE AT THE EDGE OF THE BEAM.
- NON-COMPOSITE DEAD LOAD DEFLECTION ( $\Delta_{NC}$ ) AT THE MIDPOINT IS DUE TO THE WEIGHT OF THE SLAB AND COPING.
- COMPOSITE DEAD LOAD DEFLECTION ( $\Delta_C$ ) AT THE MIDPOINT IS DUE TO THE WEIGHT OF BARRIER.
- STRANDS SHALL MEET ALL REQUIREMENTS OF ASTM A 416 GRADE 270.
- PRESTRESSING DATA IS AS FOLLOWS:
  - USE 28 - 0.6" DIAMETER SPECIAL LOW-RELAXATION ( $A = 0.217 \text{ SQ IN}$ ) STRANDS. PRETENSION STRANDS TO 43,943 LBS EACH.
  - PRETENSIONED STRANDS SHALL BE RELEASED AFTER THE CONCRETE HAS REACHED A MINIMUM STRENGTH ( $f'_c$ ) OF 6,000 PSI.
  - THE TOTAL JACKING FORCE OF PRETENSIONING IS 1,230,404 LBS.
  - THE NET PRESTRESSING FORCE OF THE STRANDS AFTER LOSSES IS 921,657 LBS.
  - ALLOWABLE TENSION = 520 PSI.
- CONCRETE STRENGTH ( $f'_c$ ) = 7,500 PSI.

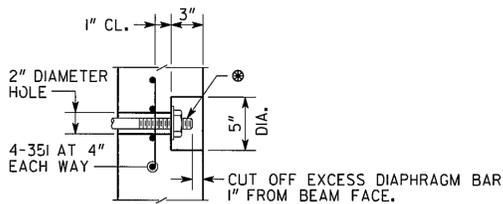

DIAPHRAGM BAR SHALL BE A 1" DIAMETER PLAIN BAR, THREADED 5" ON EACH END, WITH 1/4" X 3/2" DIAMETER WASHERS AND HEX NUTS (ASTM A 709 GRADE 36). DIAPHRAGM BAR SHALL BE TIGHTENED AS PER SUB-SECTION 507.3.05.C OF THE GEORGIA DOT SPECIFICATIONS. AFTER EXCESS DIAPHRAGM BAR HAS BEEN CUT OFF, END OF DIAPHRAGM BAR, WASHER, AND NUT EXPOSED IN RECESS SHALL BE PAINTED WITH SPECIAL PROTECTIVE COATING NO. 2 P AS PER SECTION 535 OF THE GEORGIA DOT SPECIFICATIONS. AFTER PAINTING, THE RECESS SHALL BE FILLED WITH AN APPROVED EPOXY GROUT. GALVANIZING OF DIAPHRAGM BAR AS PER SUB-SECTION 865.2.01.BJ2 OF THE GEORGIA DOT SPECIFICATIONS IS NOT REQUIRED.

RECESS DETAIL FOR DIAPHRAGM BAR ENDS



BEVEL DETAILS

REINFORCEMENT	
ALL BAR DIMENSIONS ARE OUT TO OUT.	
AT THE TOP OF THE BEAM, BARS 550 AND 650 SHALL BE FIELD BENT OR SHOP BENT 90°, SUCH THAT THE HORIZONTAL LEG EXTENDS BETWEEN TOP AND BOTTOM MATS OF SLAB REINFORCEMENT.	
SLIGHTLY SHIFT OR SLOPE BARS 451 TO AVOID CONFLICT WITH STRANDS.	
BARS 350 MAY BE FABRICATED IN TWO PARTS BY LAPPING HORIZONTAL SECTION BY 1'-0" MINIMUM.	
PLACE BARS 452 WITH OPEN ENDS AWAY FROM BEAM ENDS.	

BRIDGE NO. 1 - ALTERNATE 1 OR 2

DATE		REVISIONS		BY	
GEORGIA <b>DEPARTMENT OF TRANSPORTATION</b> PRECONSTRUCTION DIVISION-OFFICE OF BRIDGE DESIGN					
TYPE III PSC BEAM - INTERMEDIATE SPAN CR 19 (OLD FEDERAL ROAD) OVER CSX TRANSPORTATION MURRAY COUNTY STPOO-0213-00(013)					
NO SCALE			FEBRUARY 2010		
DESIGNED	DLC	CHECKED	SWW	REVIEWED	WMD/WEI
DRAWN	WMC	DESIGN GROUP	SWW	APPROVED	PVL

DRAWING NO.	35-09
BRIDGE SHEET	9 OF 16