STATE	PROJECT NUMBER	SHEET NO.	TOTAL SHEETS
GA.	TSAP 193(9)	68	135

DETAIL OF CONCRETE SLAB WELL COVER



NOTE: Concrete Slab required over Well shall be placed to a Minimum Depth of 2'-6" below subgrade. Class "A" Concrete shall be used.

QUANTITIES: 0.89 CU. YDS. Class "A" Concrete. 107 LBS. Bar Reinforcement Steel.

DETAIL OF TURNOUTS - RURAL

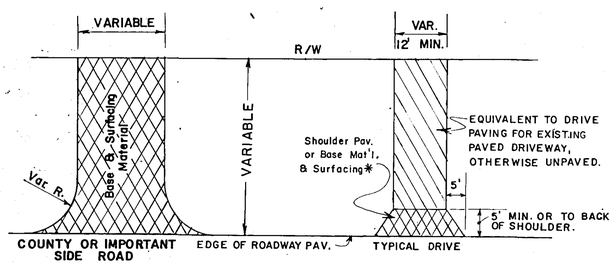

All turnouts are to be constructed as directed by the Engineer.

In general, 15' radii are to be used for County Roads and may be increased up to 50' on important County Roads where necessary to take care of turning movements.

*Driveway Paving may be omitted on lower class Roads.

FORM EF3

STATIONING OF CONCRETE PAVEMENT

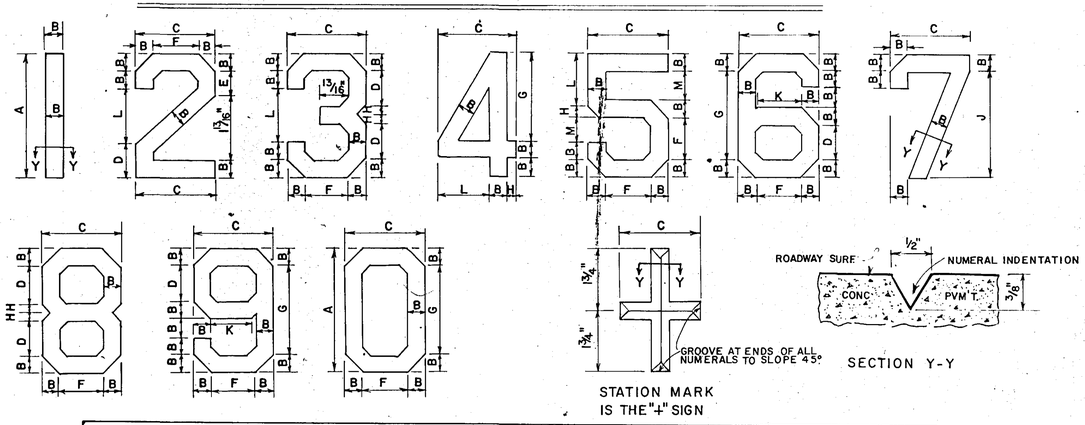

DIMENSIONS FOR NUMERALS (Inches)											
A	B	C	D	E	F	G	H	J	K	L	M
3½	½	2¼	1	11/16	1¼	2½	¼	3	1⅛	½	¾

DETAILS OF NUMERALS AND STATION MARK "+"

NOTE: Every fifth station shall be stamped in concrete pavement with dies just before the initial set.

Undivided Highways - Stationing shall be placed within a one foot strip along the edge of pavement, right of the ℄.

Divided Highways - Stationing shall be placed within a one foot strip along the outer edge of pavement, right and left of the ℄.

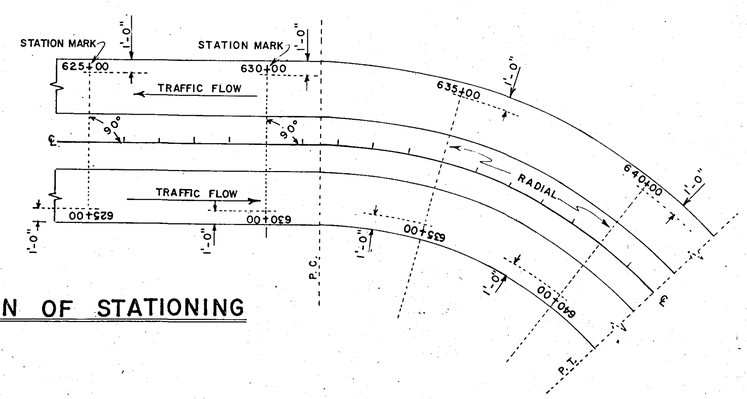

PLAN OF STATIONING

DEPARTMENT OF TRANSPORTATION
STATE OF GEORGIA

STANDARD

STATIONING OF CONCRETE PAVEMENT
CONCRETE SLAB WELL COVER
DETAIL OF TURNOUTS-RURAL

NO SCALE — REV. & REDR. NOVEMBER, 1979

DES. DEC.'57 RETRACED G.M.E. NOV.'79 — (SUBMITTED) Floyd E. Hardy, STATE ROAD & AIRPORT DESIGN ENGR. — (APPROVED) Thomas H. Moreland, STATE HIGHWAY ENGINEER.

NUMBER 9031H