

STATE	PROJECT NUMBER	SHEET NO.	TOTAL SHEETS
GA.	CM-285-I(377)	4	258

GENERAL NOTES

1. THE CONTRACTOR SHALL LOCATE ALL UTILITIES BEFORE DIGGING TO ELIMINATE ANY CONFLICTS. TO OBTAIN HIGHWAY LIGHTING PLANS, THE CONTRACTOR SHALL CONTACT THE DEPARTMENT AT (404) 656-5396. TO OBTAIN DRAINAGE PLANS, THE CONTRACTOR SHALL CONTACT THE DEPARTMENT'S FILE PLANS ROOM AT (404) 656-5408. FOR GDOT ATMS FACILITIES THAT MAY BE IMPACTED, THE CONTRACTOR SHALL CONTACT THE GDOT PROJECT ENGINEER.
2. EXISTING INDUCTIVE LOOPS OR LEAD-IN WIRES THAT ARE CUT, DAMAGED, OR DESTROYED SHALL NOT BE REPAIRED BY SPlicing. ALL LOOPS OR LEAD-IN WIRES THAT ARE CUT, DAMAGED, OR DESTROYED SHALL BE REPLACED ENTIRELY WITHIN TWO WEEKS AT NO ADDITIONAL COST TO THE DEPARTMENT. ANY EXISTING INDUCTIVE LOOPS SHOWN ON THE PLANS ARE FOR INFORMATION ONLY. THE CONTRACTOR SHALL CONTACT THE OFFICE OF TRANSPORTATION DATA AT (770) 986-1435 ONE WEEK PRIOR TO DOING ANY WORK AT THESE LOCATIONS. LOOPS ARE LOCATED SOUTH OF WASHINGTON RD. OVERPASS AND SOUTH OF ORCHARD RD. OVERPASS IN NORTHBOUND AND SOUTHBOUND LANES.
3. THE CONTRACTOR SHALL CONTACT THE GDOT PROJECT ENGINEER TO LOCATE GDOT ITS INFRASTRUCTURE AT LEAST 72 HOURS IN ADVANCE OF ALL WORK AROUND EXISTING HUB BUILDINGS.
4. THE CONTRACTOR SHALL REPAIR ANY EXISTING CONDUIT, PIPE, OR FIBER/CABLE THAT IS DAMAGED BY THE CONTRACTOR AT NO ADDITIONAL COST TO THE DEPARTMENT. ANY DAMAGED FIBER/CABLE SHALL BE REPAIRED WITHIN 24 HOURS OR LIQUIDATED DAMAGES SHALL INCUR. SEE GEORGIA SPECIFICATIONS SECTION 108.
5. THE CONTRACTOR SHALL REPLACE IN LIKE KIND AND SIZE, AT NO ADDITIONAL COST TO THE DEPARTMENT, ANY PAVEMENT MARKINGS, BARRIER WALL, FENCE, DITCH PAVING, CURBING, SIDEWALK, GUTTER, SLOPE PAVEMENT, SIGNS, GUARDRAIL, LANDSCAPING (IN ACCORDANCE WITH GEORGIA SPECIFICATIONS SECTION 702), GRASSING (IN ACCORDANCE WITH GEORGIA SPECIFICATIONS SECTION 700), UTILITY SERVICE LINES, STORM DRAIN PIPES, RUMBLE STRIPS, ROADWAY, AND ANY RETAINING WALLS THAT ARE DAMAGED OR DESTROYED BY ANY WORK PERFORMED AS PART OF THIS PROJECT. THE CONTRACTOR WILL NOT BE REQUIRED TO MAINTAIN LANDSCAPING AS SPECIFIED IN SECTION 702.3.07 OF THE GEORGIA SPECIFICATIONS.
6. THE CONTRACTOR SHALL REMOVE ALL EXISTING PAVEMENT MARKINGS THAT ARE IN CONFLICT BY A METHOD OTHER THAN GRINDING. REMOVAL METHOD MUST BE APPROVED BY PROJECT ENGINEER. PAYMENT SHALL BE INCLUDED IN THE OVERALL BID PRICE FOR TRAFFIC CONTROL.
7. FIBERGLASS OR RIGID STEEL CONDUIT SHALL BE USED (AS SHOWN ON PLANS) AT ALL EXPOSED CONDUIT LOCATIONS.
8. THE CONTRACTOR SHALL REMOVE PAVEMENT BY SAW CUT TO PROVIDE A NEAT LINE. WHERE CONDUIT IS INSTALLED, THE CONTRACTOR SHALL INLAY TO MATCH EXISTING SURFACE TYPE AFTER CONDUIT IS INSTALLED. PAVEMENT REMOVAL AND PAVEMENT INLAY SHALL BE INCLUDED IN THE BID PRICE FOR CONDUIT DUCT BANK OR CONDUIT.
9. ANY REQUIRED EROSION CONTROL DEVICES WILL NOT BE MEASURED SEPARATELY AND SHALL BE INCLUDED IN THE COST OF THE OVERALL BID.
10. THE ELECTRIC POWER SERVICE ASSEMBLY POINTS SHOWN ON THE PLANS ARE FOR THE CONTRACTOR'S USE IN DETERMINING POWER ROUTING TO EACH DEVICE. THE CONTRACTOR SHALL COORDINATE WITH THE LOCAL ELECTRICAL UTILITY COMPANIES TO PROVIDE POWER TO THE SERVICE RISER POINTS. PAYMENT FOR TYPE 2 CONDUIT FOR ELECTRIC POWER SERVICE INCLUDES ALL MATERIALS AND LABOR TO PROVIDE A CONNECTION BETWEEN THE SERVICE POINTS AND THE EQUIPMENT CABINETS.
11. ALL PROPOSED STRAIN POLES SHALL BE INSTALLED A MINIMUM OF 6 FEET BEHIND EXISTING OR PROPOSED GUARDRAIL WHERE SHOWN ON THE PLANS.
12. NO NOTICE OF INTENT IS REQUIRED FOR THIS PROJECT.
13. MINOR TREE TRIMMING AND REMOVAL MAY BE REQUIRED AS DIRECTED BY THE ENGINEER.
14. CABINETS, CAMERAS, CONTROLLERS AND OTHER ELECTRONIC DEVICES THAT ARE REMOVED AS PART OF THIS PROJECT SHALL BE RETURNED TO THE GDOT TRAFFIC SIGNALS AND ELECTRICAL FACILITIES BUILDING AT 935 EAST CONFEDERATE AVENUE, BUILDING 5, ATLANTA, GA 30316 AT NO ADDITIONAL COST TO THE DEPARTMENT. THE CONTRACTOR SHALL CALL THE TRAFFIC SIGNAL MAINTENANCE ENGINEER AT (404) 635-8900 AT LEAST 72 HOURS IN ADVANCE TO ARRANGE DELIVERY OF THESE COMPONENTS.
15. CONDUIT UNDER RAMPS SHALL BE INSTALLED BY DIRECTIONAL BORING, UNLESS NOTED OTHERWISE ON THE PLANS.
16. THE REMOVAL OF GUARDRAIL ANCHORAGES SHALL BE INCLUDED IN THE OVERALL BID PRICE FOR GUARDRAIL.
17. THE CONTRACTOR SHALL INSTALL CONDUIT IN SAG VERTICAL CURVES BY DIRECTIONAL BORING TO AVOID TRANSVERSE UNDERDRAINS. DIRECTIONAL BORES SHALL BEGIN AND END AT PULL BOXES OR ECBS SHOWN ON THE PLANS AND A MINIMUM OF 100 FEET FROM THE LOW POINT OF THE VERTICAL CURVE.
18. PULL BOX LOCATIONS SHOWN ON THE PLANS CAN BE ADJUSTED IN THE FIELD AS DIRECTED BY THE ENGINEER TO BE PLACED BETWEEN EXISTING TRANSVERSE SHOULDER JOINTS AND LONGITUDINAL MAINLINE EDGE OF PAVING JOINT. EXISTING CONCRETE SHOULDER PAVEMENT SHALL BE REMOVED FROM TRANSVERSE JOINT TO TRANSVERSE JOINT FOR PLACEMENT OF THE PULL BOX. PAYMENT FOR CONCRETE REMOVAL SHALL BE INCLUDED IN BID PRICE FOR CONCRETE REPLACEMENT. REPLACEMENT CONCRETE SHALL BE INSTALLED IN ACCORDANCE WITH GEORGIA SPECIFICATIONS SECTION 439 - PORTLAND CEMENT CONCRETE PAVEMENT.

UTILITIES CONTACT INFORMATION

MR BRIAN LEAVELL
ATLANTA GAS LIGHT CO
LOCATION 1355
1219 CAROLINE ST.
ATLANTA GA 30307
PHONE 404 584-4702

JON CLARK JR.
GEORGIA POWER COMPANY
BIN 39066
829 JEFFERSON ST.
ATLANTA, GA 30318
PHONE:

MR. PETER TINUBU
CITY OF ATLANTA
DEPARTMENT OF WATER
651 14TH ST., N.W.
ATLANTA, GA 30318
PHONE: (404) 235-2029

DAN EVERITT
GEORGIA POWER TRANSMISSION
BIN 20033
241 RALPH MCGILL BLVD., N.E.
ATLANTA GA 30308-3374
PHONE:

MR. SANDY BEASLEY
GREYSTONE POWER CORPORATION
4040 BANKHEAD HIGHWAY
P.O. BOX 897
DOUGLASVILLE, GA 30133
PHONE: (770) 949-7880

EDWARD W. CREWS
CITY OF EAST POINT POWER
2777 EAST POINT ST CITY ANNEX
EAST POINT GA 30344
PHONE: (404) 765-1183




Dig | Safely.
1-800-282-7411
770-623-4344

THE CONTRACTOR SHALL ADHERE TO THE "CALL BEFORE YOU DIG" LAW BY CALLING THE UNDERGROUND PROTECTION CENTER AT 1-800-282-7411 OR 770-623-4344 BEFORE BEGINNING CONSTRUCTION.



G R E S H A M
S M I T H A N D
P A R T N E R S

TRANSCORE®

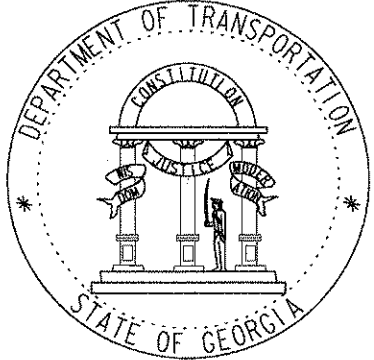

OFFICE OF TRAFFIC SAFETY & DESIGN

DATE	REVISIONS
5/24/06	REV. NOTE 2

GEORGIA DEPARTMENT OF TRANSPORTATION
1-285 SOUTHWEST ATMS
GENERAL NOTES
PROJECT - PI713371
COUNTY - FULTON
DATE - __/__/__ SHEET 4-01

\$FILE\$
\$DATE\$