



STATE	PROJECT NUMBER	SHEET NO.	TOTAL SHEETS
GA.	CM-285-1(377)	87	258

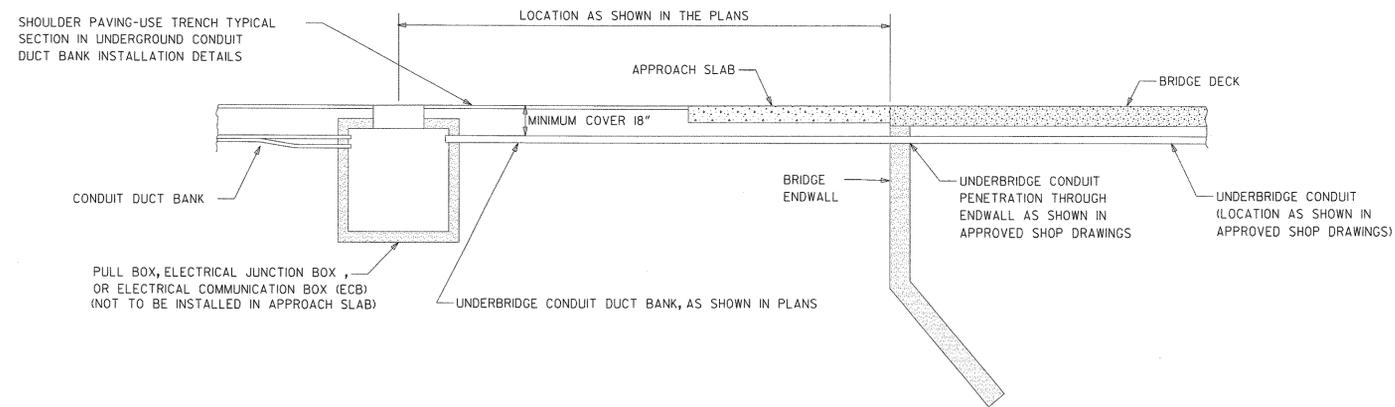

TYPICAL UNDERBRIDGE CONDUIT TERMINATION

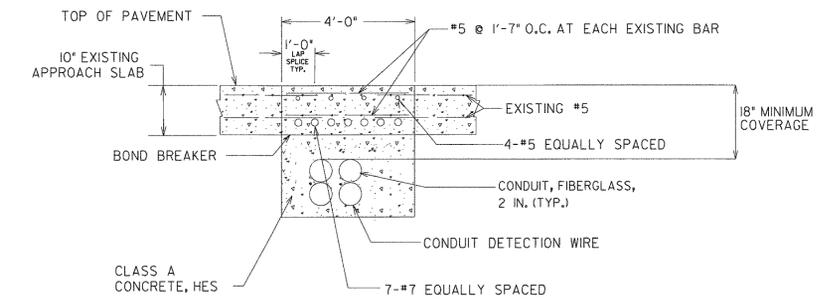


TYPICAL SECTION AT APPROACH SLAB

NOTE: #5 AND #7 BAR REINFORCEMENT SHALL BE IN ACCORDANCE WITH GA. STANDARD 9017P - REINFORCED CONCRETE APPROACH SLAB. APPROACH SLAB MATERIALS AND CONSTRUCTION SHALL BE IN ACCORDANCE WITH SECTION 433 OF THE GDOT SPECIFICATIONS.

COST OF SAW CUTTING, TRENCHING, BAR REPLACEMENT, CONCRETE, CONDUIT DETECTION WIRE, AND RESTORATION SHALL BE INCLUDED IN THE OVERALL BID PRICE OF CONDUIT OR CONDUIT DUCT BANK.

CONTRACTOR SHALL MAINTAIN EXISTING EXPANSION JOINT BETWEEN APPROACH SLAB AND BRIDGE ABUTMENT. IF DAMAGED, COST OF REPLACEMENT SHALL BE BORNE BY CONTRACTOR. JOINT REPLACEMENT, IF REQUIRED SHALL MATCH EXISTING JOINT MATERIAL, AND SHALL BE APPROVED BY THE ENGINEER.

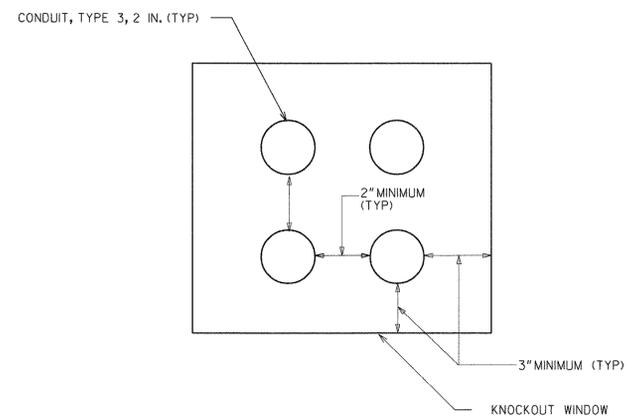

UNDERBRIDGE CONDUIT DUCT BANK-ECB OR EJB TERMINATION



GRESHAM  
SMITH AND  
PARTNERS



NOT TO SCALE



OFFICE OF TRAFFIC SAFETY & DESIGN

DATE	REVISIONS

GEORGIA DEPARTMENT OF TRANSPORTATION  
UNDER BRIDGE CONDUIT  
DUCT BANK INSTALLATION  
PROJECT - P171337I  
COUNTY - FULTON  
DATE - \_\_/\_\_/\_\_ SHEET 40-15

\$FILE\$  
\$DATE\$