


STATE	PROJECT NUMBER	SHEET NO.	TOTAL SHEETS
GA.	CM-285-1(378)	33	110

GENERAL NOTES:

1. INSTALL CABLE NAV05-0235 IN CONDUIT #1 OF THE DUCT BANK FROM THE PB AT STA. 503+00 +/- (ON I-285 EB) TO THE EXISTING ECB AT STA. 597+50 +/- (ON I-285 EB). INSTALL CABLE COILS AND CLOSURES FOR NAV05-0235 ON THE LOWEST RACK POSITION OF THE PULL BOXES
2. INSTALL CABLE NAV05-0228 IN CONDUIT #1 OF THE DUCT BANK FROM THE PB AT STA. 505+50 +/- (ON I-285 WB) TO THE EXISTING ECB AT STA. 538+00 +/- (ON I-285 WB). INSTALL CABLE COILS AND CLOSURES FOR NAV05-0228 ON THE LOWEST RACK POSITION OF THE PULL BOXES.
3. INSTALL CABLE NAV05-0228 IN EXISTING UNOCCUPIED CONDUIT (IDENTIFIED DURING CONSTRUCTION) FROM THE EXISTING ECB AT STA. 538+00 +/- (ON I-285 WB) TO THE EXISTING ECB AT STA. 704 + 11 +/- (ON THE RAMP FROM I-75 SB)
4. INSTALL CABLE NAV05-0235 IN EXISTING UNOCCUPIED CONDUIT (IDENTIFIED DURING CONSTRUCTION) FROM THE EXISTING ECB AT STA. 597+50 +/- (ON I-285 EB) TO THE EXISTING ECB AT STA. 597 + 45 +/- (ON I-285 WB).
5. INSTALL CABLE NAV05-0235 IN EXISTING UNOCCUPIED CONDUIT (IDENTIFIED DURING CONSTRUCTION) FROM THE EXISTING ECB AT STA. 597+45 +/- (ON I-285 WB) TO THE EXISTING ECB AT STA. 633+20 +/- (ON I-285 WB).
6. INSTALL CABLE NAV05-0235 IN CONDUIT #1 CROSSING THE LOOP ROAD BRIDGE FROM THE EXISTING ECB AT STA. 633+20+ (ON I-285 WB) TO THE PB AT STA. 635+00 +/- (ON I-285 EB). INSTALL CABLE COILS AND CLOSURES FOR NAV05-0235 ON THE LOWEST RACK POSITION OF THE PULL BOXES AND ECBS.
7. INSTALL CABLE NAV05-0235 IN CONDUIT #1 OF THE DUCT BANK FROM THE PB AT STA. 635+00 +/- (ON I-285 EB) TO THE EXISTING ECB AT STA. 704+10 +/- (ON I-285 EBCD). INSTALL CABLE COILS AND CLOSURE FOR NAV05-0235 ON THE LOWEST RACK POSITION OF THE PULLBOXES.
8. INSTALL CABLE NAV05-0235 IN EXISTING UNOCCUPIED CONDUIT (IDENTIFIED DURING CONSTRUCTION) FROM THE EXISTING ECB AT STA. 704+10 +/- (ON I-285 EB) TO THE EXISTING ECB (ON I-75 SB).
9. INSTALL CABLE NAV05-0235 IN EXISTING UNOCCUPIED CONDUIT (IDENTIFIED DURING CONSTRUCTION) FROM THE EXISTING ECB (ON I-75 SB) TO THE EXISTING ECB (OFF I-75 SB) AT HUB L.
10. INSTALL CABLE NAV05-0228 IN EXISTING UNOCCUPIED CONDUIT (IDENTIFIED DURING CONSTRUCTION) AT STA. 704+11 +/- (ON THE RAMP FROM I-75 NB) TO THE EXISTING ECB (OFF I-75 NB) AT HUB L.

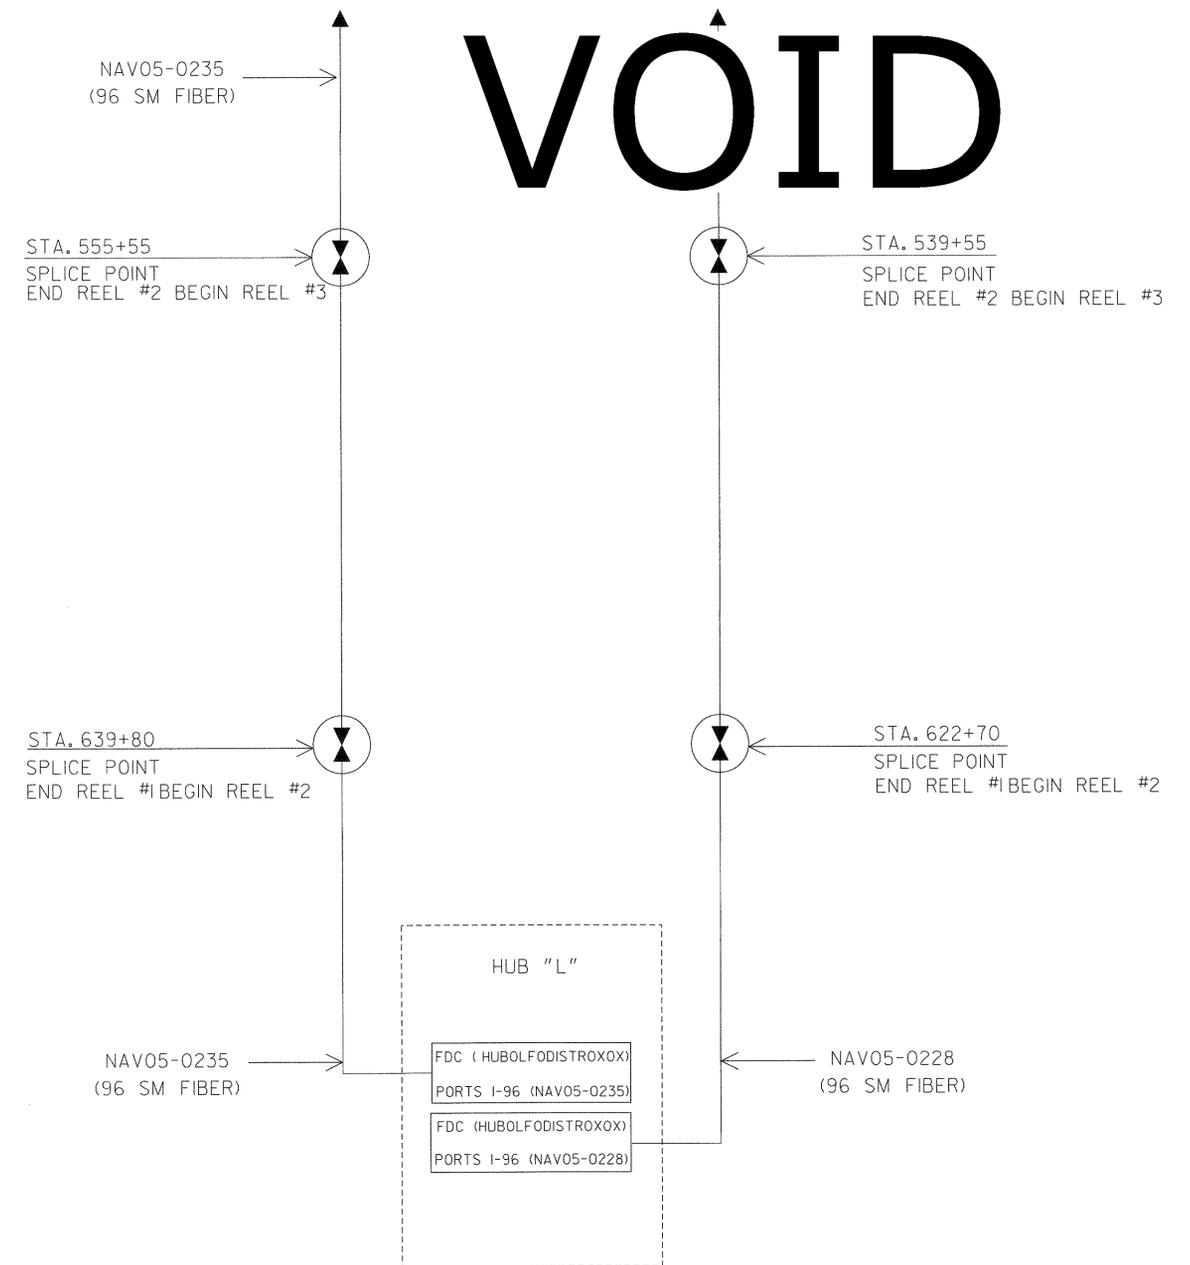

G R E S H A M
S M I T H A N D
P A R T N E R S



NOT TO SCALE



OFFICE OF TRAFFIC SAFETY & DESIGN

DATE	REVISIONS

GEORGIA DEPARTMENT OF TRANSPORTATION
I-285 SOUTH ATMS
FIBER ROUTING SCHEMATIC
PROJECT - PI713372
COUNTY - FULTON & CLAYTON
DATE - ___/___/___ SHEET 28-17

\$FILE\$
\$DATE\$